

WAAS CH 56309 W03A	APP CRS 029°	Rwy Idg TDZE 940 Apt Elev 948	5498
--	------------------------	---	-------------

RNAV (GPS) RWY 3

GEORGETOWN-SCOTT COUNTY RGNL (27K)


⚠

NA


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 47° C (116° F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase LPV DA to 1178, LNAV/VNAV DA to 1413, and all MDA 40 feet; increase LPV and LNAV/VNAV visibility all Cats and LNAV Cat C and Circling Cat D visibility ¼ mile. Baro-VNAV and VDP NA when using Lexington altimeter setting.

MISSED APPROACH: Climb to 3000 direct ETOXY and left turn on track 281° to GENUS and hold.

AWOS-3 119.975	LEXINGTON APP CON 120.15 259.3 (040° - 220°) 120.75 298.9 (221° - 039°)	CLNC DEL 127.425	UNICOM 123.0 (CTAF) 0
--------------------------	---	----------------------------	---------------------------------

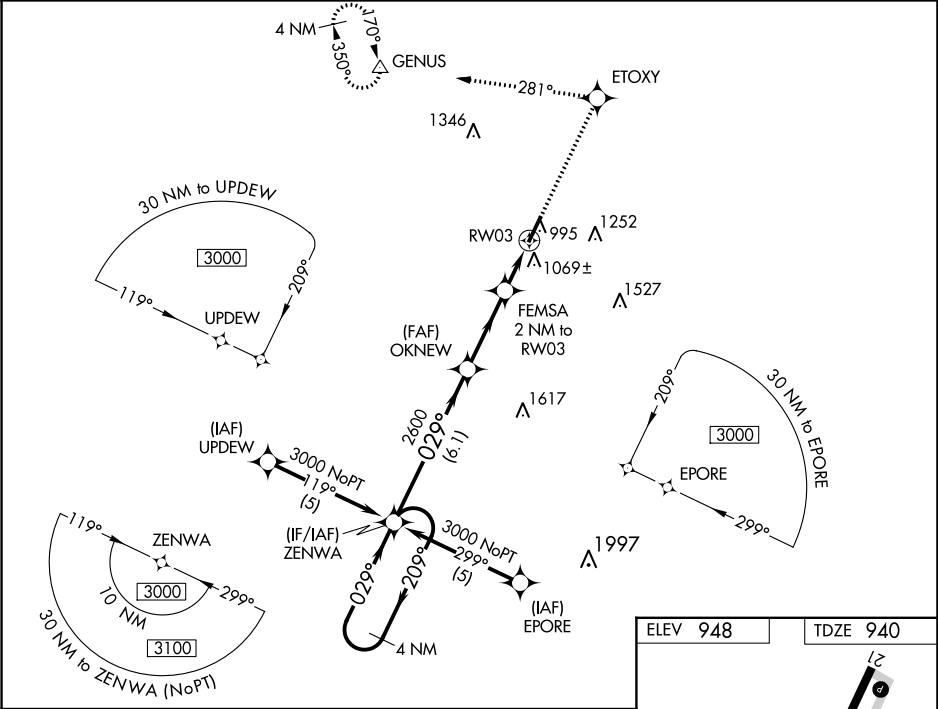

4 NM Holding Pattern	ZENWA	3000	ETOXY	GENUS
GP 3.00° TCH 34	2600	FEMSA 2 NM to RW03	*LNAV only.	
6.1 NM	3.1 NM	0.9 NM	1.1 NM	
CATEGORY	A	B	C	D
LPV DA		1140-3/4	200 (200-3/4)	
LNAV/VNAV DA		1375-1 1/2	435 (500-1 1/2)	
LNAV MDA		1320-1	380 (400-1)	1320-1 1/4 380 (400-1 1/4)
CIRCLING	1420-1	472 (500-1)	1560-1 3/4 612 (700-1 3/4)	1660-2 1/4 712 (800-2 1/4)

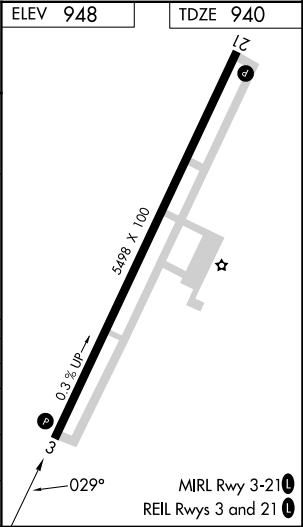

APP CRS
209°

Rwy Idg
TDZE
Apt Elev

5498
948
948

RNAV (GPS) Y RWY 21


GEORGETOWN-SCOTT COUNTY RGNL (27K)

NA

DME/DME RNP-0.3 NA. VDP NA with Lexington altimeter setting. When local altimeter setting not received, use Lexington altimeter setting and increase all MDAs 40 feet, increase LNAV Cats C/D and Circling Cat D visibility ¼ SM.

MISSED APPROACH: Climbing right turn to 3000 direct GENUS and hold.

AWOS-3 119.975	LEXINGTON APP CON 120.15 259.3 (040° - 220°) 120.75 298.9 (221° - 039°)	CLNC DEL 127.425	UNICOM 123.0 (CTAF) 0
-------------------	--	---------------------	--------------------------

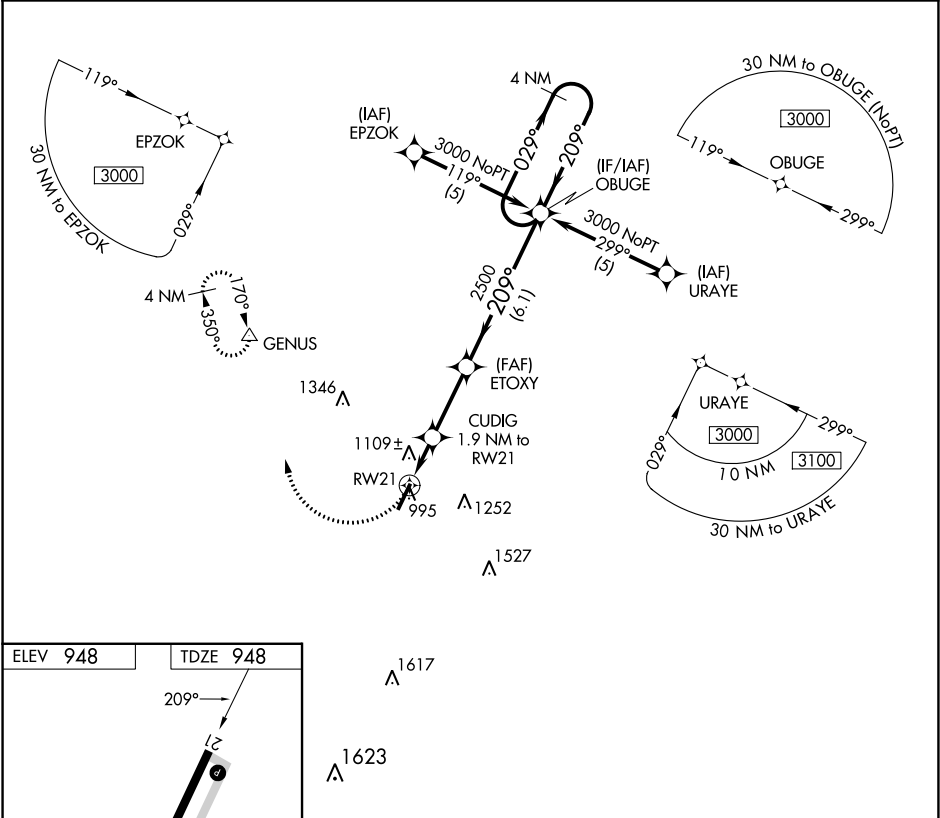

ELEV 948

TDZE 948

3000 GENUS

CUDIG 1.9 NM to RW21

ETOXY

OBUGE

4 NM Holding Pattern

3000

209°

029°

209°

3000

1.2 NM

0.7 NM

2.8 NM

6.1 NM

CATEGORY	A	B	C	D
LNAV MDA	1360-1	412 (500-1)	1360-1¼	412 (500-1¼)
CIRCLING	1420-1	472 (500-1)	1560-1¾ 612 (700-1¾)	1660-2¼ 712 (800-2¼)



WAAS CH 48909 W21A	APP CRS 209°	Rwy Idg 5498 TDZE 948 Apt Elev 948
--	------------------------	---

RNAV (GPS) Z RWY 21
GEORGETOWN-SCOTT COUNTY RGNL (27K)

NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase LPV DA to 1186, LNAV/VNAV DA to 1460, and all MDA 40 feet; increase LPV all Cats and LNAV Cats C/D and Circling Cat D visibility ¼ SM. Baro-VNAV and VDP NA with Lexington altimeter setting.

MISSED APPROACH: Climb to 3000
direct YAPUT and right turn on track
301° to SOKOC and right turn on
track 049° to GENUS and hold.

AWOS-3 119,975	LEXINGTON APP CON 120.15 259.3 (040° - 220°) 120.75 298.9 (221° - 039°)				CLNC DEL 127,425	UNICOM 123.0 (CTAF) 0
-------------------	--	--	--	--	---------------------	---------------------------------

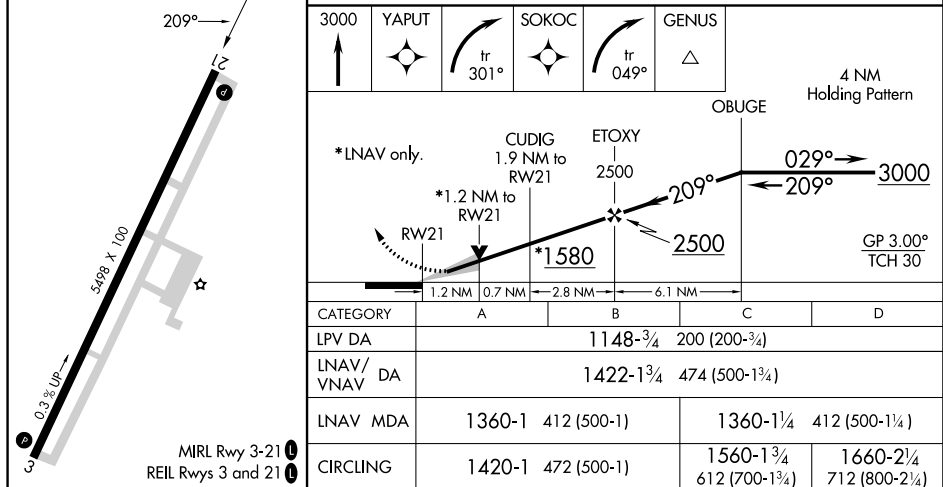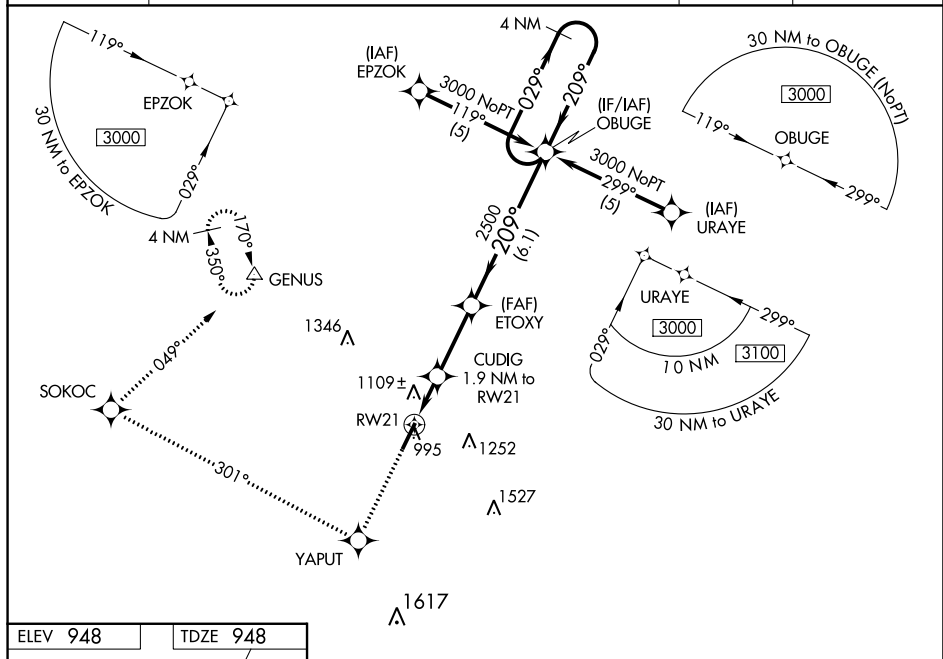

▼

▲ NA

DME required.
When local altimeter setting not received, use Lexington altimeter setting and increase all MDA 40 feet; increase Circling Cat D visibility ¼ mile.


MISSED APPROACH: Climbing left turn to 3000 direct HYK VOR/DME and hold.

AWOS-3
119.975

LEXINGTON APP CON
120.15 259.3 (040°-220°) 120.75 298.9 (221°-039°)

CINC DEL
127.425

UNICOM
123.0 (CTAF) 0

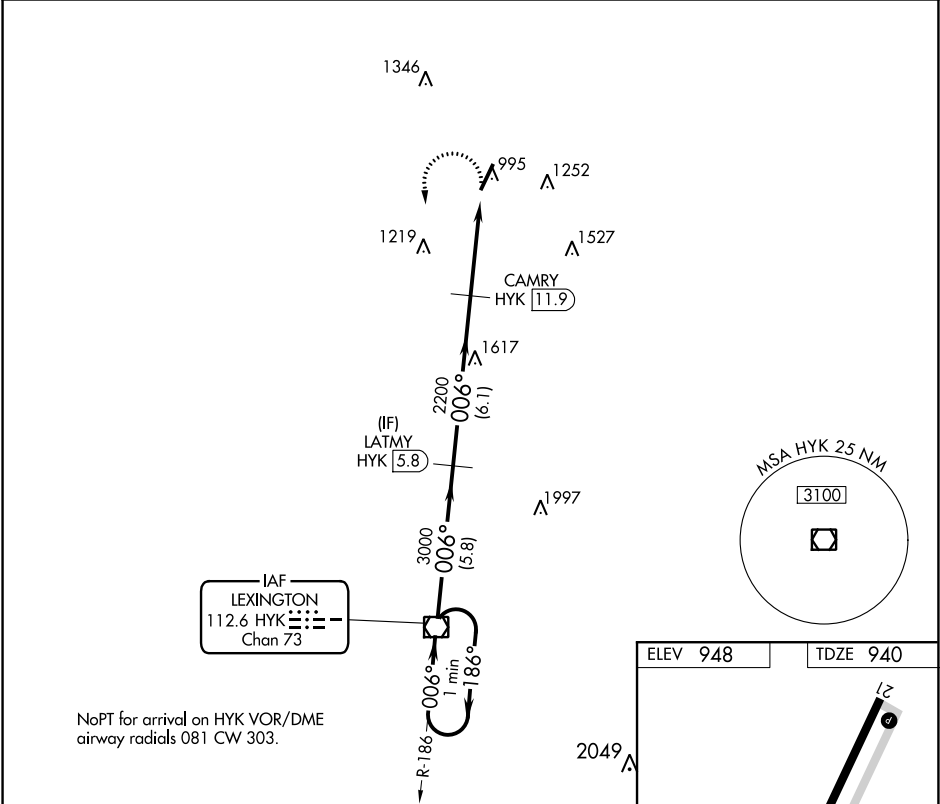

One Minute Holding Pattern

HYK VOR/DME

LATMY HYK 5.8

3000

186°

006°

3000

006°

2200

3.03°

TCH 34

3000

HYK 15.7

5.8 NM

6.1 NM

3.8 NM

CATEGORY	A	B	C	D
S-3	1480-1 540 (600-1)	1480-1½ 540 (600-1½)	1480-1¾ 540 (600-1¾)	1480-2 540 (600-2)
CIRCLING	1480-1 532 (600-1)	1560-1¾ 612 (700-1¾)	1660-2¼ 712 (800-2¼)	

ELEV 948

TDZE 940

0.3% Up

5498 x 100

MIRL Rwy 3-21 0

REIL Rwys 3 and 21 0