

WAAS CH 49019 W18A	APP CRS 184°	Rwy Idg 4986 TDZE 43 Apt Elev 44
---------------------------------	------------------------	---


RNAV (GPS) RWY 18

PERRY-FOLEY (40J)



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Baro-VNAV NA when using Tallahassee altimeter setting. When local altimeter setting not received, use Tallahassee altimeter setting and increase LPV DA to 464, LNAV/VNAV DA to 1085 and all MDA 120 feet; increase LPV visibility all Cats ¼ mile, LNAV/VNAV visibility all Cats 1 mile, and LNAV and Circling Cat C and D visibility ¼ mile.

MISSED APPROACH:
Climb to 2000 direct
OGKIP and hold.

AWOS-3PT 118.375	JACKSONVILLE CENTER 127.8 352.0	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

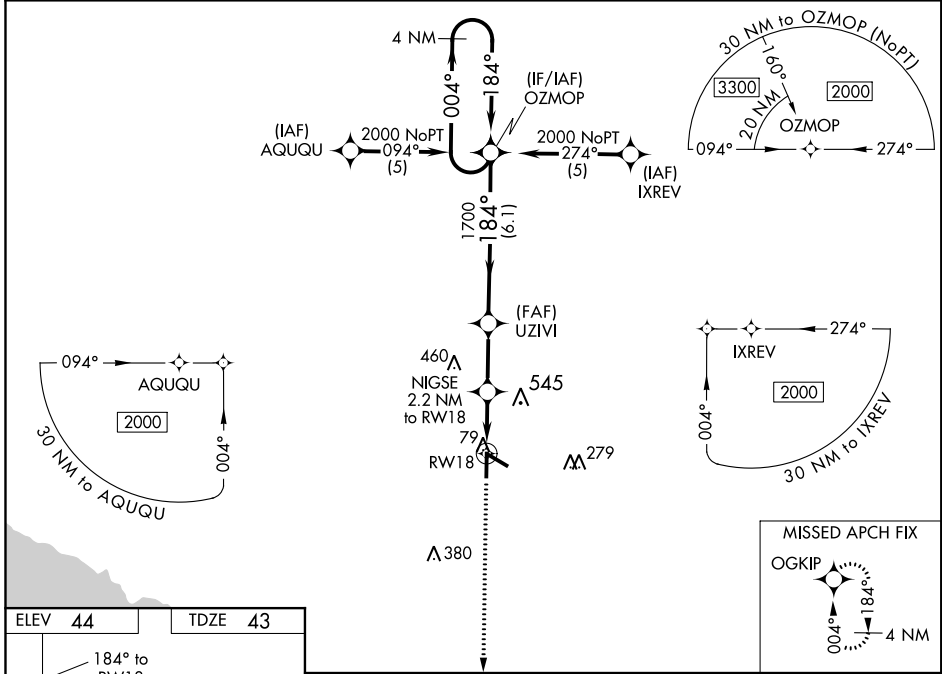

ELEV 44	TDZE 43
----------------	----------------

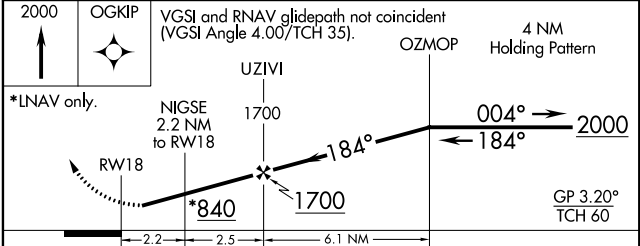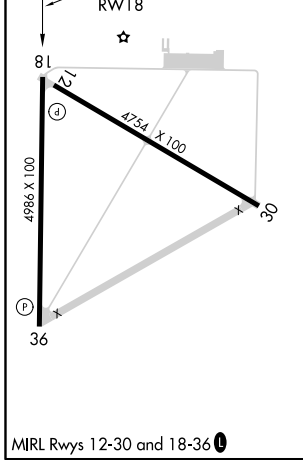

CATEGORY	A	B	C	D
LPV DA		356-1	313 (400-1)	NA
LNAV/VNAV DA		977-3	934 (1000-3)	NA
LNAV MDA	660-1	617 (700-1)	660-1 ³ / ₄ 617 (700-1 ³ / ₄)	660-2 617 (700-1)
CIRCLING	660-1	616 (700-1)	660-1 ³ / ₄ 616 (700-1 ³ / ₄)	860-2 ³ / ₄ 816 (900-2 ³ / ₄)

APP CRS	Rwy Idg	4986
004°	TDZE	42
	Apt Elev	44


RNAV (GPS) RWY 36

PERRY-FOLEY (40J)

⚠ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Tallahassee altimeter setting and increase all MDA 120 feet; increase LNAV Cat C and Circling Cat D visibility ¼ mile, and Circling Cat C visibility ½ mile.

⚠ MISSED APPROACH: Climb to 2000 direct OZMOP and hold.


AWOS-3PT 118.375	JACKSONVILLE CENTER 127.8 352.0	UNICOM 122.8 (CTAF) ⓪
----------------------------	---	--

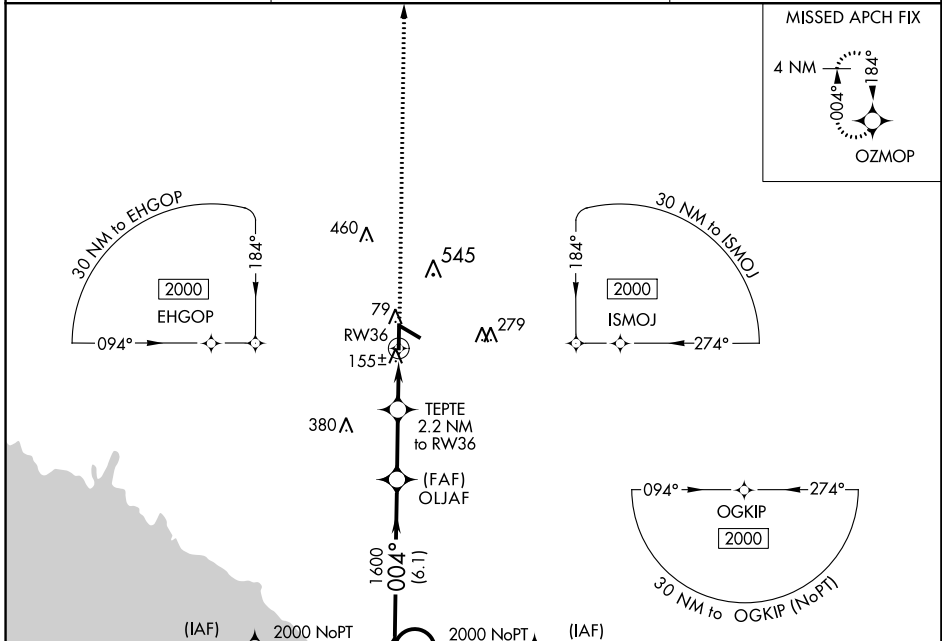

SE-3, 15 AUG 2019 to 12 SEP 2019

SE-3, 15 AUG 2019 to 12 SEP 2019

ELEV 44	TDZE 42
---------	---------

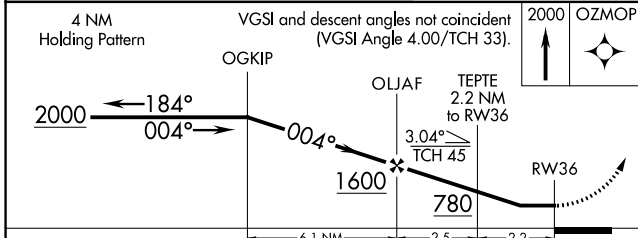

CATEGORY	A	B	C	D
LNAV MDA	460-1	418 (500-1)	460-1¼	418 (500-1¼)
CIRCLING	620-1	576 (600-1)	620-1½ 576 (600-1½)	860-2¾ 816 (900-2¾)

