

APP CRS
012°

Rwy Idg
3700

TDZE
80

Apt Elev
80

RNAV (GPS) RWY 1

LAKE CITY MUNI CJ EVANS FLD (51J)


NA

NA

DME/DME RNP-0.3 NA. Straight-in minimums NA at night.
Use Kingstree altimeter setting, when not received, use Florence altimeter setting and increase all MDAs 40 feet, increase Circling Cats B/C visibility ¼ SM. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 2000 direct INECA and hold.

CKI AWOS-3 124.775	FLORENCE APP CON ★ 135.25 316.15	CTAF 122.9 0
------------------------------	--	------------------------

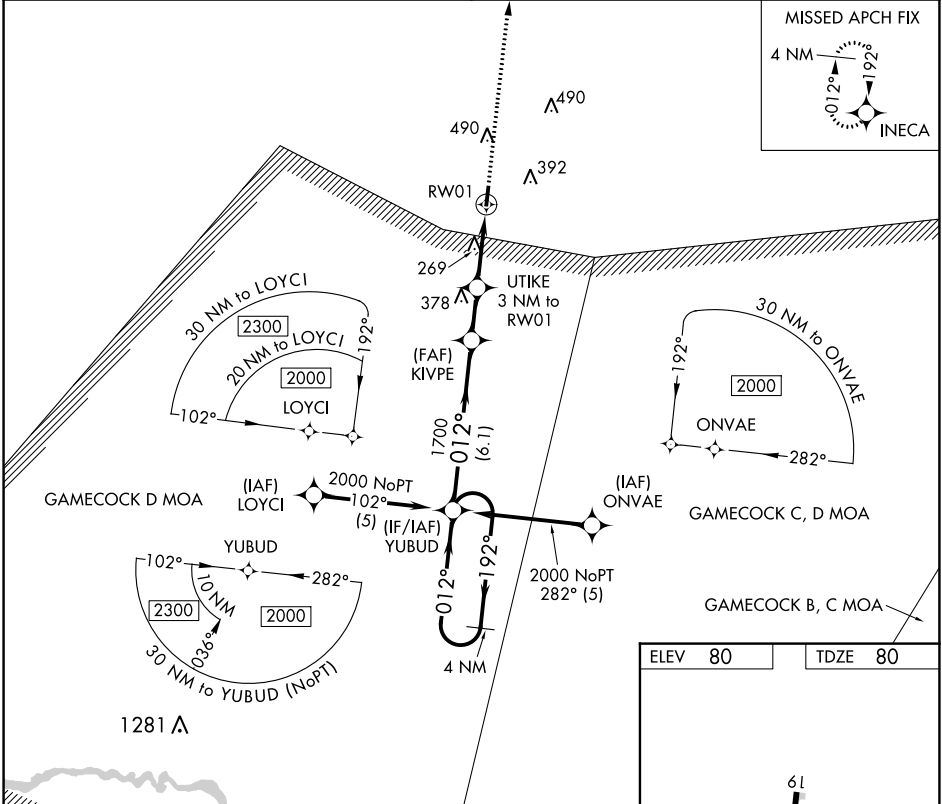

MISSED APCH FIX


4 NM

012°


192°

INECA

ELEV 80	TDZE 80
---------	---------

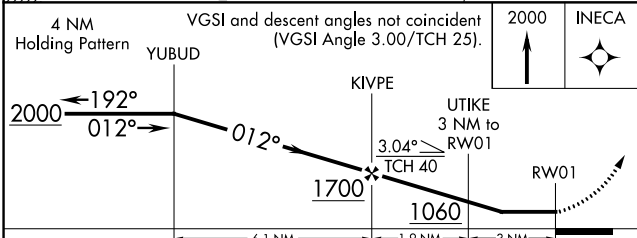

CATEGORY	A	B	C	D
LNNAV MDA	560-1	480 (500-1)	560-1¼ 480 (500-1¼)	NA
CIRCLING	660-1 580 (600-1)	880-1 800 (800-1)	880-2¼ 800 (800-2¼)	NA

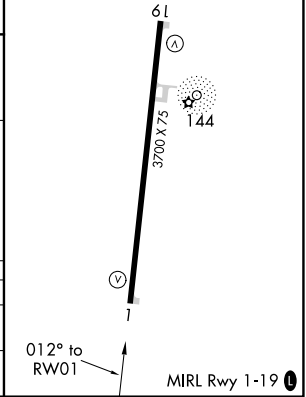

⚠

NA

Rwy 19 helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA.
Use Kingstree altimeter setting, when not received, use Florence altimeter setting and increase all MDAs 40 feet, increase LNAV Cat B visibility ¼ SM and Cat C visibility ½ SM, increase Circling Cats B/C visibility ¼ SM. Straight-in Rwy 19 NA at night.

MISSED APPROACH:
Climb to 2000 direct YUBUD and hold.

CKI AWOS-3 124.775	FLORENCE APP CON★ 135.25 316.15	CTAF 122.9
-----------------------	------------------------------------	---------------

