


| | | |
|-------------|----------|-------------|
| APP CRS | Rwy Idg | 3700 |
| 260° | TDZE | 1960 |
| | Apt Elev | 1962 |

RNAV (GPS) RWY 26


KENMARE MUNI (7K5)

| | | |
|-----------|---|---|
| RNP APCH. | Procedure NA at night. Use Minot Intl altimeter setting. | MISSED APPROACH: Climb to 4000 direct EWRAF and hold. |
|-----------|---|---|

| | | |
|----------------------------|--------------------------------------|---------------------------------|
| MOT ASOS 118.725 | MINOT APP CON* 119.6 363.8 | UNICOM 122.8 (CTAF) 0 |
|----------------------------|--------------------------------------|---------------------------------|

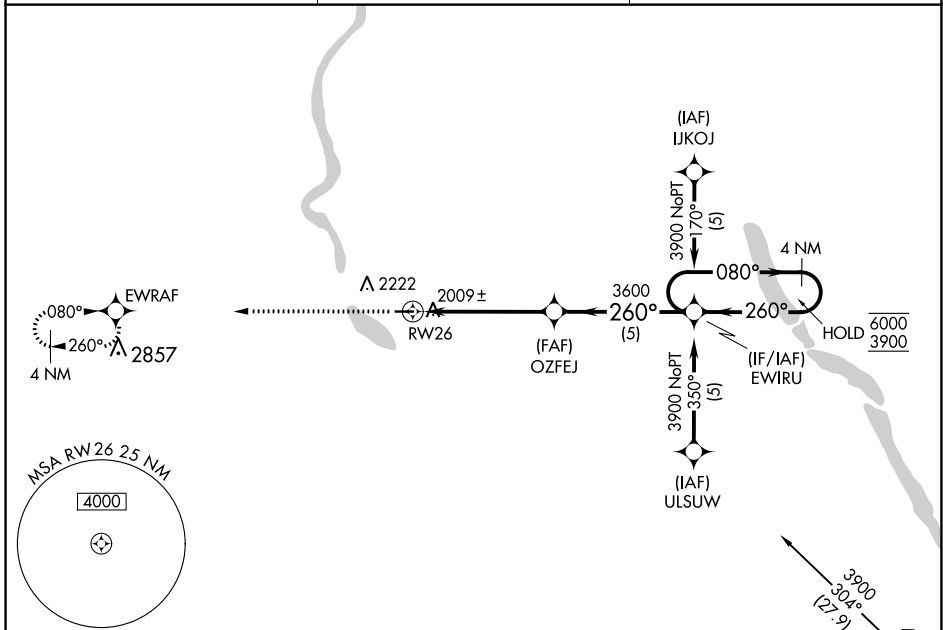

| | |
|-----------|-----------|
| ELEV 1962 | TDZE 1960 |
|-----------|-----------|

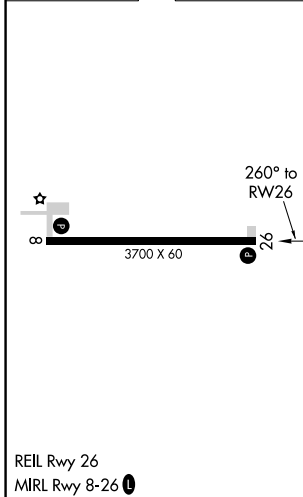

| | | | |
|-------------|-------------------------|--|----------------------|
| 4000 | EWRAF | VGSIs and descent angles not coincident (VGSIs Angle 3.00/TCH 30). | |
| ↑ | ✧ | OZFEJ | EWIRU |
| | | 3600 | 4 NM Holding Pattern |
| | | 5.1 NM | 5 NM |
| REIL Rwy 26 | MIRL Rwy 8-26 | | |
| ★ | Ⓛ | | |
| 3700 X 60 | 26° to RWY26 | 260° | 080° |
| | | 3600 | 6000 |
| | | ≤3.00° TCH 40 | 3900 |
| | | | 4 NM Holding Pattern |
| | | | |
| CATEGORY | A | B | C |
| LNAV MDA | 2420-1 | 460 (500-1) | NA |
| CIRCLING | 2660-1¼ 698 (700-1¼) | 2660-1½ 698 (700-1½) | NA |