

WAAS CH 69503 W27A	APP CRS 274°	Rwy Idg 6122 TDZE 812 Apt Elev 812
--	------------------------	---

RNAV (GPS) RWY 27
ATHENS/BEN EPPS (AHN)

RNP APCH - GPS.


A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C or above 54°C.
When local altimeter setting not received, use Winder altimeter setting; increase LPV DA to 1071 feet; increase LNAV/VNAV DA to 1121 feet; increase all MDA 60 feet and increase LNAV Cat C/D visibility to 1 mile and Circling Cat D visibility to 2¼ mile. For inop MALSF, increase LNAV/VNAV all Cats visibility to ¾ mile, increase LNAV Cat C/D visibility to 1 mile. For inop MALSF when using Winder altimeter setting increase LPV all Cats visibility to ¾ mile, increase LNAV/VNAV all Cats visibility to 1 mile, increase LNAV Cat C/D visibility to 1½ mile. Baro-VNAV and VDP NA when using Winder altimeter setting. Inop table does not apply to LPV. Circling Rwy 2, 20 NA at night.

MAISE


MISSED APPROACH:
Climb to 2500 direct
SALIN and hold.

ASOS	ATLANTA APP CON ★	ATHENS TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
132.875	132.475 291.1	126.3 (CTAF) 0 338.275	121.8	121.8	132.475 291.1 (when twr closed)	122.95

MISSED APCH FIX

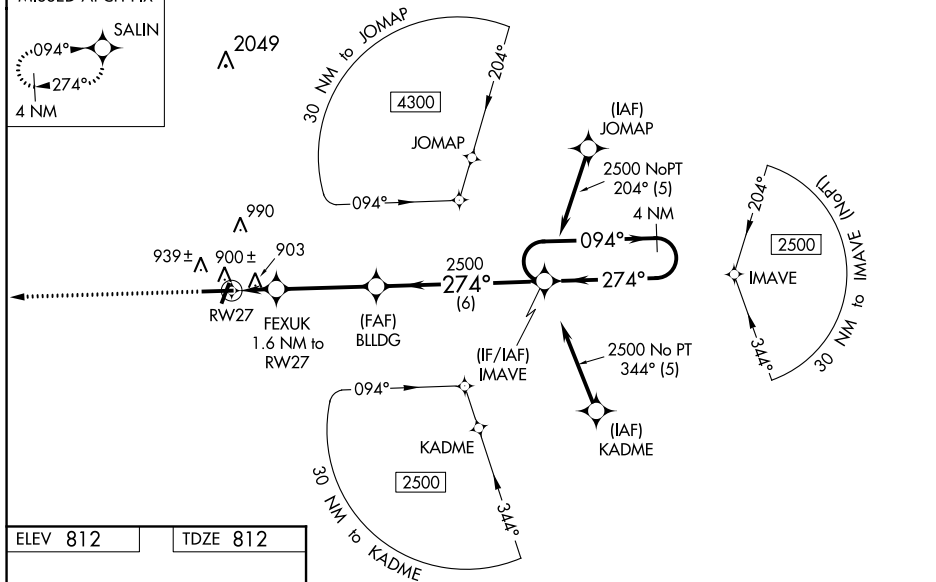

ELEV 812		TDZE 812
----------	--	----------

[illegible]

CATEGORY	A	B	C	D
LPV DA	1012- ³ / ₄ 200 (200- ³ / ₄)			
LNAV/ VNAV DA	1064- ³ / ₄ 252 (300- ³ / ₄)			
LNAV MDA	1160- ³ / ₄ 348 (400- ³ / ₄)			
 CIRCLING	1260-1 448 (500-1)	1280-1 468 (500-1)	1320-1½ 508 (600-1½)	1460-2 648 (700-2)

ATHENS, GEORGIA
Amdt 1B 07OCT21

33°57'N-83°20'W

ATHENS/BEN EPPS (AHN)
RNAV (GPS) RWY 27

SE-4, 22 FEB 2024 to 21 MAR 2024