

WAAS
CH **82501**
W17A


APP CRS
168°

Rwy Idg
TDZE **24**
Apt Elev **24**

RNAV (GPS) RWY 17

ACADIANA RGNL (ARA)

RNP APCH. ▼ Circling NA to Rwy 17W and 35W. Inop table does not apply to LPV. For inop ALS, increase LNAV/VNAV all Cats visibility to 1¼ SM and LNAV Cats C/D visibility to 1 SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C.					ODALS 	MISSED APPROACH: Climb to 480 then climbing left turn to 2000 direct CLYNT and hold.	
ASOS 133.325	LAFAYETTE APP CON ★ 121.1 268.7	ACADIANA TOWER ★ 125.0 (CTAF) 0 239.3	GND CON 121.7	CLNC DEL 121.7	CLNC DEL 118.05 (when twr closed)	UNICOM 122.95	0 ★ 122.7

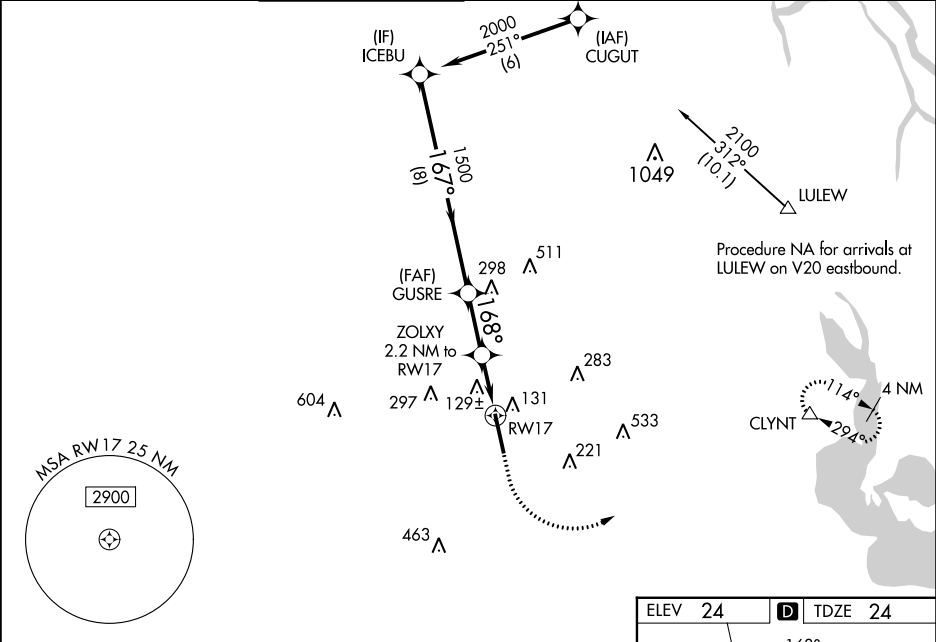

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 51).						480 	2000 	CLYNT
ICEBU 2000 167° 1500 168° *760 8 NM 2.3 NM 1.2 NM 1 NM GP 3.00° TCH 51						*LNAV only. GUSRE 1500 ZOLXY 2.2 NM to RW17 *1 NM to RW17 RW17		
CATEGORY	A		B	C	D			
LPV DA			274-¾	250 (300-¾)				
LNAV/VNAV DA			420-1½	396 (400-1½)				
LNAV MDA	380-¾ 356 (400-¾)		380-⅞ 356 (400-⅞)					
CIRCLING	440-1 416 (500-1)	480-1 456 (500-1)	600-1½ 576 (600-1½)	680-2 656 (700-2)				