

WAAS  
CH **72941**  
**W15A**

APP CRS  
**148°**

Rwy Idg  
TDZE **712**  
Apt Elev **712**

RNAV (GPS) RWY 15

AURORA MUNI (A.R.R.)

RNP APCH - GPS.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.  
Rwy 15 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 direct UQITY and hold, continue climb-in-hold to 3000.

ATIS  
**125.85**


CHICAGO APP CON  
**133.5 349.0**

AURORA TOWER★  
**120.6 (CTAF) 0**

GND CON  
**121.7**

CLNC DEL  
**121.7**  
(When tower closed)

UNICOM  
**122.95 123.5**

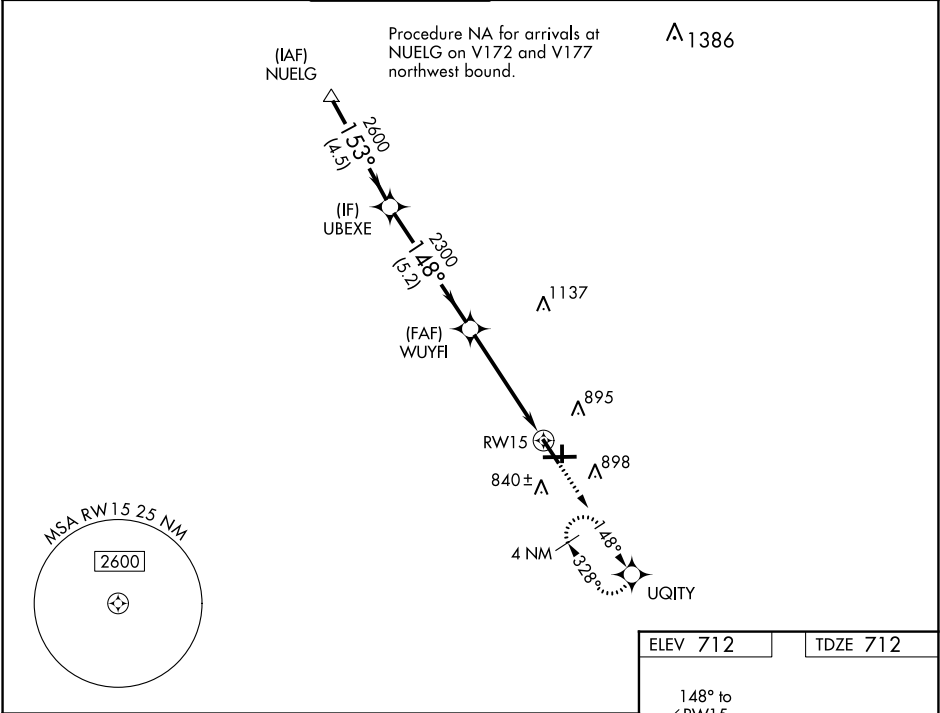

ELEV 712

TDZE 712

UBEXE

WUYFI

RW15

UQITY

3000

148° to RW15

5502 x 100

81

3198 x 75

6501

33

36

775

784

839±

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 34).

\*LNAV only.

GP 3.00°  
TCH 45

2600

2300

5.2 NM

3.3 NM

1.6 NM

| CATEGORY     | A      | B           | C                       | D                     |
|--------------|--------|-------------|-------------------------|-----------------------|
| LPV DA       |        | 962-¾       | 250 (300-¾)             |                       |
| LNAV/VNAV DA |        | 962-¾       | 250 (300-¾)             |                       |
| LNAV MDA     | 1260-1 | 548 (600-1) | 1260-1½                 | 548 (600-1½)          |
| CIRCLING     | 1260-1 | 548 (600-1) | 1300-1½<br>588 (600-1½) | 1320-2<br>608 (700-2) |

HIRL Rwy 15-33 and 9-27

MIRL Rwy 18-36

REIL Rwy 15, 18, 27, and 36