

WAAS

CH **58307**

W16A

APP CRS

161°

Rwy Idg

4002

TDZE

168

Apt Elev

168

RNAV (GPS) RWY 16


MOREHOUSE MEML (BQP)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 34°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Monroe altimeter setting and increase LPV DA to 550, LNAV/VNAV DA to 577 and all MDA 60 feet; increase LNAV Cat C visibility ¼ SM and Circling Cat C visibility ¼ SM. Baro-VNAV NA when using Monroe altimeter setting. VDP NA when using Monroe altimeter setting.

MISSED APPROACH:
Climb to 1800 direct
FEKOV and hold.

AWOS-3PT 118.375	MONROE APP CON ★ 126.9 307.9	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

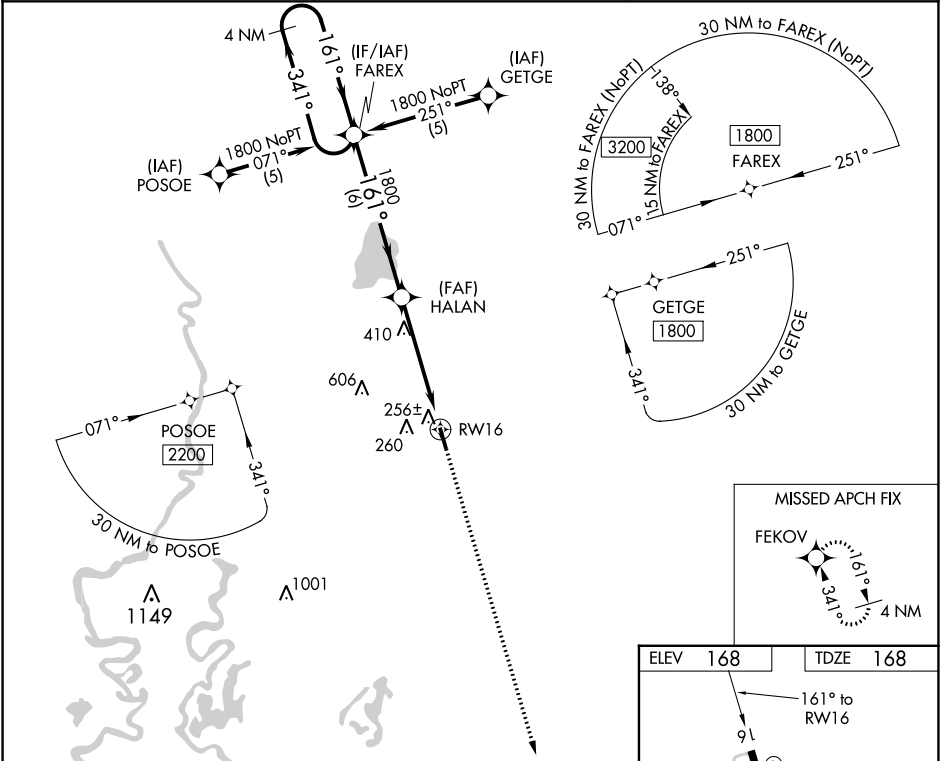

4 NM Holding Pattern		FAREX	HALAN	1800	FEKOV
1800 ← 341°		→ 161°	→ 161°	↑	✦
GP 3.00°			1800	*1.6 NM to RW16	*LNAV only.
TCH 50					
		6 NM	3.3 NM	1.6 NM	
CATEGORY	A	B	C	D	
LPV DA	499-1¼	331 (400-1¼)		NA	
LNAV/VNAV DA	526-1¼	358 (400-1¼)		NA	
LNAV MDA	720-1	552 (600-1)	720-1⅝ 552 (600-1⅝)	NA	
CIRCLING	720-1 552 (600-1)	780-1 612 (700-1)	820-1¾ 652 (700-1¾)	NA	

