
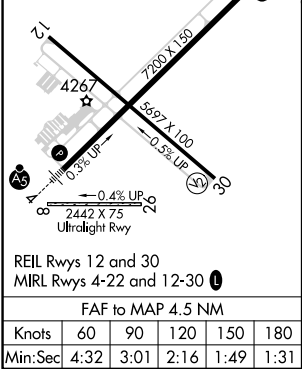


VORTAC TXO	APP CRS	Rwy Idg	7200
112.2	242°	TDZE	4214
Chan 59		Apt Elev	4216

VOR RWY 22
CLOVIS RGNL (CVN)

⚠ DME or Radar required. When local altimeter setting not received, use Cannon AFB altimeter setting and increase all MDA 40 feet; increase S-22 Cat C/D visibility ½ mile. VDP NA when using Cannon AFB altimeter setting.	MISSED APPROACH: Climb to 4700 then climbing right turn to 6000 direct TXO VORTAC and hold.
---	---

AWOS-3PT 135,375	CANNON APP CON 118,425 352.1	CLNC DEL 119.0	UNICOM 122.8 (CTAF) 📻
---------------------	---------------------------------	-------------------	---------------------------------

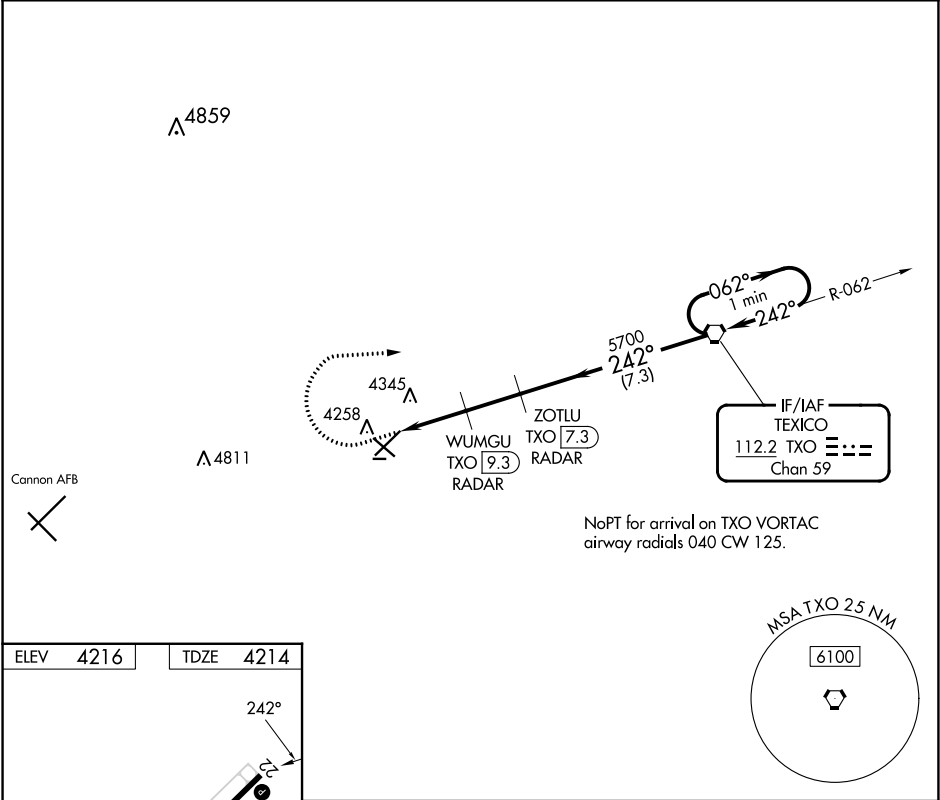

4700	6000	TXO	One Minute Holding Pattern			
WUMGU TXO 9.3 RADAR		ZOTLU TXO 7.3 RADAR	TXO VORTAC			
TXO 11.8		TXO 10.8	242° 062° 6000			
5040		5700	242°			
1		1.5	2			
CATEGORY		A	B	C	D	
S-22		4600-1	386 (400-1)	4600-1½	386 (400-1½)	
📻 CIRCLING		4680-1	464 (500-1)	4700-1½	4820-2	
				484 (500-1½)	604 (700-2)	

SW-1, 22 FEB 2024 to 21 MAR 2024

SW-1, 22 FEB 2024 to 21 MAR 2024