

WAAS CH 40033 W08A	APP CRS 084°	Rwy Idg 5004 TDZE 170 Apt Elev 176
--	------------------------	---


RNAV (GPS) RWY 8

CAMILLA-MITCHELL COUNTY (CXU)

T Baro-VNAV NA when using Albany altimeter setting. For uncompensated Baro-VNAV systems, **A** NA LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Albany altimeter setting and increase LPV DA to 513 feet; increase LNAV/VNAV DA to 623 feet; increase all MDAs 60 feet and LNAV Cats C/D and Circling Cat D visibility ¼ SM.

MISSED APPROACH:
Climb to 2400 direct
CEVOR and hold.

AWOS-3T 118.675	JACKSONVILLE CENTER 125.75 363.075	UNICOM 122.8 (CTAF) ①
---------------------------	--	---------------------------------

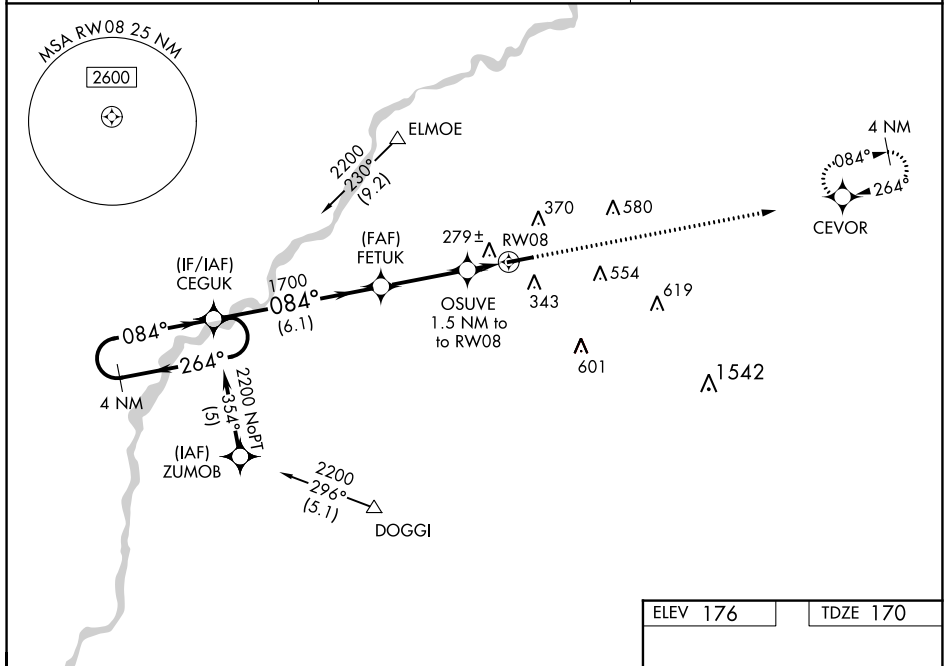

4 NM Holding Pattern

VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 39).

2400 CEVOR

*LNAV only.

2200 ← 264° / 084° →

CEGUK

084°

FETUK 1700

OSUVE 1.5 NM to RW08

*680

RW08

GP 3.00° TCH 52

6.1 NM

3.2 NM

1.5

CATEGORY	A	B	C	D
LPV DA	465-1	295 (300-1)		
LNAV/VNAV DA	575-1 $\frac{3}{8}$	405 (400-1 $\frac{3}{8}$)		
LNAV MDA	540-1	370 (400-1)		
CIRCLING	720-1 544 (600-1)	760-1 584 (600-1)	920-2 $\frac{1}{4}$ 744 (800-2 $\frac{1}{4}$)	940-2 $\frac{1}{2}$ 764 (800-2 $\frac{1}{2}$)

