
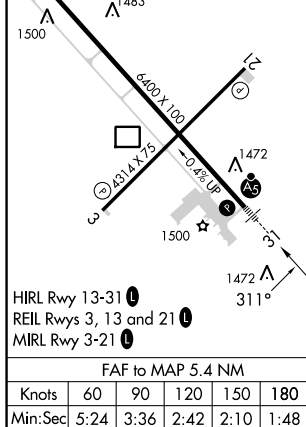


LOC I-VKE <u>108.7</u>	APP CRS 311°	Rwy Idg 6400 TDZE 1450 Apt Elev 1469
----------------------------------	------------------------	---

ILS or LOC RWY 31
DEVILS LAKE RGNL (DVL)

RNP APCH - GPS.		MALSR 	MISSED APPROACH: Climb to 3400 direct KRAMR and hold.
DME or RADAR required.			
T VDP NA when using Cando altimeter setting. When local altimeter setting not received, use Cando altimeter setting and increase S-ILS 31 DA to 1711 feet; increase all MDAs 80 feet and S-LOC 31 visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM. DME from DVL DME. DME use requires simultaneous reception of I-VKE and DVL DME. For inop ALS when using Cando altimeter setting, increase S-ILS 31 all Cats visibility to ¾ SM. For inop ALS, increase S-LOC 31 Cat C/D visibility to 1¾ SM.			
AWOS-3PT 125.875		MINNEAPOLIS CENTER 124.2 270.3	UNICOM 122.8 (CTAF) ①

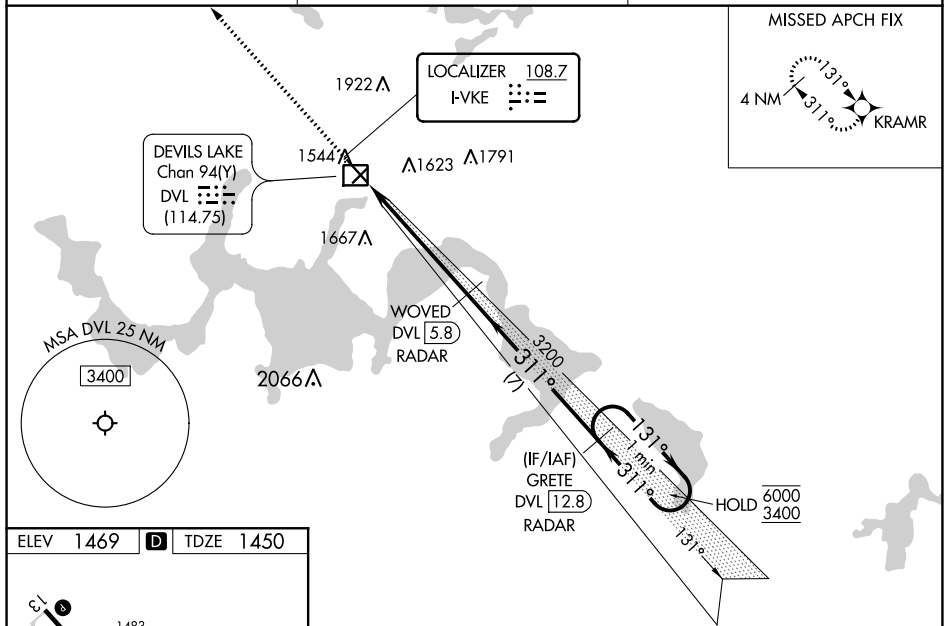

3400 ↑	KRAMR ✱	WOVED DVL 5.8 RADAR GRETE DVL 12.8 RADAR One Minute Holding Pattern 131° → 6000 ← 311° 3400 GS 3.00° TCH 44 3200 311° 3200 DVL 1.8 DVL 0.5 1.4 NM 4 NM 7 NM			
CATEGORY	A	B	C	D	
S-ILS 31	1650-½		200 (200-½)		
S-LOC 31	1920-½ 470 (500-½)		1920-1 470 (500-1)		
C CIRCLING	2000-1 531 (600-1)		2240-2¼ 771 (800-2¼)	2240-2½ 771 (800-2½)	