

WAAS
CH **70504**
W36A

APP CRS
356°

Rwy Idg
TDZE **1277**
Apt Elev **1277**

RNAV (GPS) RWY 36
WELLINGTON MUNI (E/GT)

RNP APCH.

▼

▲NA




Baro-VNAV and VDP NA when using Wichita Dwight D Eisenhower Ntl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Wichita Dwight D Eisenhower Ntl altimeter setting: increase LPV DA to 1581 feet; increase LNAV/VNAV DA to 1668 feet and all visibilities ½ SM; increase all MDA 60 feet and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH:
Climb to 3000 direct TANUC and hold.

AWOS-3P
118.875

WICHITA APP CON
134.85

UNICOM
122.8 (CTAF) 0

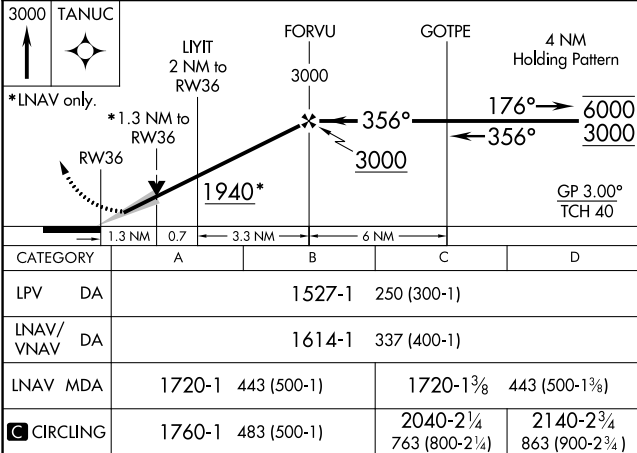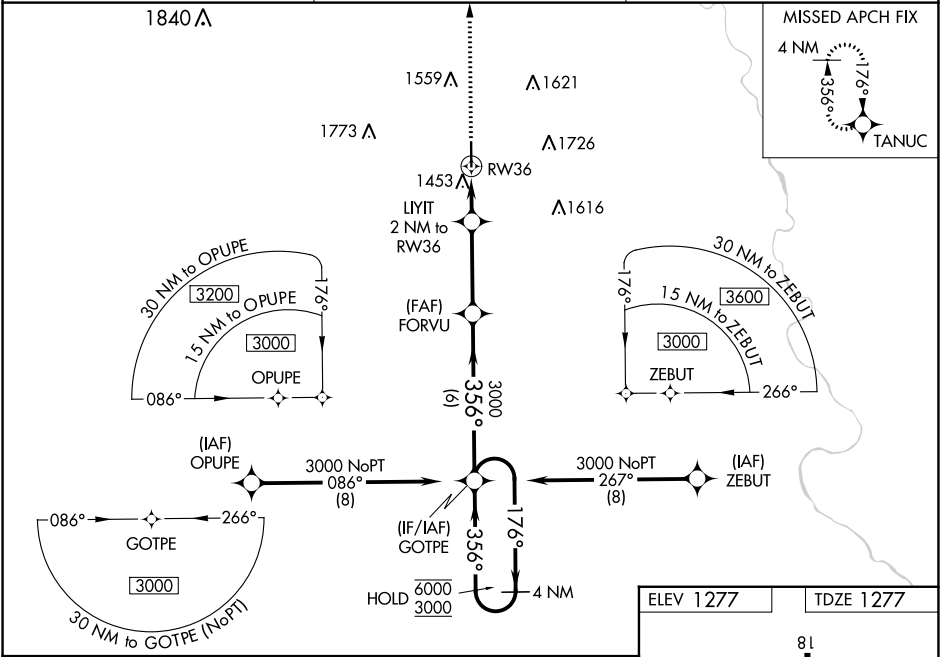

CATEGORY	A	B	C	D
LPV DA	1527-1		250 (300-1)	
LNAV/VNAV DA	1614-1		337 (400-1)	
LNAV MDA	1720-1	443 (500-1)	1720-1¾	443 (500-1¾)
CIRCLING	1760-1	483 (500-1)	2040-2¼ 763 (800-2¼)	2140-2¾ 863 (900-2¾)

