

LOC/DME I-EZA <b>108.7</b> Chan <b>24</b>	APP CRS <b>039°</b>	Rwy Idg TDZE Apt Elev	4R <b>8810</b>	4L <b>8460</b>
---	------------------------	-----------------------------	-------------------	-------------------

# ILS or LOC RWY 4R




NEWARK LIBERTY INTL (EWR)

RNP APCH - GPS. RADAR required.

When Circling to Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For inop ALS, increase Sidestep 4L Cat C visibility to 1½ SM.

MISSED APPROACH: (Do not exceed 210K until NEBTE) Climb to 560 then climbing right turn to 2000 direct TYNIE and left turn on track 015° to NEBTE, cross NEBTE at or below 2000 then climbing left turn to 3000 on track 313° to FLYRS and hold, continue climb-in-hold to 3000.

D-ATIS <b>115.7 134.825</b>	NEW YORK APP CON <b>128.55 379.9</b>	NEWARK TOWER <b>118.3 257.6</b>	GND CON <b>121.8</b>	CLINC DEL <b>118.85</b>	CPDLC
--------------------------------	---	------------------------------------	-------------------------	----------------------------	-------

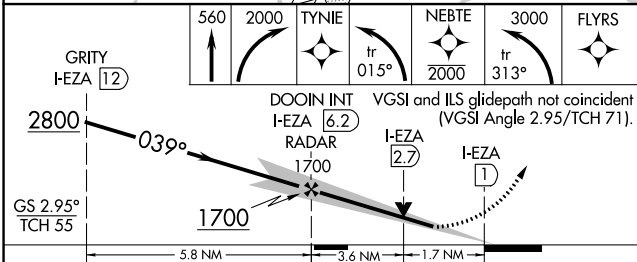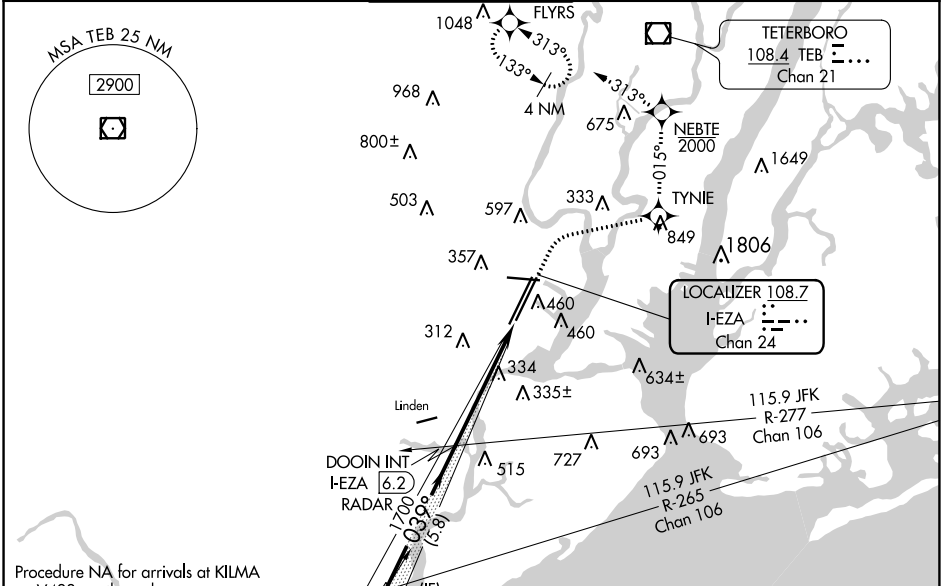

ELEV 17	TDZE 4R 11
	TDZE 4L 10

HIRL All Rws  
REIL Rws 11, 22R and 29  
TDZ/CL All Rws

FAF to MAP 5.2 NM					
Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

CATEGORY	A	B	C	D
S-ILS 4R	211/18 200 (200-½)			
S-LOC 4R	600/24	589 (600-½)	600-1¼	589 (600-1¼)
SIDESTEP RWY 4L	600/55	590 (600-1)	600-1¼ 590 (600-1¼)	600-1½ 590 (600-1½)
CIRCLING	760-1	743 (800-1)	900-2¾ 883 (900-2¾)	900-3 883 (900-3)

NE-2, 22 FEB 2024 to 21 MAR 2024

NE-2, 22 FEB 2024 to 21 MAR 2024