


WAAS CH 61310 W27A	APP CRS 273°	Rwy Idg TDZE 139 Apt Elev 147	6502
--	------------------------	---	-------------

RNAV (GPS) RWY 27


FLORENCE RGNL (FLO)

RNP APCH - GPS.		MISSED APPROACH: Climb to 2200 direct IMOVE and hold, continue climb-in-hold to 2200.
▼ ▲ Circling Rwy 1, 19 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C.		

ATIS 123.625	FLORENCE APP CON★ 118.6 341.7 (256°-074°) 135.25 316.15 (075°-255°)	FLORENCE TOWER★ 125.1 (CTAF) 353.85	GND CON 121.9 353.85	CLNC DEL 121.9 353.85	UNICOM 122.95
------------------------	---	--	--------------------------------	---------------------------------	-------------------------

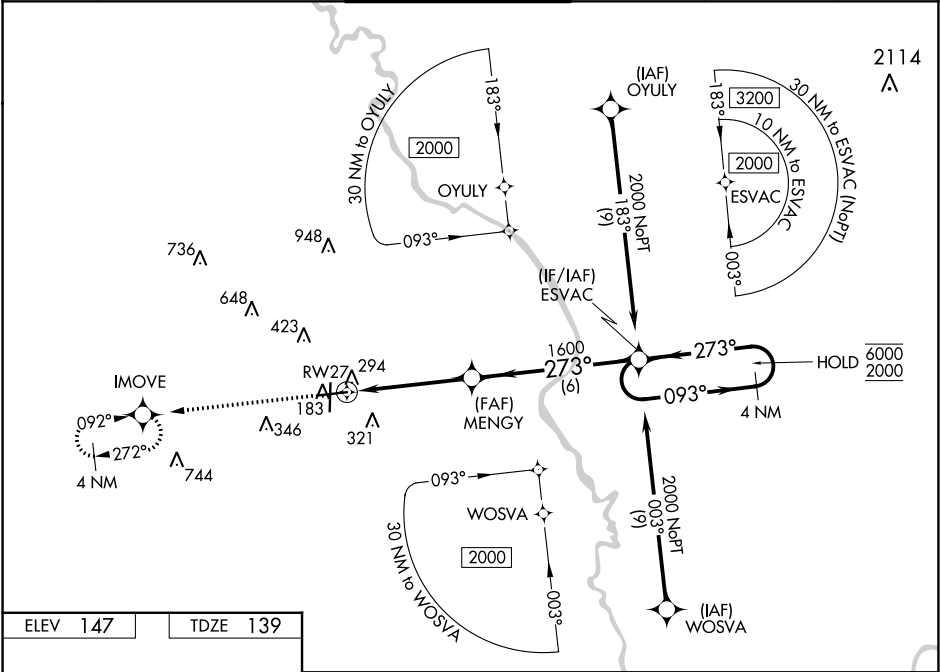

ELEV 147	TDZE 139
-----------------	-----------------



2200

↑

IMOVE

✳

ESVAC

4 NM
Holding Pattern

MENGY

1600

1.2 NM
to RW27

1600

273°

093° →

← 273°

6000

2000

RW27

1.2 NM

3.3 NM

6 NM

GP 3.00°

TCH 46

CATEGORY	A	B	C	D
LPV DA	389-1		250 (300-1)	
LNAV/VNAV DA	465-1		326 (400-1)	
LNAV MDA	560-1	421 (500-1)	560-1¼	421 (500-1¼)
CIRCLING	640-1 493 (500-1)	660-1 513 (600-1)	900-2¼ 753 (800-2¼)	900-2½ 753 (800-2½)