


WAAS CH 99615 W12A	APP CRS 125°	Rwy Idg TDZE 1128 Apt Elev 1156
--	------------------------	---

RNAV (GPS) RWY 12
FORT DODGE RGNL (FOD)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Visibility reduction by helicopters NA. When local altimeter setting not received, use Webster City altimeter setting: increase LPV DA to 1447 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1495 feet; increase all MDAs 60 feet and Circling Cat C visibility ¼ SM. VDP and Baro-VNAV NA when using Webster City altimeter setting.	MISSED APPROACH: Climb to 3400 direct KINPE and hold.
---	---

AWOS-3PT 118.775	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------------

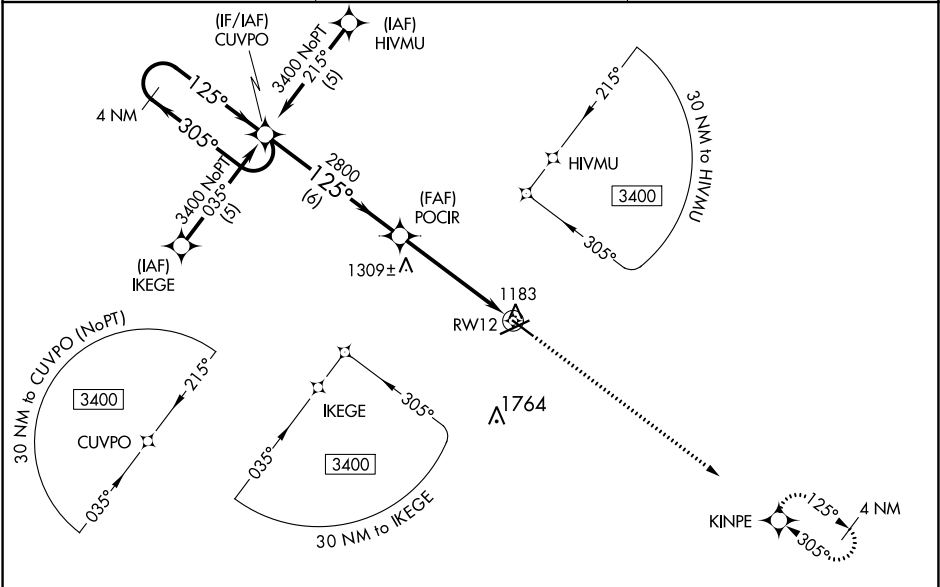

ELEV 1156 D TDZE 1128	
CATEGORY	A B C D
LPV DA	1405-1 277 (300-1)
LNAV/VNAV DA	1453-1¼ 325 (300-1¼)
LNAV MDA	1560-1 432 (500-1) 1560-1¼ 432 (500-1¼) 1560-1½ 432 (500-1½)
CIRCLING	1560-1 404 (500-1) 1620-1 464 (500-1) 1740-1½ 584 (600-1½) 2080-3 924 (1000-3)
MIRL Rwy 12-30 0 HIRL Rwy 6-24 0 REIL Rwy 12, 24 and 30 0	

NC-3, 22 FEB 2024 to 21 MAR 2024

NC-3, 22 FEB 2024 to 21 MAR 2024