

LOC I-GLR 111.1	APP CRS 096°	Rwy ldg TDZE 6579 1321 Apt Elev 1328
---------------------------	------------------------	--




ILS or LOC RWY 9
GAYLORD RGNL (GLR)

NA When local altimeter setting not received, use Grayling altimeter setting and increase all DA 71 feet and all MDA 80 feet; increase S-LOC 9 and Circling Cat C/D visibility ¼ mile. For inop MALSR when using Grayling altimeter setting, increase S-ILS all Cats visibility to ¾ mile. Night landing: Rwy 18,36 NA.

MALSR

MISSED APPROACH:
Climb to 3000 then left turn direct GLR VOR/DME and hold.

ASOS 118.375	MINNEAPOLIS CENTER 134.6 354.05	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

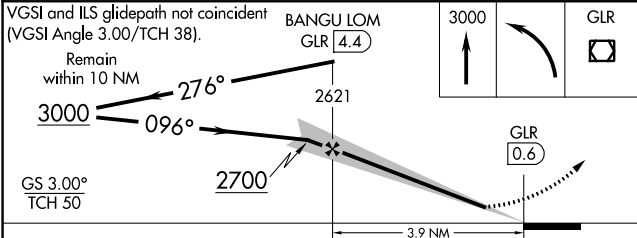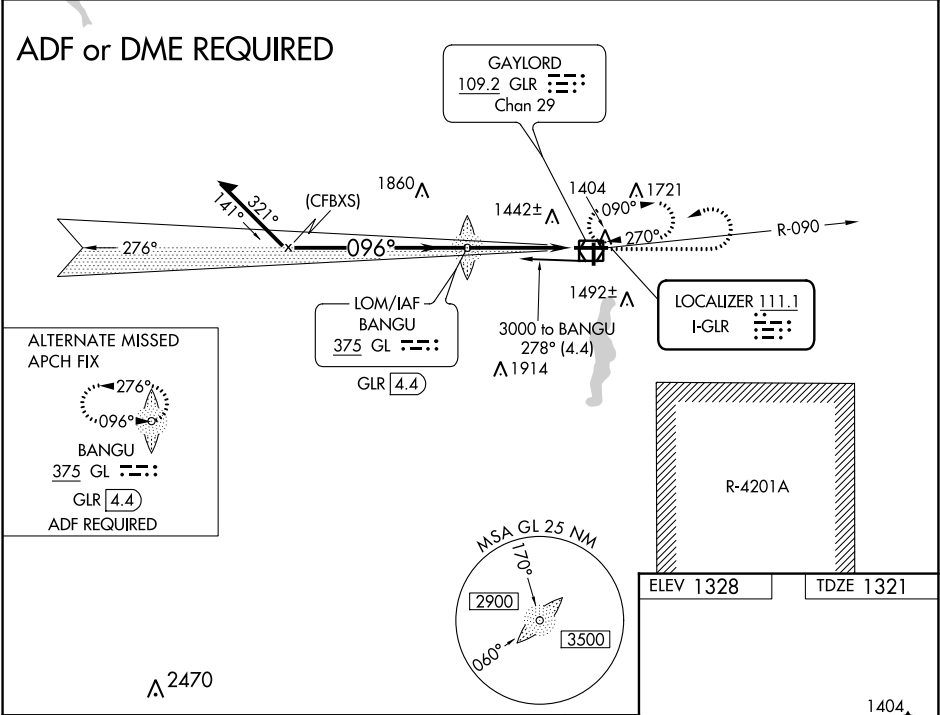

CATEGORY	A	B	C	D
S-ILS 9	1521-½ 200 (200-½)			
S-LOC 9	1860-½	539 (600-½)	1860-1	539 (600-1)
CIRCLING	1860-1 532 (600-1)	1940-1 612 (700-1)	2040-2 712 (800-2)	2080-2½ 752 (800-2½)

REIL Rwy 27, 18 and 36 0				
MIRL Rwy 18-36 0				
HIRL Rwy 9-27 0				
FAF to MAP 3.9 NM				
Knots	60	90	120	150 180
Min:Sec	3:54	2:36	1:57	1:34 1:18

EC-1, 22 FEB 2024 to 21 MAR 2024

EC-1, 22 FEB 2024 to 21 MAR 2024