


24025

RNAV (GPS) RWY 8
SAN MARCOS RGNL (HYT)


▼ Circling NA for Cat E SW of Rwy 13-31. Rwy 8 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. VDP NA with New Braunfels altimeter setting. When local altimeter setting not received, use New Braunfels altimeter setting and increase LPV DA to 882, LNAV/VNAV DA to 953 and increase all MDA 60 feet; increase LNAV Cat C/D/E and Circling Cat C/D visibility $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 3000 direct
QIMB and hold.


ATIS ★ 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER ★ 126.825 (CTAF) 0	GND CON 120.125	CLNC DEL 120.125	CLNC DEL 121.35 (when twr closed)
-------------------	--------------------------------	--	--------------------	---------------------	---

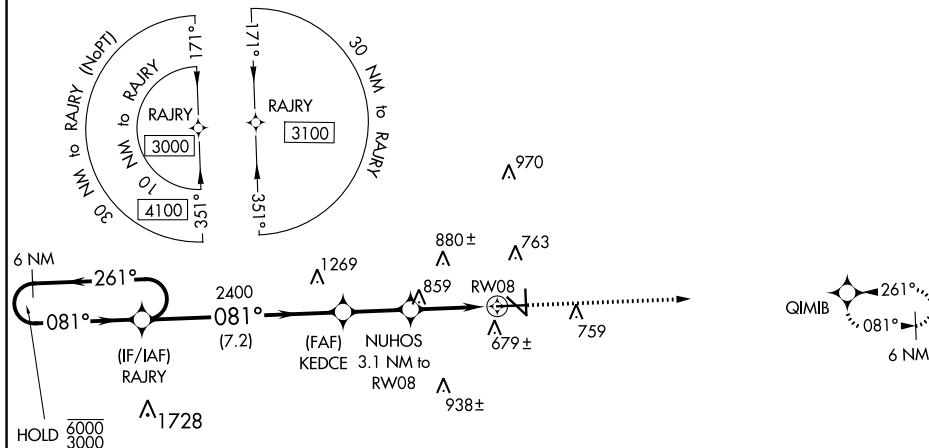

SC-3, 22 FEB 2024 to 21 MAR 2024

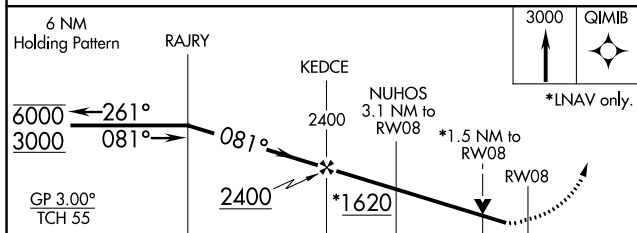

CATEGORY	A	B	C	D	E
LPV DA	839-1 250 (300-1)				
LNAV/VNAV DA	910-1 321 (400-1)				
LNAV MDA	1120-1 531 (600-1)	1120-1½ 531 (600-1½)			
C CIRCLING	1120-1 525 (600-1)	1240-1¾ 645 (700-1¾)	1320-2¼ 725 (800-2¼)	1340-2¾ 745 (800-2¾)	



SAN MARCOS RGNL (HYI)
RNAV (GPS) RWY 8