



WAAS CH 70632 W35A	APP CRS 351°	Rwy ldg TDZE 583 Apt Elev 595
--	------------------------	---

RNAV (GPS) RWY 35
SAN MARCOS RGNL (HYI)

⚠ Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility 1/8 mile; and increase LNAV Cat C/D/E visibility and Circling Cat C/D visibility 1/4. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting.

MISSED APPROACH:
Climb to 3100 direct PUKIY and hold.

ATIS ★ 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER ★ 126.825 (CTAF) 0	GND CON 120.125	CLNC DEL 120.125	CLNC DEL 121.35 (when twr closed)
--------------------------	---------------------------------------	--	---------------------------	----------------------------	--

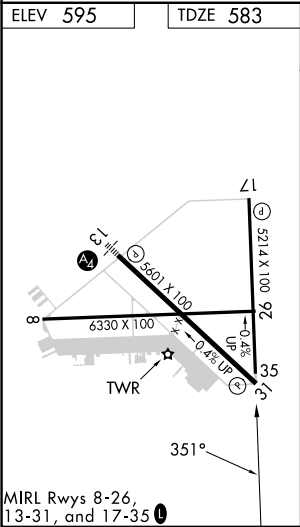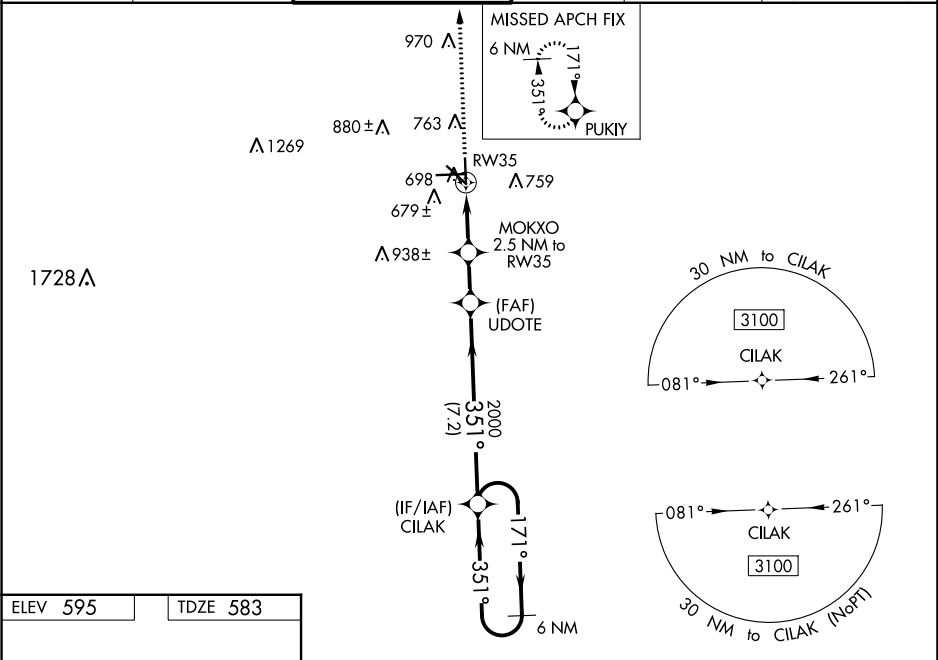

MIRL Rwy 8-26,
13-31, and 17-35

AUSTIN, TEXAS
Orig-B 23JUN16

3100 ↑ PUKIY	6 NM Holding Pattern				
*LNAV only.	MOKXO 2.5 NM to RW35	UDOTE 2000	CILAK	3100 171° → ← 351°	
	*1 NM to RW35	*1420	2000	GP 3.00° TCH 55	
	1 NM	1.5 NM	1.8 NM	7.2 NM	
CATEGORY	A	B	C	D	E
LPV DA	833-3/4 250 (300-3/4)				
LNAV/ VNAV	884-1 301 (300-1)				
LNAV MDA	960-1	377 (400-1)	960-1 1/8 377 (400-1 1/8)		
CIRCLING	1080-1 485 (500-1)	1120-1 525 (600-1)	1240-1 3/4 645 (700-1 3/4)	1320-2 1/4 725 (800-2 1/4)	1340-2 3/4 745 (800-2 3/4)