

LOC/DME I-HZR	APP CRS	Rwy Idg	5003
111.9	004°	TDZE	36
Chan 56		Apt Elev	39

LOC RWY 36


FALSE RIVER RGNL (HZR)

When local altimeter setting not received, use Baton Rouge altimeter setting and increase all MDA 60 feet; increase S-36 Cat C/D visibility to 1¾ SM and Circling Cat C to 1¾ SM.

ODALS

MISSED APPROACH: Climb to 700 then climbing right turn to 2000 direct LSU VORTAC and hold.

AWOS-3PT 121.250	BATON ROUGE APP CON★ 120.3 278.3	UNICOM 122.8 (CTAF) 0
---------------------	-------------------------------------	--------------------------

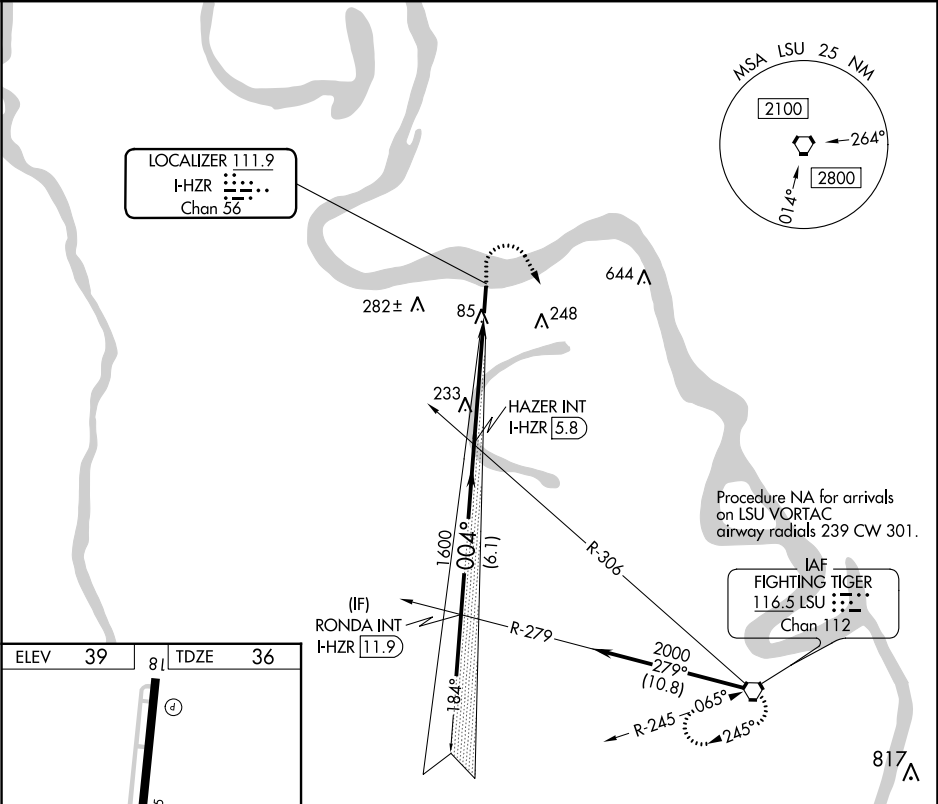

ELEV 39	81	TDZE 36
---------	----	---------

5003 x 75

004° 4.8 NM from FAF

36

MIRL Rwy 18-36

REIL Rwy 18

FAF to MAP 4.8 NM					
Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

RONDA INT I-HZR 11.9

HAZER INT I-HZR 5.8

700

2000

LSU

2000

004°

1600

3.00°

TCH 50

I-HZR 2.3

CATEGORY	A	B	C	D
S-36	500-¾ 464 (500-¾)		500-1¼ 464 (500-1¼)	
CIRCLING	500-1 461 (500-1)	520-1 481 (500-1)	600-1½ 561 (600-1½)	600-2 561 (600-2)

SC-4, 22 FEB 2024 to 21 MAR 2024

SC-4, 22 FEB 2024 to 21 MAR 2024