

WAAS CH 86628 W01A	APP CRS 009°	Rwy Idg TDZE 1014 Apt Elev 1016
--	------------------------	---

RNAV (GPS) RWY 1


ALLEN COUNTY (K88)

RNP APCH.


Rwy 1 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Baro-VNAV and VDP NA when using Chanute altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Chanute altimeter setting: increase all DA to 1296 feet; increase all MDAs 40 feet and visibility Circling Cat C $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 3000 direct TIGAY and hold.

AWOS-3 128.325	KANSAS CITY CENTER 127.725 270.25	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

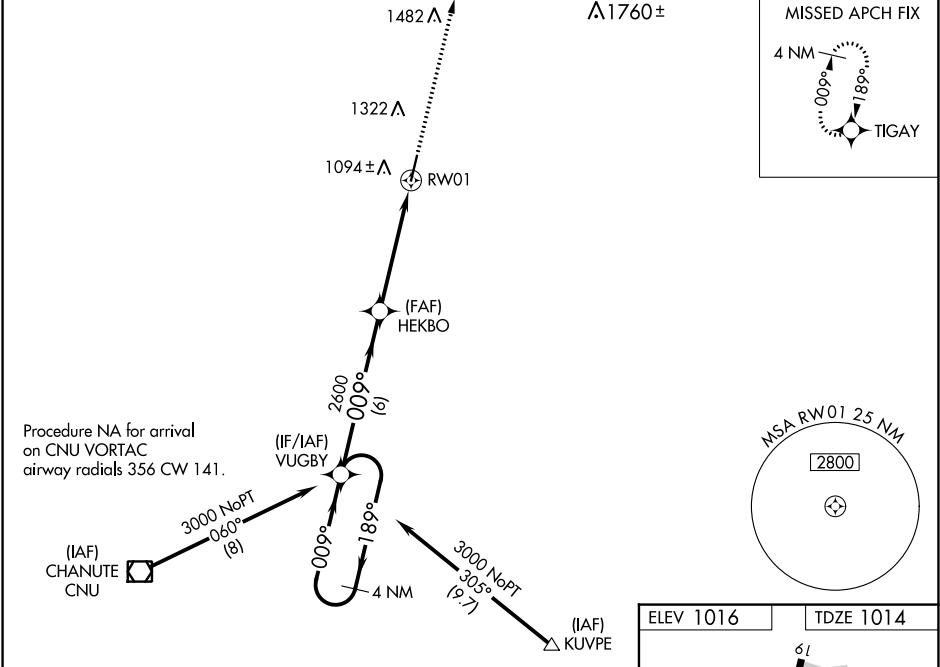

4 NM Holding Pattern		VUGBY	HEKBO	3000	TIGAY
189°		009°	009°	2600	* LNAV only
GP 3.00° TCH 55		2600	2600	1.3 NM to RW01	
6 NM		3.5 NM	1.3		
CATEGORY	A	B	C	D	
LPV DA	1264-1	250 (300-1)		NA	
LNAV/VNAV DA	1264-1	250 (300-1)		NA	
LNAV MDA	1480-1	466 (500-1)	1480-1 $\frac{3}{8}$ 466 (500-1 $\frac{3}{8}$)	NA	
CIRCLING	1520-1	504 (600-1)	1660-1 $\frac{3}{4}$ 644 (700-1 $\frac{3}{4}$)	NA	

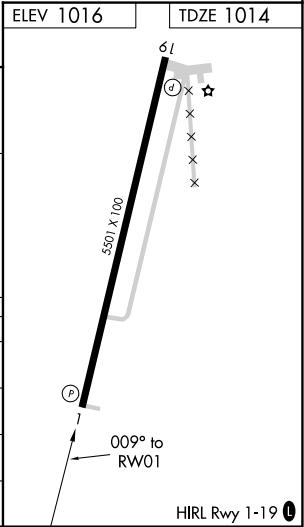

APP CRS	Rwy Idg	5501
189°	TDZE	1016
	Apt Elev	1016

RNAV (GPS) RWY 19

ALLEN COUNTY (K88)

RNP APCH: ▼ Rwy 19 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Chanute altimeter setting and increase all MDAs 40 feet and visibility Circling Cat C ¼ SM. VDP NA when using Chanute altimeter setting.	MISSED APPROACH: Climb to 3000 direct VUGBY and hold.
--	--

AWOS-3 128.325	KANSAS CITY CENTER 127.725 270.25	UNICOM 122.8 (CTAF) 0
-------------------	--------------------------------------	--------------------------

