
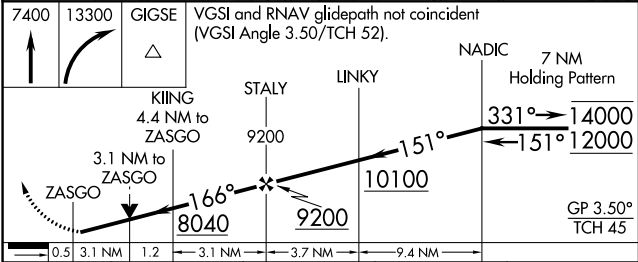


WAAS CH 69643 W16A	APP CRS 166°	Rwy Idg TDZE Apt Elev 7025 6188 6221
--	------------------------	--


RNAV (GPS) RWY 16
AFTON MUNI (AFO)

RNP APCH - GPS.	MISSED APPROACH: (Do not exceed 210K until GIGSE) Climb to 7400 then climbing right turn to 13300 direct GIGSE and hold. #Missed approach requires minimum climb of 420 feet per NM to 9000. *Missed approach requires minimum climb of 400 feet per NM to 9000.
Rwy 16 helicopter visibility reduction below ¾ SM NA. When Afton altimeter setting not received, procedure NA. -22°C	

AWOS-3P 119.025	SALT LAKE CENTER 128.35 239.25	UNICOM 122.8 (CTAF)
---------------------------	--	-------------------------------

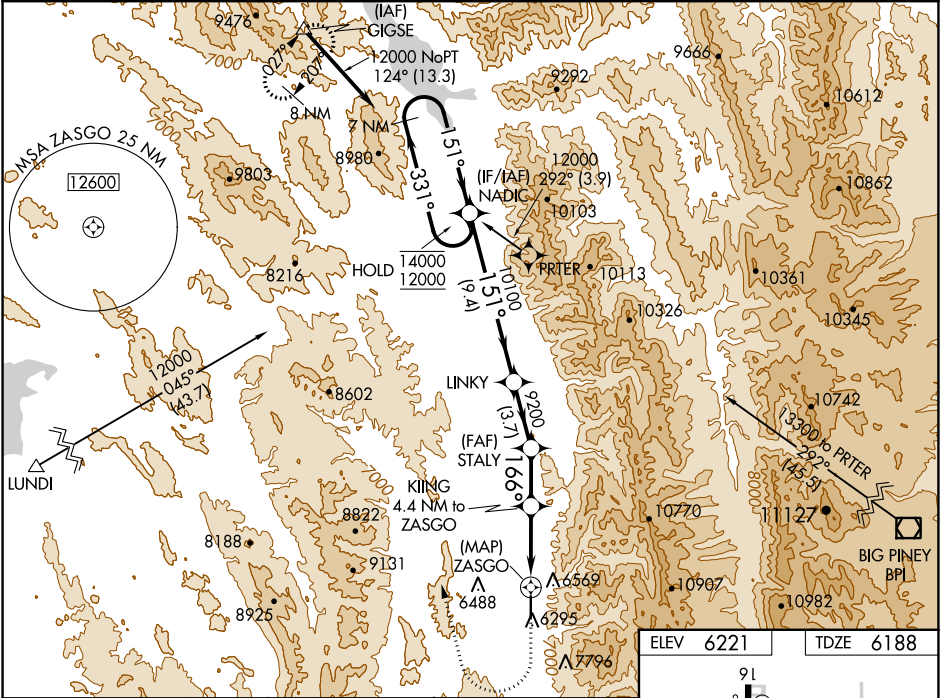

CATEGORY	A	B	C	D
LPV DA*	6485-1	297 (300-1)		NA
LPV DA	7110-2½	922 (900-2½)		NA
LNAV MDA#	7600-1¼ 1412 (1400-1¼)	7600-1½ 1412 (1400-1½)	7600-3 1412 (1400-3)	NA
LNAV MDA	7800-1¼ 1612 (1600-1¼)	7800-1½ 1612 (1600-1½)	7800-3 1612 (1600-3)	NA

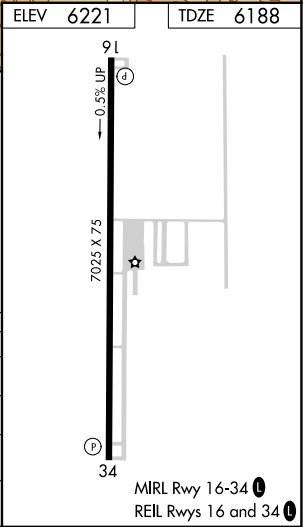

APP CRS
346°

Rwy Idg
TDZE
Apt Elev

7025
6221
6221

RNAV (GPS) RWY 34

AFTON MUNI (AFO)

RNP APCH - GPS.

▼

NA

-22°C


Circling NA east of Rwy 16-34. Procedure NA at night.

Rwy 34 helicopter visibility reduction below 1 SM NA.

When Afton altimeter setting not received, procedure NA.

MISSED APPROACH: (Do not exceed 200K until IVAYU)
Climb to 8080 then climbing left turn to 11700 direct IVAYU and hold.
*Missed approach requires minimum climb of 364 feet per NM to 8900.

AWOS-3P 119.025	SALT LAKE CENTER 128.35 239.25	UNICOM 122.8 (CTAF) ①
--------------------	-----------------------------------	--------------------------

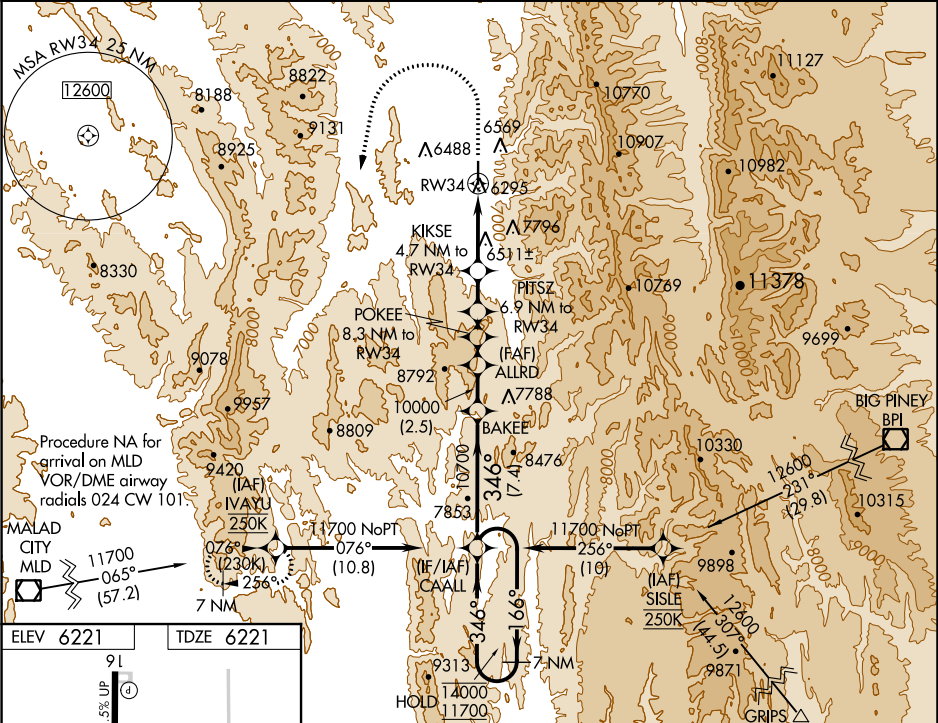

ELEV 6221 TDZE 6221

9L

7025 X 75

346°

34

MIRL Rwy 16-34 ①

REIL Rws 16 and 34 ①

VGSI and descent angles not coincident (VGSI Angle 3.50/TCH 52).

7 NM Holding Pattern

CAALL

BAKEE

ALLRD

POKEE

PITSZ

KIKSE

8080

11700

IVAYU

14000

11700

10700

10000

9420

8900

8060

166°

346°

360°

346°

346°

346°

346°

7.4 NM

2.5 NM

1.5 NM

1.4 NM

2.2 NM

4.7 NM

CATEGORY	A	B	C	D
INAV MDA*	7520-1¼ 1299 (1300-1¼)	7520-1½ 1299 (1300-1½)	7520-3 1299 (1300-3)	NA
INAV MDA	7800-1¼ 1579 (1600-1¼)	7800-1½ 1579 (1600-1½)	7800-3 1579 (1600-3)	NA
CIRCLING	7800-1¼ 1579 (1600-1¼)	7800-1½ 1579 (1600-1½)	7800-3 1579 (1600-3)	NA