

APP CRS
097°

Rwy Idg
TDZE
Apt Elev

5189
1113
1136

RNAV (GPS) RWY 10


WAYNE COUNTY (BJJ)

⚠


DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Akron-Canton Rgnl altimeter setting and increase all MDA 60 feet and visibility Circling Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 3000 direct DEHYH and hold.

ASOS 118.075	CLEVELAND APP CON ★ 125.5 371.875	CLNC DEL 121.75	UNICOM 122.975 (CTAF) 0
-----------------	--------------------------------------	--------------------	----------------------------

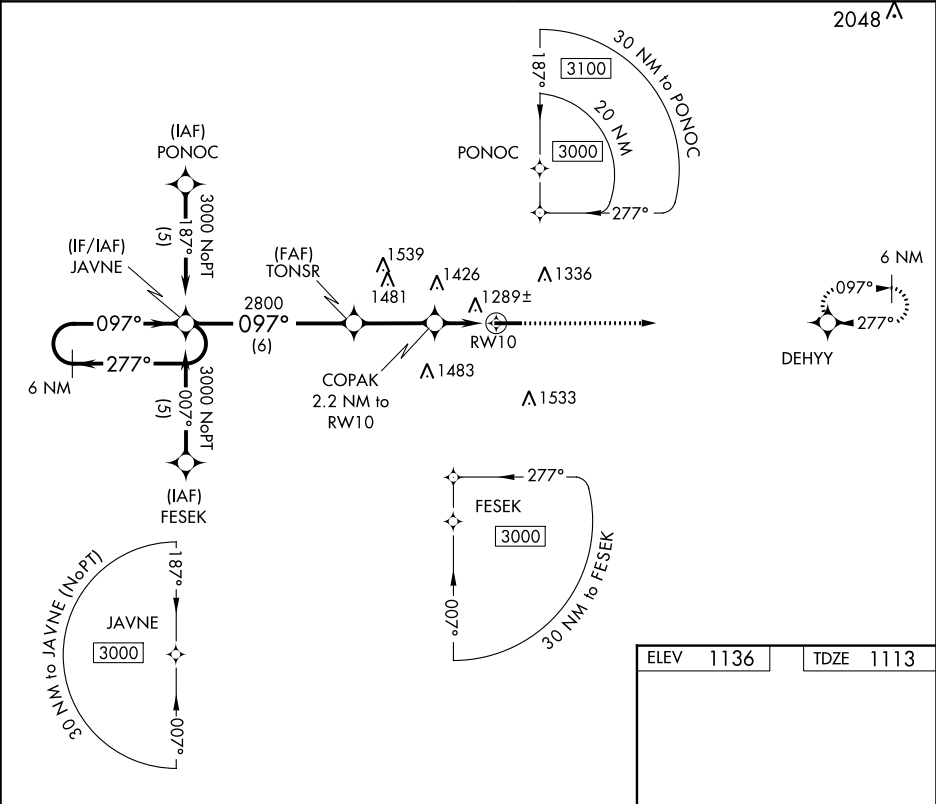

ELEV 1136	TDZE 1113
-----------	-----------

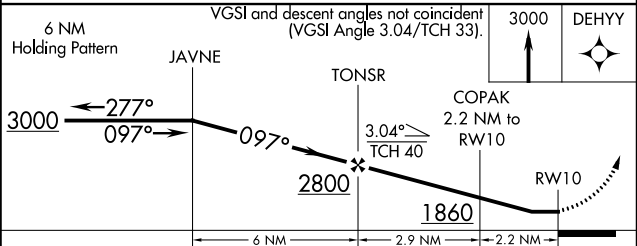

CATEGORY	A	B	C	D
LNAV MDA	1540-1	427 (500-1)	1540-1¼ 427 (500-1¼)	1540-1½ 427 (500-1½)
CIRCLING	1600-1 464 (500-1)	1700-1 564 (600-1)	1800-1¾ 664 (700-1¾)	1840-2¼ 704 (800-2¼)

REIL Rwy 10 and 28 0

HIRL Rwy 10-28 0

WAAS CH 82215 W28A	APP CRS 277°	Rwy Idg 4971 TDZE 1134 Apt Elev 1136
--	------------------------	---


RNAV (GPS) RWY 28

WAYNE COUNTY (BJJ)

⚠ Baro-VNAV NA when using Akron-Canton Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Akron-Canton Rgnl altimeter setting: increase LPV DA to 1458 feet, LNAV/VNAV DA to 1649 feet, and visibility LPV all Cats ¼ SM and LNAV/VNAV all Cats ½ SM; increase all MDA 60 feet and visibility LNAV Cat C/D ½ SM and Circling Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 3000 direct JAVNE and hold.

ASOS 118.075	CLEVELAND APP CON ★ 125.5 371.875	CLNC DEL 121.75	UNICOM 122.975 (CTAF) 0
------------------------	---	---------------------------	-----------------------------------

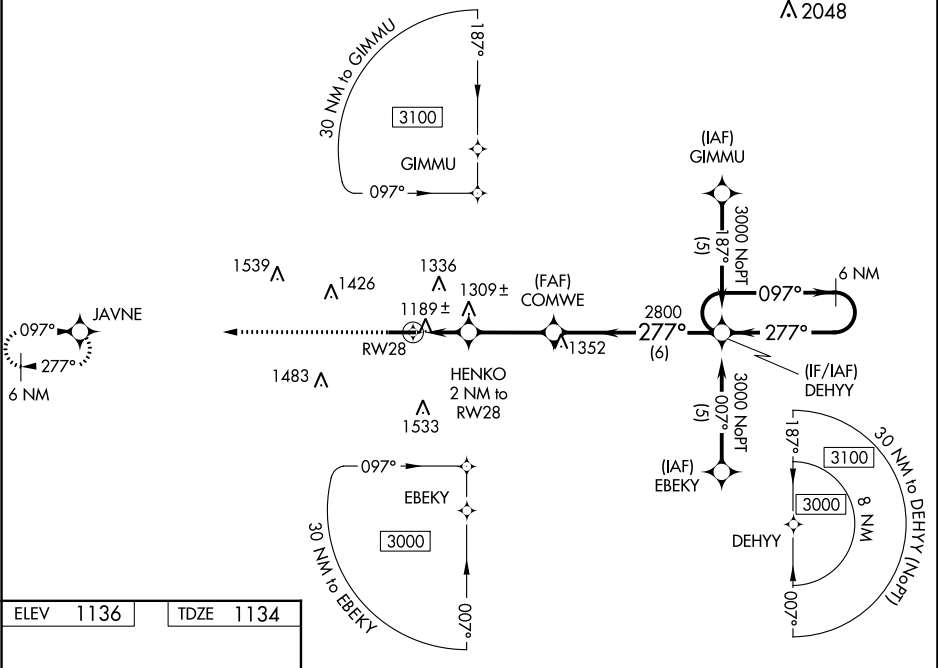

ELEV 1136	TDZE 1134
-----------	-----------

3000 **JAVNE**

↑ **✧**

***LNAV only**

HENKO 2 NM to RW28

COMWE

DEHY

6 NM Holding Pattern

277°

1800*

2800

3000

GP 3.00° TCH 35

5189 X 100

0.5% UP

2 NM

3.1 NM

6 NM

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 33).

6 NM Holding Pattern

GP 3.00° TCH 35

CATEGORY	A	B	C	D
LPV DA	1398-1 264 (300-1)			
LNAV/ VNAV DA	1589-1½ 455 (500-1½)			
LNAV MDA	1560-1 426 (500-1)		1560-1¼ 426 (500-1¼)	
CIRCLING	1600-1 464 (500-1)	1700-1 564 (600-1)	1800-1¾ 664 (700-1¾)	1840-2¼ 704 (800-2¼)

VOR/DME BSV	APP CRS	Rwy Idg	5189
114.05	115°	TDZE	1113
Chan 87(Y)		Apt Elev	1136

VOR RWY 10

WAYNE COUNTY (BJJ)

DME required.


▼

⚠


When local altimeter setting not received, use Akron-Canton Rgnl altimeter setting and increase all MDA 60 feet; increase S-10 Cat C/D and Circling Cat C/D visibility ¼ SM. Rwy 10 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2800 direct BSV VOR/DME and hold.

ASOS 118.075	CLEVELAND APP CON ★ 125.5 371.875	CLNC DEL 121.75	UNICOM 122.975 (CTAF) 0
-----------------	--------------------------------------	--------------------	----------------------------

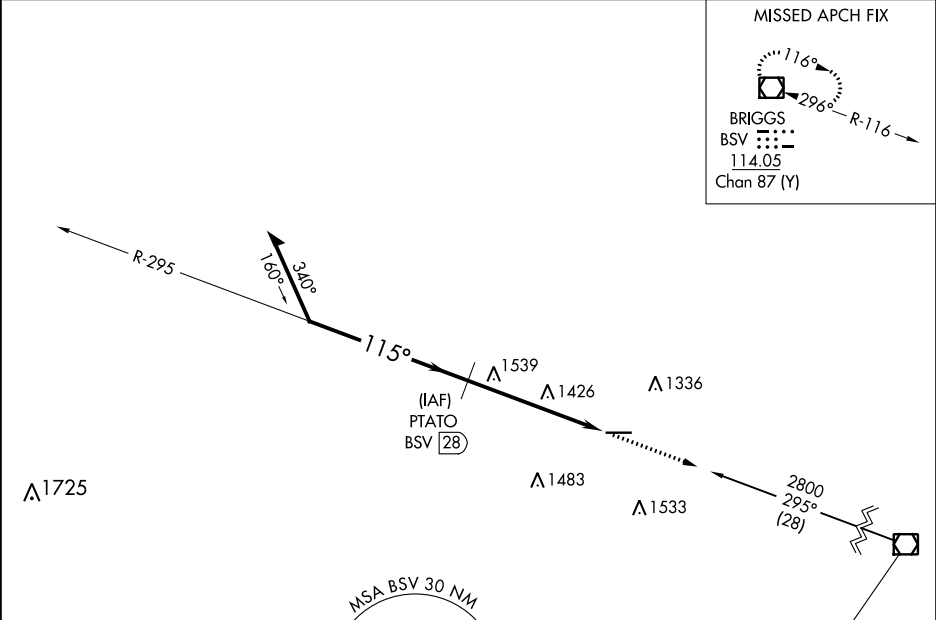

ELEV 1136	TDZE 1113
-----------	-----------



REIL Rwys 10 and 28
HIRL Rwy 10-28

FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

☒ CIRCLING

CIRCLING 1840-1 704 (800-1) | 1840-1 ¼ 704 (800-1 ¼) | 1840-2 704 (800-2) | 1840-2 ¼ 704 (800-2 ¼) |

WOOSTER, OHIO
Amdt 1D 22APR21

40°52'N-81°53'W

WAYNE COUNTY (BJJ)
VOR RWY 10



VOR/DME BSV 114.05 Chan 87 (Y)	APP CRS 296°	Rwy Idg 4971 TDZE 1134 Apt Elev 1136
--	------------------------	---

VOR RWY 28

WAYNE COUNTY (BJJ)

▼ ⚠ DME required. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Akron-Canton Rgnl altimeter setting and increase all MDA 60 feet and visibility Circling Cat C/D ¼ SM.	MISSED APPROACH: Climb to 2800 then left turn direct BSV VOR/DME and hold.
---	--

ASOS 118.075	CLEVELAND APP CON ★ 125.5 371.875	CLNC DEL 121.75	UNICOM 122.975 (CTAF) 0
------------------------	---	---------------------------	--

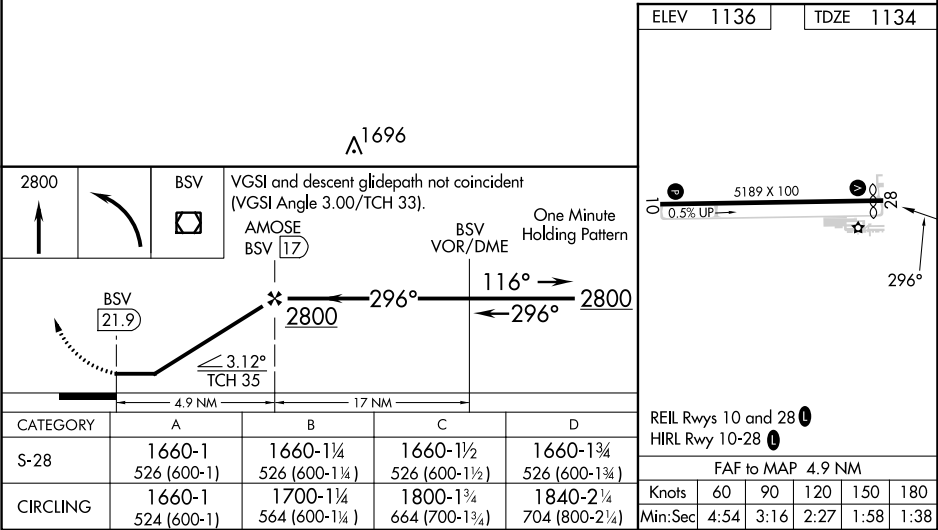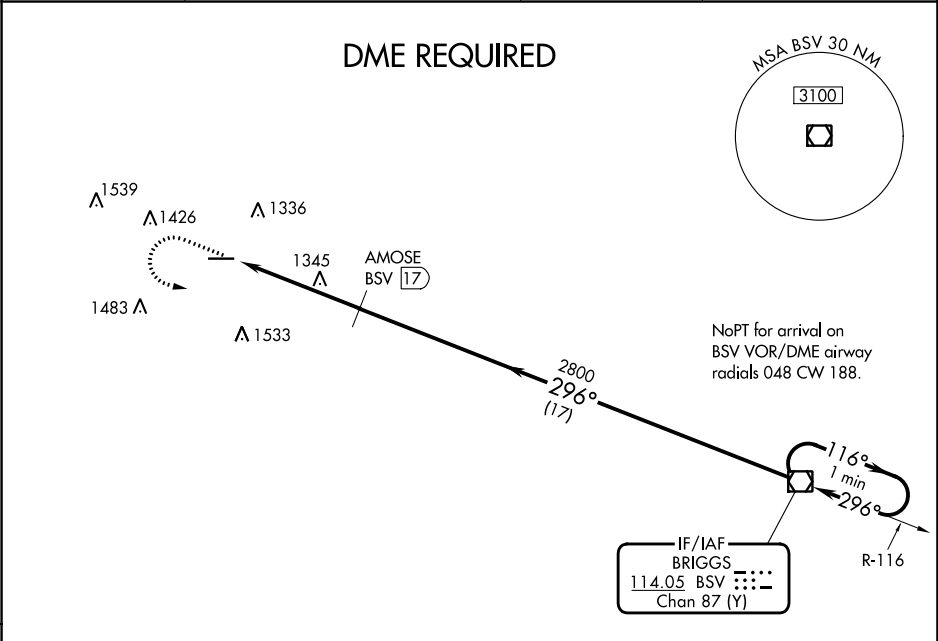

EC-2, 22 FEB 2024 to 21 MAR 2024

EC-2, 22 FEB 2024 to 21 MAR 2024