

WAAS Ch 42626 W23A	APP CRS 232°	Rwy Idg TDZE 568 Apt Elev 577
--	------------------------	---

RNAV (GPS) RWY 23

KYLE-OAKLEY FLD (CEY)

⚠

DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA with Mayfield altimeter setting. When local altimeter setting not received use Mayfield altimeter setting: increase all DA/MDA 40 feet, and increase LPV, LNAV/VNAV all Cats, and LNAV Cats C and D visibility ⅛ mile. For inop ODALS, increase LPV and LNAV/VNAV all Cats, and LNAV Cats C and D visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).

ODALS

⬆

⬆

⬆

⬆

MISSED APPROACH:

Climb to 3000 direct EKACY and hold.

AWOS-3 119.975	MEMPHIS CENTER 133.65 292.15	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

ELEV 577

TDZE 568

3000

EKACY

VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 38).

4 NM Holding Pattern

*LNAV only.

AZCUF

2100

232°

2100

GP 3.00° TCH 40

1 NM

3.7 NM

6.8 NM

CATEGORY	A	B	C	D
LPV DA		859-7⁄8	291 (300-7⁄8)	
LNAV/VNAV DA		861-7⁄8	293 (300-7⁄8)	
LNAV MDA	980-3⁄4	412 (500-3⁄4)	980-1	412 (500-1)
CIRCLING	1000-1 423 (500-1)	1040-1 463 (500-1)	1040-1½ 463 (500-1½)	1180-2 603 (700-2)

MURRAY, KENTUCKY
Amdt 1 05MAR15

36° 40'-N-88° 22'-W

KYLE-OAKLEY FLD (CEY)
RNAV (GPS) RWY 23

WAAS CH 86826 W05A	APP CRS 052°	Rwy Idg TDZE Apt Elev	6202 577 577
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 5
KYLE-OAKLEY FLD (CEY)

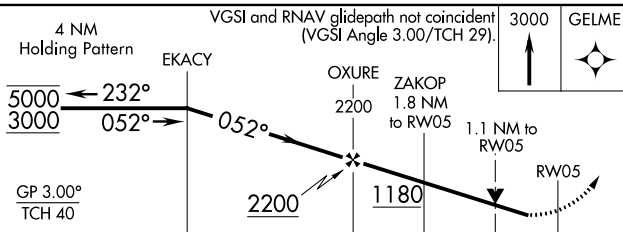
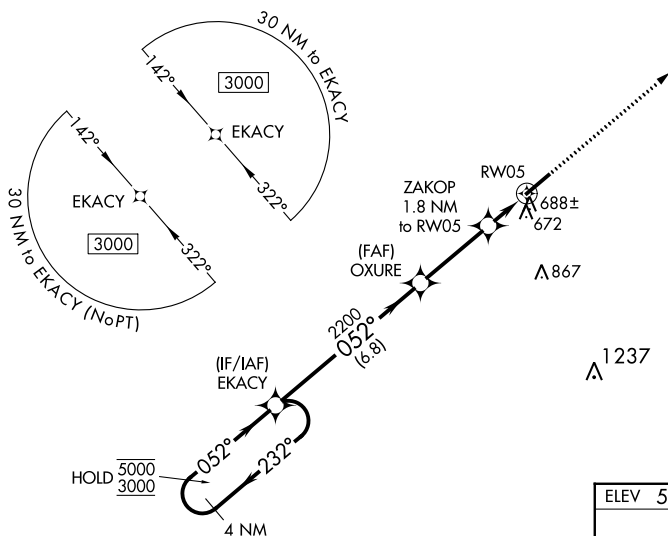
RNP APCH - GPS.

T Rwy 5 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV
A systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct GELME and hold.

AWOS-3
119.975

MEMPHIS CENTER
133.65 292.15

UNICOM
122.7 (CTAF) 

		6.8 NM		3.2 NM		0.7 NM		1.1 NM	
CATEGORY		A	B	C	D				
LPV	DA	827-3/4			250 (300-3/4)				
RNAV/ VNAV	DA	947-1			370 (400-1)				
RNAV	MDA	960-1	383 (400-1)		960-1 1/8		383 (400-1 1/8)		
 CIRCLING		1000-1 423 (500-1)	1040-1 463 (500-1)		1040-1 1/2 463 (500-1 1/2)		1180-2 603 (700-2)		

