


WAAS CH 82133 W13A	APP CRS 127°	Rwy Idg TDZE 598 Apt Elev 598	5003
--	------------------------	---	-------------


RNAV (GPS) RWY 13
DIMMIT COUNTY (CZT)

▼ ▲ NA	Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Cotulla altimeter setting; when not received use Uvalde altimeter setting and increase all DA 52 feet, all MDA 60 feet and increase LPV all Cats, LNAV/VNAV all Cats, and Circling Cat C visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA.	MISSED APPROACH: Climb to 3000 direct ADDIL and hold.
-------------------------	--	---

AWOS-3 119.625	COT ASOS 118.325	HOUSTON CENTER 127.8 307.2	UNICOM 122.8 (CTAF)
--------------------------	----------------------------	--------------------------------------	-------------------------------

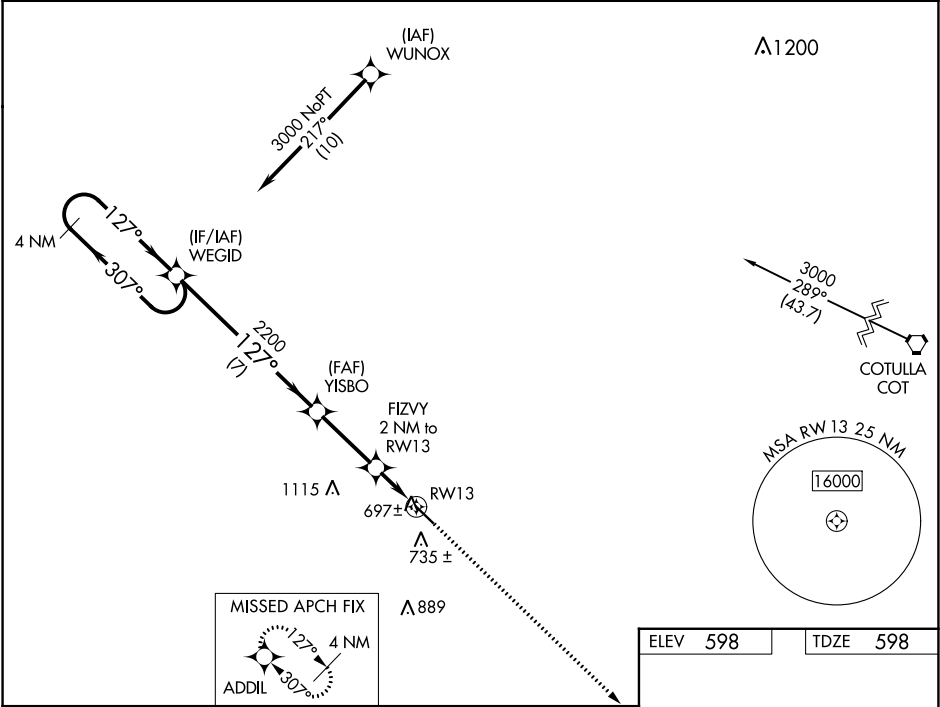

4 NM Holding Pattern		WEGID		3000 ADDIL	
3000		127°		*LNAV only.	
GP 3.00° TCH 40		2200		FIZVY 2 NM to RWY 13	
7 NM		2.9 NM		2 NM	
CATEGORY	A	B	C	D	
LPV DA	940-1½	342 (400-1½)		NA	
LNAV/VNAV DA	940-1½	342 (400-1½)		NA	
LNAV MDA	1040-1	442 (500-1)	1040-1½ 442 (500-1½)	NA	
CIRCLING	1160-1 562 (600-1)	1240-1 642 (700-1)	1500-2¾ 902 (1000-2¾)	NA	

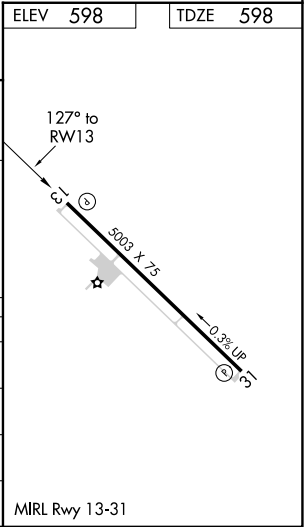


WAAS CH 50433 W31A	APP CRS 307°	Rwy Idg TDZE 589 Apt Elev 598	5003
--	------------------------	---	-------------


RNAV (GPS) RWY 31
DIMMIT COUNTY (CZT)

▼ ▲ NA	Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Cotulla altimeter setting; when not received use Uvalde altimeter setting and increase all DA 52 feet, all MDA 60 feet and increase LPV all Cnts, LNAV/VNAV all Cnts, and Circling Cat C visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA.	MISSED APPROACH: Climb to 3000 direct WEGID and hold.
-------------------------	--	---

AWOS-3 119.625	COT ASOS 118.325	HOUSTON CENTER 127.8 307.2	UNICOM 122.8 (CTAF)
---------------------------------	-----------------------------------	---	--------------------------------------

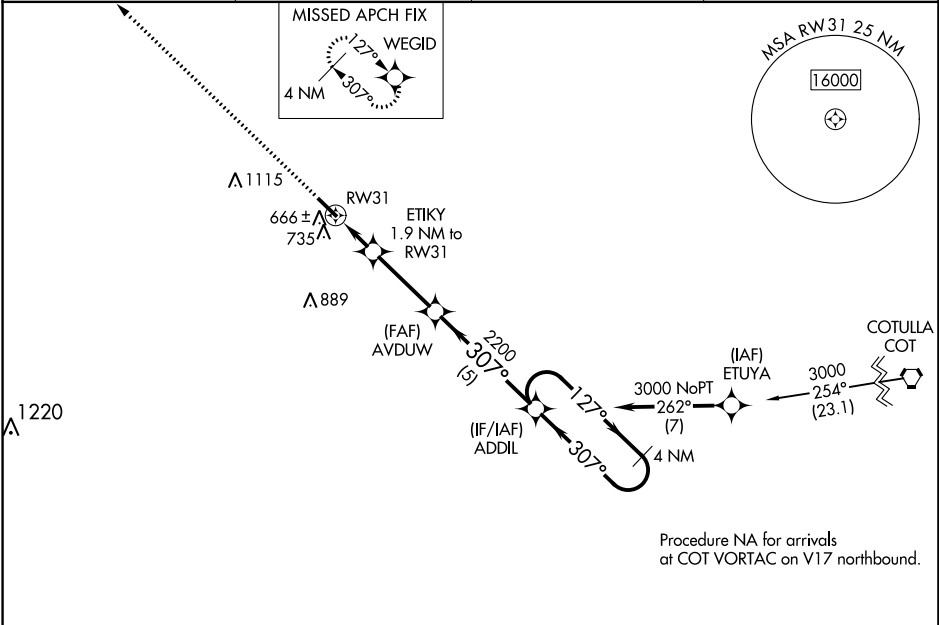

ELEV 598	TDZE 589
-----------------	-----------------

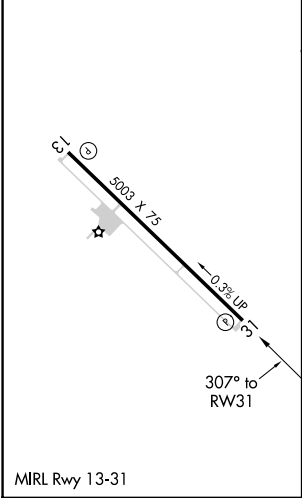

3000	WEGID			
3000	WEGID			
*LNAV only.	ETIKY 1.9 NM to RWY 31	AVDUW 2200	ADDIL 4 NM Holding Pattern	
*1220	*1220	2200	3000	GP 3.00° TCH 40
1.9 NM	3.1 NM	5 NM		
CATEGORY	A	B	C	D
LPV DA	931-1½	342 (400-1½)		NA
LNAV/VNAV DA	931-1½	342 (400-1½)		NA
LNAV MDA	1040-1	451 (500-1)	1040-1¾ 451 (500-1¾)	NA
CIRCLING	1160-1 562 (600-1)	1240-1 642 (700-1)	1500-2¾ 902 (1000-2¾)	NA