

WAAS CH 50404 W18A	APP CRS 176°	Rwy Idg TDZE Apt Elev	4403 914 918
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18


FORT SCOTT MUNI (F'SK)

NA


When local altimeter setting not received, use Chanute altimeter setting and increase all DAs 93 feet and all MDAs 100 feet; increase Circling Cat C/D visibility ½ SM. Baro-VNAV NA when using Chanute altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 3100 direct CAVEM and hold.

AWOS-3P 124.425	KANSAS CITY CENTER 125.55 327.0	UNICOM 122.8 (CTAF) 1
---------------------------	---	---------------------------------

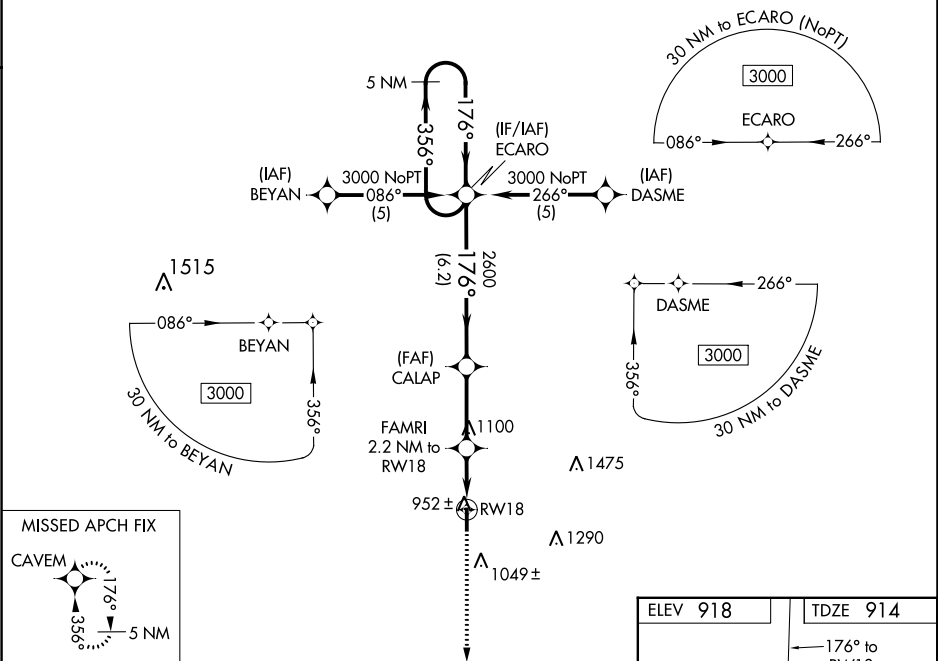

5 NM Holding Pattern				
3100 CAVEM				
GP 3.00° TCH 39				
6.2 NM 2.9 NM 2.2 NM				
CATEGORY	A	B	C	D
LPV DA	1164-1 250 (300-1)			
LNAV/ VNAV DA	1212-1 298 (300-1)			
LNAV MDA	1220-1 306 (400-1)			
CIRCLING	1280-1 362 (400-1)	1380-1 462 (500-1)	1640-2 722 (800-2)	1640-2 ¼ 722 (800-2 ¼)

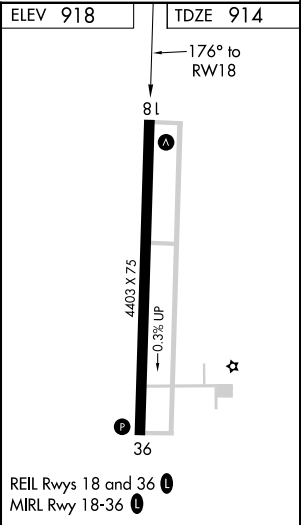

WAAS CH 56504 W36A	APP CRS 356°	Rwy Idg 4403 TDZE 918 Apt Elev 918
--	------------------------	---

RNAV (GPS) RWY 36

FORT SCOTT MUNI (F'SK)

⚠

NA

When local altimeter setting not received, use Chanute altimeter setting and increase all DAs 93 feet and all MDAs 100 feet; increase Circling Cat C/D visibility ½ SM. Baro-VNAV NA when using Chanute altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 3000 direct ECARO and hold.

AWOS-3P 124.425	KANSAS CITY CENTER 125.55 327.0	UNICOM 122.8 (CTAF) 0
---------------------------	---	--

