
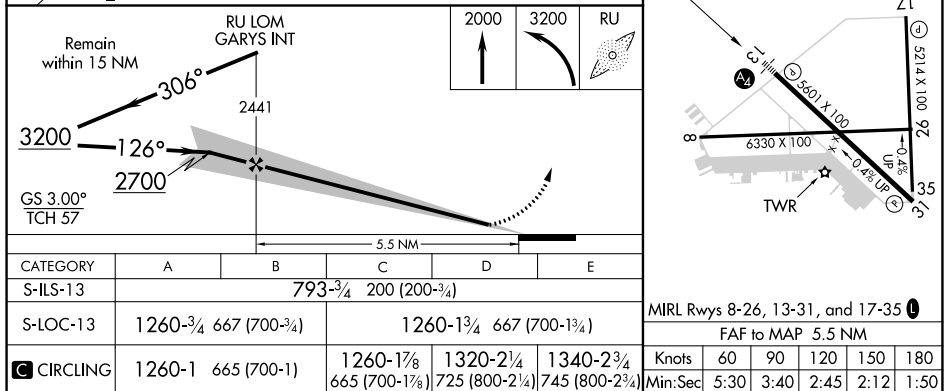


LOC I-RUM <u>108.7</u>	APP CRS 126°	Rwy Idg TDZE Apt Elev	5601 593 595
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 13
SAN MARCOS RGNL (HYI)

ADF required.		MALS	MISSED APPROACH: Climb to 2000 then climbing left turn to 3200 direct GARYS LOM/INT and hold.		
▼ ▲ NA Circling NA for Cat E southwest of Rwy 13-31. Inop table does not apply to S-HLS 13 all Cats. For inop ALS, increase S-LOC 13 Cat C/D/E visibility to 1% SM.					
ATIS ★ 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER ★ 126.825 (CTAF)	GND CON 120.125	CLNC DEL 120.125	CLNC DEL 121.35 (when twr closed)

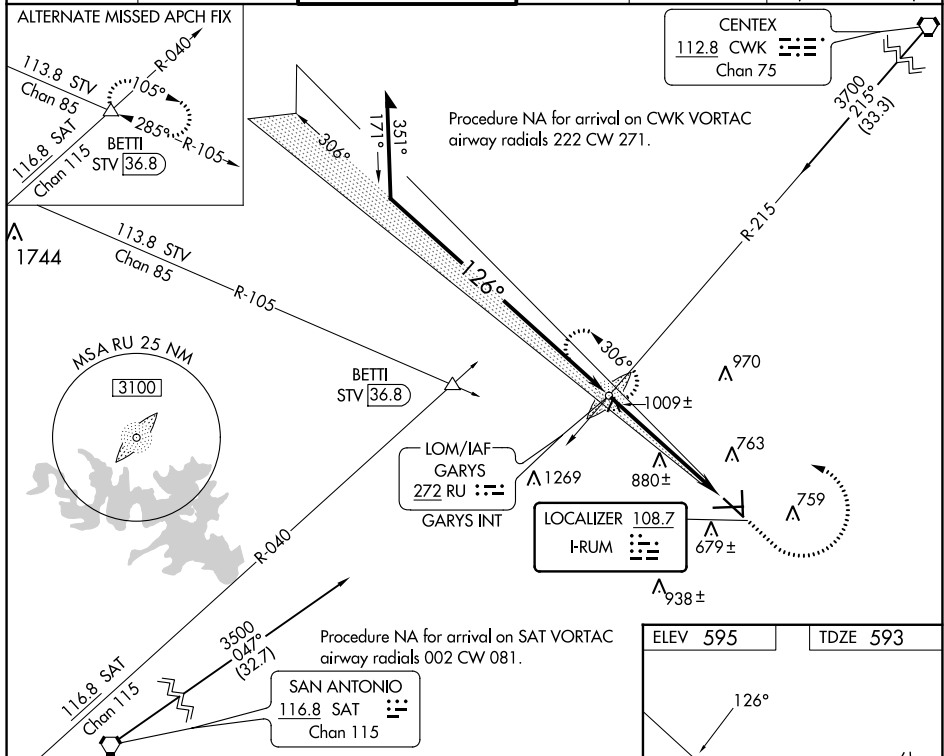

LOM	RU	APP CRS	Rwy Idg	5601
272		125°	TDZE	593
			Apt Elev	595

NDB RWY 13
SAN MARCOS RGNL (HYI)

MALS

MISSED APPROACH: Climb to 2000 then climbing left turn to 3200 direct GARYS LOM and hold.

ATIS ★
120.825




AUSTIN APP CON
119.0 370.85

SAN MARCOS TOWER★
126.825 (CTAF)

GND CON
120.125

CLNC DEL
120.125

CLNC DEL
121.35
(when twr closed)

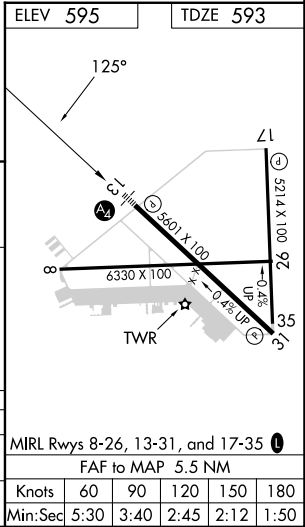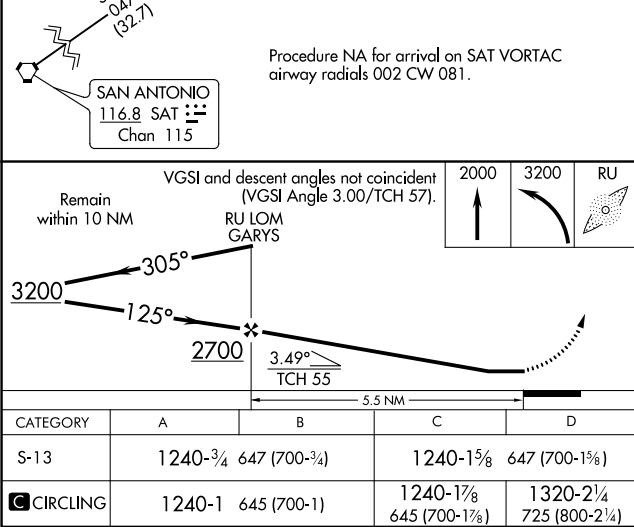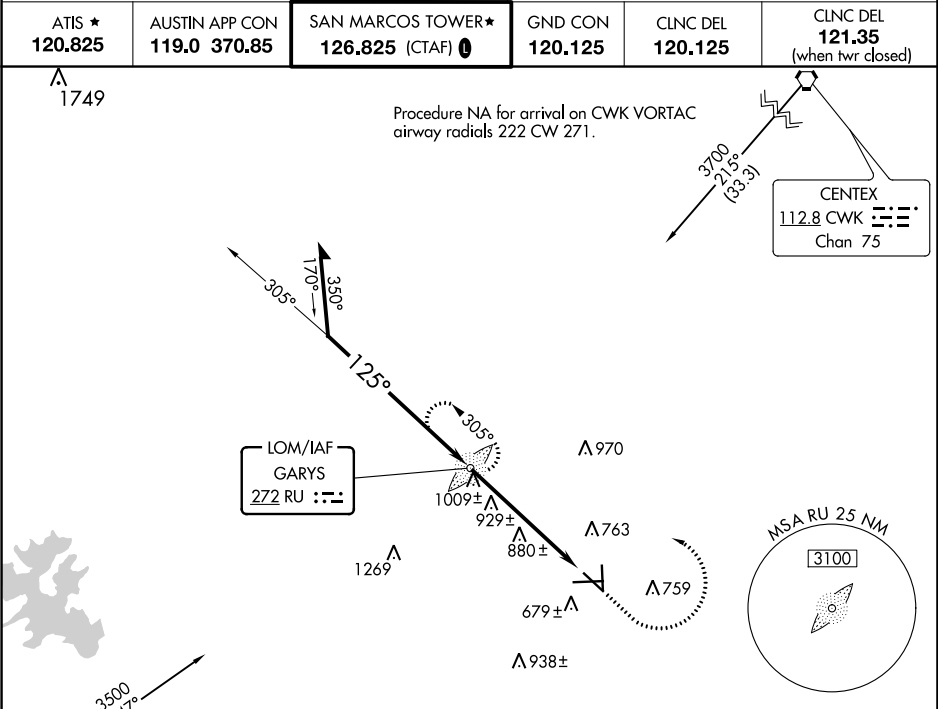


WAAS CH 86232 W13A	APP CRS 126°	Rwy Idg 5601 TDZE 593 Apt Elev 595
--	------------------------	---

RNAV (GPS) RWY 13

SAN MARCOS RGNL (HYI)

RNP APCH-GPS. ⚠ Circling NA for Cat E southwest of Rwy 13-31. Inop table does not apply to LPV all Cats. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV Cat E visibility to 1 SM and LNAV Cat E visibility to 1½ SM.				MALS  	MISSED APPROACH: Climb to 3000 direct HODAL and hold.
ATIS ★ 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER★ 126.825 (CTAF) 0	GND CON 120.125	CLNC DEL 120.125	CLNC DEL 121.35 (when twr closed)

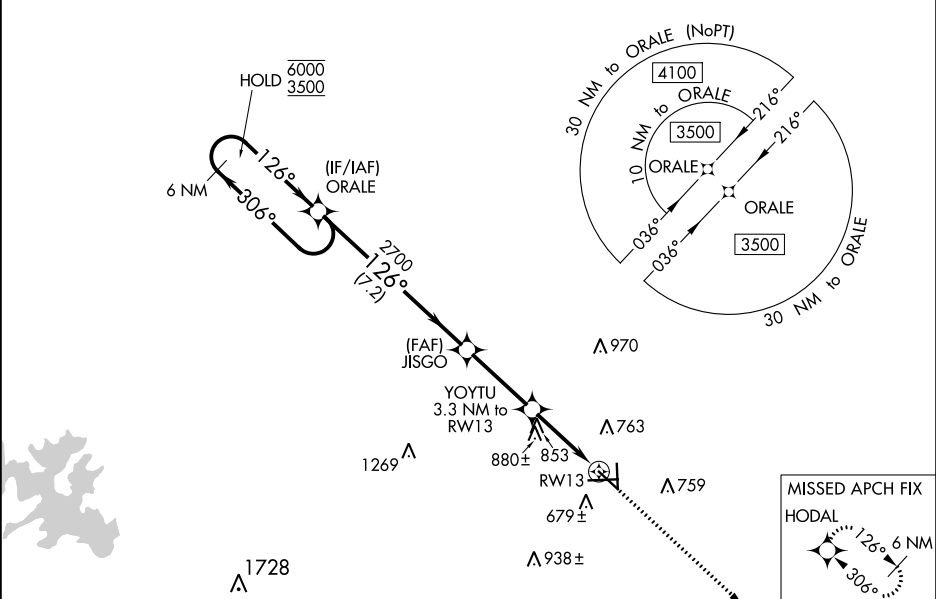

6 NM Holding Pattern ORALE JISGO YOYTU 3.3 NM to RW13 1.5 NM to RW13 RW13 3000 HODAL 6000 ← 306° 3500 → 126° GP 3.00° TCH 57 2700 1700 7.2 NM 3.1 NM 1.8 NM 1.5 NM					
CATEGORY	A	B	C	D	E
LPV DA	793-¾		200 (200-¾)		
LNAV/VNAV DA	946-¾		353 (400-¾)		
LNAV MDA	1120-¾ 527 (600-¾)		1120-1¼ 527 (600-1¼)		
CIRCLING	1120-1 525 (600-1)		1240-1¾ 645 (700-1¾)	1320-2¼ 725 (800-2¼)	1340-2¾ 745 (800-2¾)

ELEV 595

TDZE 593



WAAS CH 77832 W17A	APP CRS 171°	Rwy Idg TDZE 595 Apt Elev 595
--	------------------------	---

RNAV (GPS) RWY 17
SAN MARCOS RGNL (HYI)


⚠ Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV all Cats and Circling Cat C/D visibility ¼ mile; increase LNAV/VNAV all Cats and LNAV Cat C/D/E visibility ½ mile. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3100 direct CILAK and hold.

ATIS ★ 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER★ 126.825 (CTAF) 0	GND CON 120.125	CLNC DEL 120.125	CLNC DEL 121.35 (when twr closed)
--------------------------	---------------------------------------	---	---------------------------	----------------------------	--

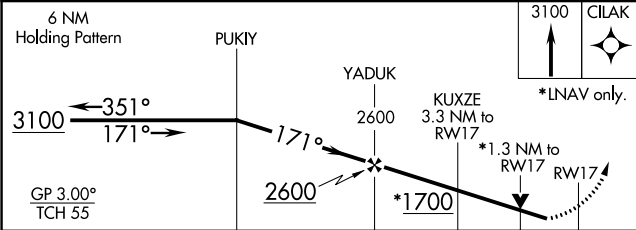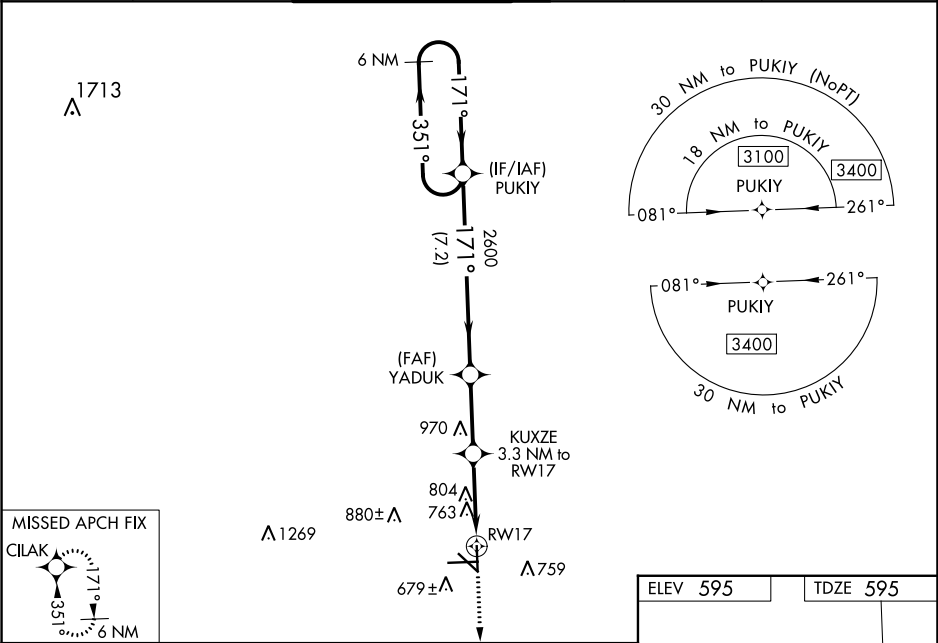

CATEGORY	A	B	C	D	E
LPV DA	960-1½		365 (400-1½)		
LNAV/VNAV DA	1052-1½		457 (500-1½)		
LNAV MDA	1060-1	465 (500-1)	1060-1¾		465 (500-1¾)
CIRCLING	1080-1 485 (500-1)	1120-1 525 (600-1)	1240-1¾ 645 (700-1¾)	1320-2¼ 725 (800-2¼)	1340-2¾ 745 (800-2¾)

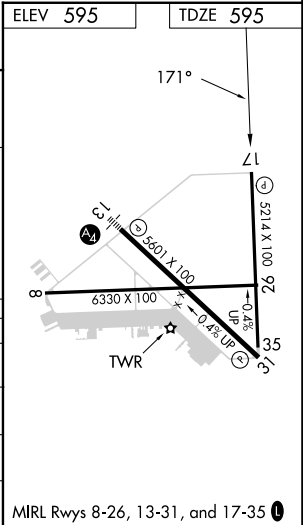

SC-3, 22 FEB 2024 to 21 MAR 2024

SC-3, 22 FEB 2024 to 21 MAR 2024

AUSTIN, TEXAS

AL-502 (FAA)

24025

WAAS CH 78332 W26A	APP CRS 261°	Rwy Idg 6330 TDZE 587 Apt Elev 595
--	------------------------	---


RNAV (GPS) RWY 26

SAN MARCOS RGNL (HYI)



⚠ Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats, and LNAV Cat C/D/E visibility 1/8 mile and Circling Cat C/D visibility 1/4 mile. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting. Helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH:
Climb to 3000 direct
RAJRY and hold.

ATIS ★ 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER★ 126.825 (CTAF) 0	GND CON 120.125	CLNC DEL 120.125	CLNC DEL 121.35 (when twr closed)
-------------------	--------------------------------	---------------------------------------	--------------------	---------------------	---

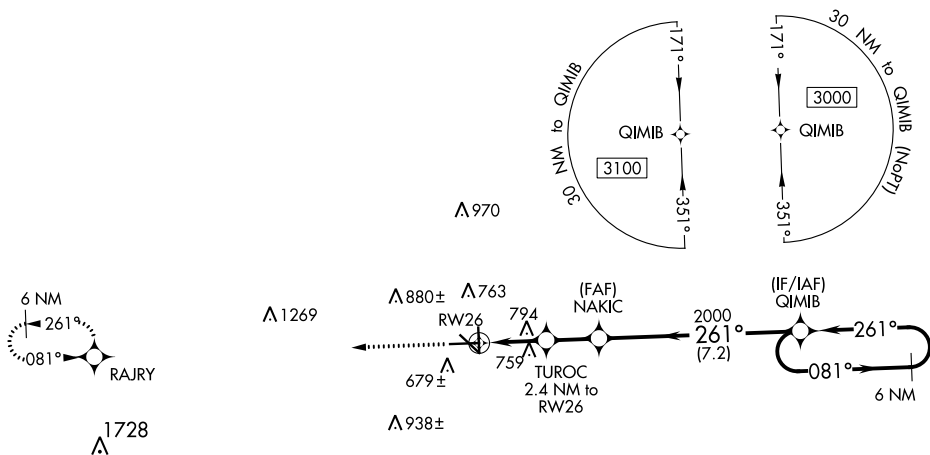

ELEV 595		TDZE 587
----------	--	----------

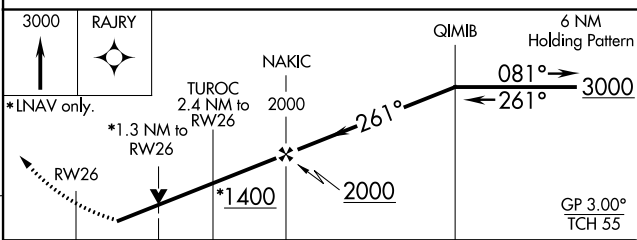[illegible]

AUSTIN, TEXAS

Orig-B 23JUN16

29°54'N-97°52'W

SAN MARCOS RGNL (HYT)

RNAV (GPS) RWY 26

SC-3, 22 FEB 2024 to 21 MAR 2024

WAAS CH 90432 W31A	APP CRS 306°	Rwy Idg TDZE Apt Elev 5601 583 595
--	------------------------	--


RNAV (GPS) RWY 31

SAN MARCOS RGNL (HYI)


Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility 1/8 mile and LNAV Cat C/D/E and Circling Cat C/D visibility 1/4. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting. Helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH:
Climb to 3500 direct
ORALE and hold.

ATIS ★ 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER★ 126.825 (CTAF)	GND CON 120.125	CLNC DEL 120.125	CLNC DEL 121.35 (when twr closed)
--------------------------	---------------------------------------	--	---------------------------	----------------------------	--

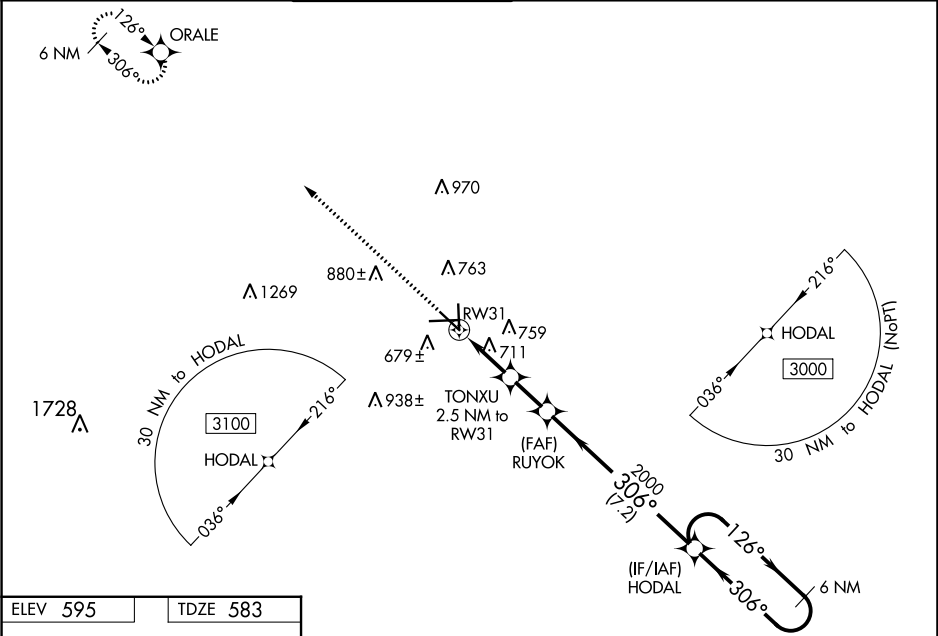

ELEV 595	TDZE 583
-----------------	-----------------

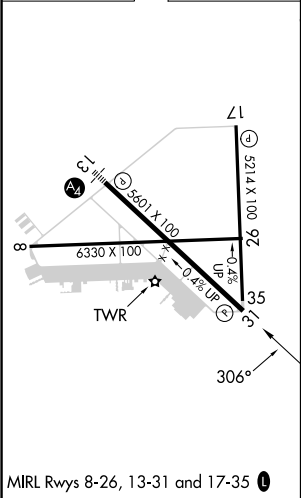

3500 ↑	ORALE 					
*LNAV only.		TONXU 2.5 NM to RW31	RUYOK 2000	126°→ ←306°	3000	
		*1.1 NM to RW31	*1420	2000	GP 3.00° TCH 60	
1.1 NM		1.4 NM	1.8 NM	7.2 NM		
CATEGORY	A		B	C	D	E
LPV DA	860-7/8 277 (300-7/8)					
LNAV/ VNAV DA	906-1 323 (400-1)					
LNAV MDA	980-1 397 (400-1)			980-1 3/8 397 (400-1 1/8)		
CIRCLING	1080-1 485 (500-1)	1120-1 525 (600-1)	1240-1 3/4 645 (700-1 1/4)	1320-2 1/4 725 (800-2 1/4)	1340-2 3/4 745 (800-2 3/4)	


WAAS CH 70632 W35A	APP CRS 351°	Rwy ldg TDZE 583 Apt Elev 595
--	------------------------	---

RNAV (GPS) RWY 35
SAN MARCOS RGNL (HYI)


⚠ Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility 1/8 mile; and increase LNAV Cat C/D/E visibility and Circling Cat C/D visibility 1/4. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting.

MISSED APPROACH:
Climb to 3100 direct PUKIY and hold.

ATIS ★ 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER ★ 126.825 (CTAF) 0	GND CON 120.125	CLNC DEL 120.125	CLNC DEL 121.35 (when twr closed)
--------------------------	---------------------------------------	--	---------------------------	----------------------------	--

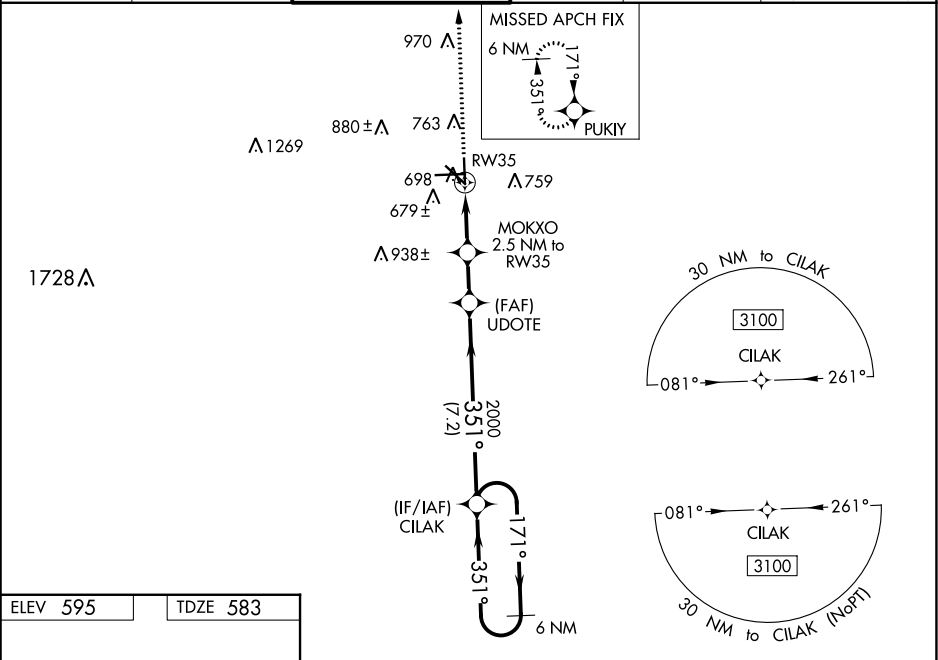

ELEV 595	TDZE 583
-----------------	-----------------

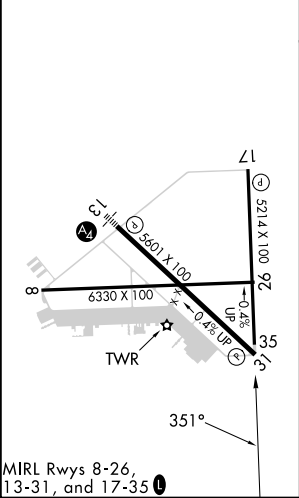

MIRL Rwy 8-26, 13-31, and 17-35

AUSTIN, TEXAS
Orig-B 23JUN16

3100	PUKIY	6 NM Holding Pattern			
					
*LNAV only.					

29°54'N-97°52'W

SAN MARCOS RGNL (HYI)
RNAV (GPS) RWY 35

SC-3, 22 FEB 2024 to 21 MAR 2024

SC-3, 22 FEB 2024 to 21 MAR 2024

WAAS CH 72932 W08A	APP CRS 081°	Rwy Idg TDZE 589 Apt Elev 595
--	------------------------	---



RNAV (GPS) RWY 8
SAN MARCOS RGNL (HYI)

RNP APCH.

⚠ Circling NA for Cat E SW of Rwy 13-31. Rwy 8 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. VDP NA with New Braunfels altimeter setting. When local altimeter setting not received, use New Braunfels altimeter setting and increase LPV DA to 882, LNAV/VNAV DA to 953 and increase all MDA 60 feet; increase LNAV Cat C/D/E and Circling Cat C/D visibility 1/4 SM.

MISSED APPROACH:
Climb to 3000 direct
QIMB and hold.

ATIS ★ 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER ★ 126.825 (CTAF) 0	GND CON 120.125	CLNC DEL 120.125	CLNC DEL 121.35 (when twr closed)
--------------------------	---------------------------------------	--	---------------------------	----------------------------	--

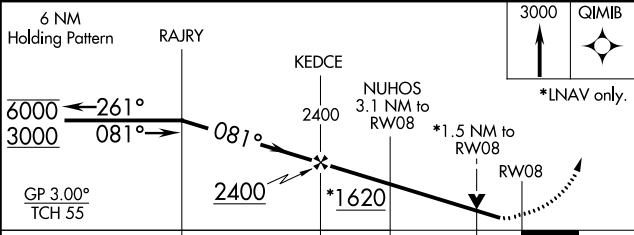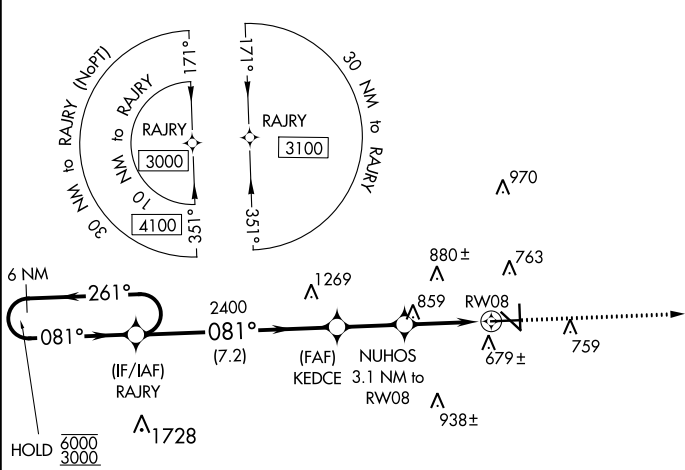

CATEGORY	A	B	C	D	E
LPV DA		839-1	250 (300-1)		
LNAV/VNAV DA		910-1	321 (400-1)		
LNAV MDA	1120-1	531 (600-1)	1120-1½	531 (600-1½)	
CIRCLING	1120-1	525 (600-1)	1240-1¾ 645 (700-1¾)	1320-2¼ 725 (800-2¼)	1340-2¾ 745 (800-2¾)

