RNAV (GPS) RWY 10

FAIRFIELD COUNTY (LHQ)

WAAS	APP CRS	Rwy Idg	5003
CH 97701	100°	TDZE	857
W10A		Apt Elev	868

RNP APCH.

Baro-VNAV and VDP NA when using Rickenbacker Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Rickenbacker Intl altimeter setting and increase all DAs 48 feet, and all MDAs 60 feet, and increase LPV, LNAV/VNAV all Cats and Circling Cat C visibility ¼ mile. Rwy 10 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2800 direct DIPAC and hold.

ASOS	COLUMBUS APP CON	CLNC DEL	UNICOM
118.375	134.0 279.6	121.65	122.725 (CTAF) L

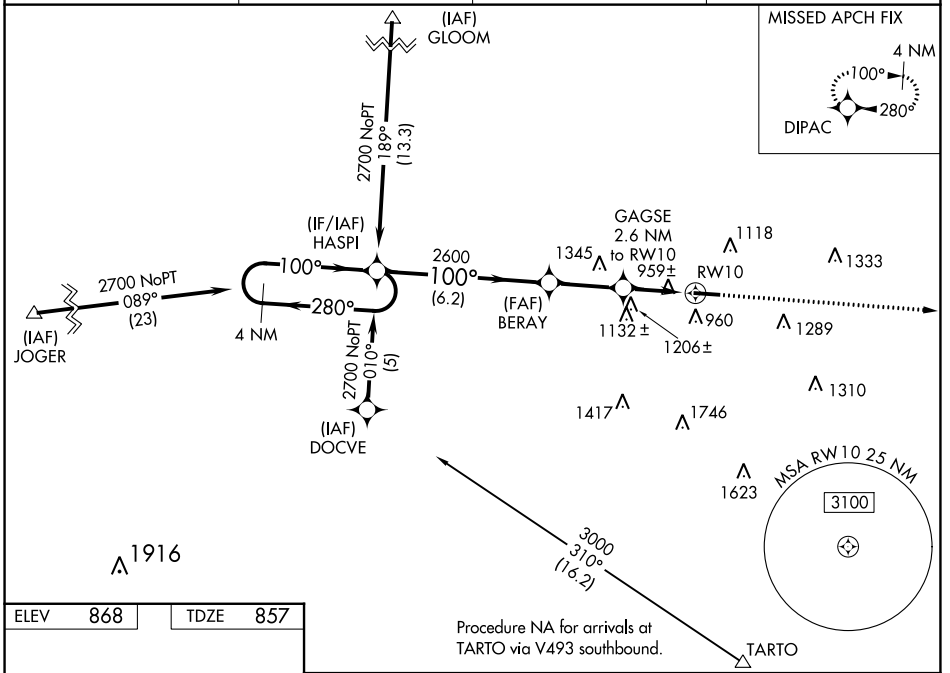

ELEV 868 TDZE 857



REIL Rwys 10 and 28 L
MIRL Rwy 10-28 L

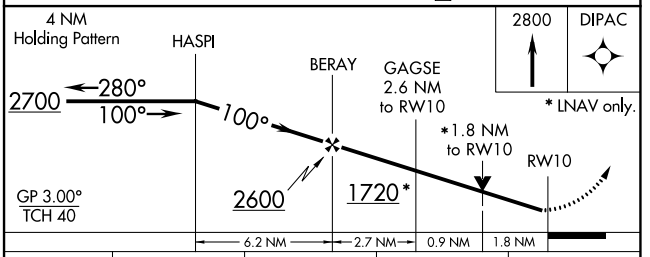

CATEGORY	A	B	C	D
LPV DA	1170-1 313 (400-1)			NA
LNAV/VNAV DA	1291-1½ 434 (500-1½)			NA
LNAV MDA	1460-1 603 (600-1)		1460-1¾ 603 (600-1¾)	NA
CIRCLING	1520-1 652 (700-1)	1560-1 692 (700-1)	1720-2½ 852 (900-2½)	NA

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 28

FAIRFIELD COUNTY (LHQ)

WAAS	APP CRS		
CH 69628 W28A	280°	Rwy Idg	5003
		TDZE	868
		Apt Elev	868

RNP APCH.

Baro-VNAV NA when using Rickenbacker Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 54°C. Rwy 28 helicopter visibility reduction below ¾ SM NA. VDP NA with Rickenbacker Intl altimeter setting. When local altimeter setting not received, use Rickenbacker Intl altimeter setting and increase all DA 48 feet; increase all MDA 60 feet.

MISSED APPROACH: Climb to 2700 direct HASPI and hold.

ASOS	COLUMBUS APP CON	CLNC DEL	UNICOM
118.375	134.0 279.6	121.65	122.725 (CTAF) L

MISSED APCH FIX

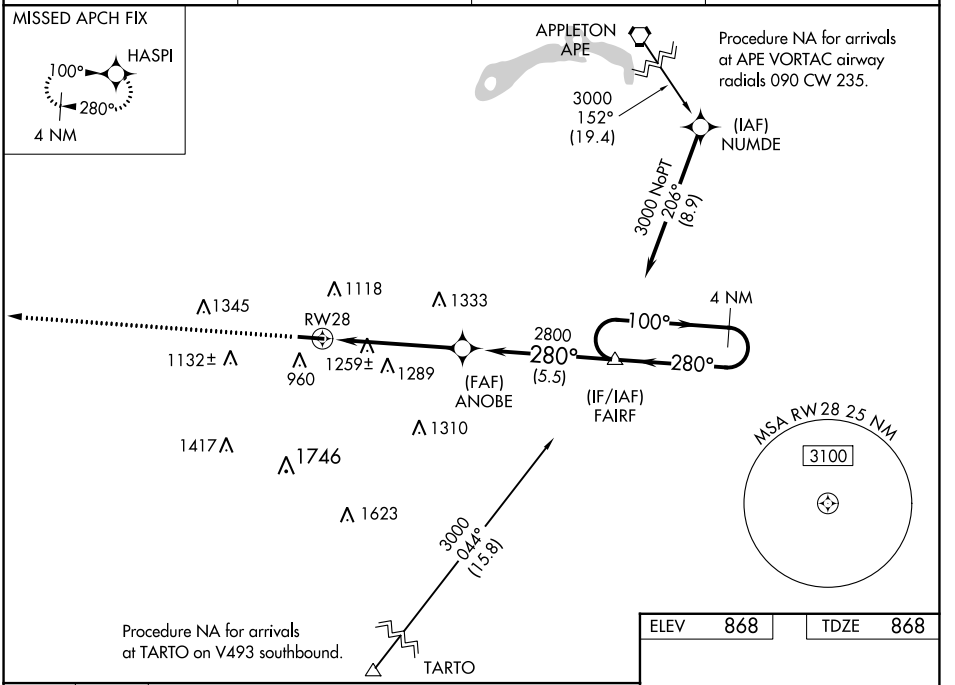

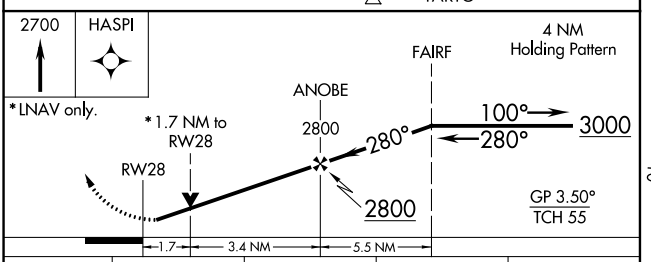

CATEGORY	A	B	C	D
LPV DA	1068-¾ 200 (200-¾)		NA	
LNAV/VNAV DA	1641- 2½ 773 (800-2½)		NA	
LNAV MDA	1520-1 652 (700-1)		NA	
CIRCLING	1520-1 652 (700-1)	1560-1 692 (700-1)	NA	

ELEV 868 TDZE 868



REIL Rwys 10 and 28 L
MIRL Rwy 10-28 L

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024

VORTAC APE	APP CRS	Rwy Idg	N/A
116.7	194°	TDZE	N/A
Chan 114		Apt Elev	868

VOR or GPS-A
FAIRFIELD COUNTY (LHQ)

NA

MISSED APPROACH: Climb to 2000, then climbing left turn to 3000 direct APE VORTAC and hold.

ASOS	COLUMBUS APP CON	CLNC DEL	UNICOM
118.375	134.0 279.6	121.65	122.725 (CTAF) L

2049

IAF
APPLETON
116.7 APE
Chan 114

014° 194°

3000
194° (18)

DME or RADAR REQUIRED

JUBBI
APE 18
RADAR

194°

(MAGCO)

1280
1345
1333
1132±
960
1289
1310
1417
1746

MSA APE 30 NM
3100

ELEV 868

194°

10 5003 X 75 28

REIL Rwys 10 and 28 L
MIRL Rwy 10-28 L

2000 3000 APE

JUBBI
APE 18
RADAR

APE
VORTAC

(MAGCO)
APE 23.9

3000 194° 3000

Procedure
Turn
NA

5.9 NM 18 NM

FAF to MAP 5.9 NM

Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

CATEGORY	A	B	C	D
CIRCLING	1580-1 712 (800-1)	1580-1¼ 712 (800-1¼)	1720-2½ 852 (900-2½)	NA

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024