


WAAS CH 53738 W10A	APP CRS 100°	Rwy Idg TDZE Apt Elev	5001 197 197
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 10

JOHN EDWIN JONES SR FLD/METTER MUNI (MHP)

▼ ▲ NA	Baro-VNAV NA. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¼ SM NA. Use Claxton altimeter setting; when not received, use Vidalia altimeter setting and increase LPV DA to 543, LNAV/VNAV DA to 500, increase all MDA 20 feet, increase LNAV Cat C/D visibility ½ mile and Circling Cat C/D visibility ¼ mile.	MISSED APPROACH: Climb to 700 then climbing right turn to 3000 direct LOTTs and hold.
-----------------------	---	---

AWOS-3PT 120.3	CWV AWOS-3 120.075	JACKSONVILLE CENTER 132.925 363.2	UNICOM 123.0 (CTAF) 0
--------------------------	------------------------------	---	---------------------------------

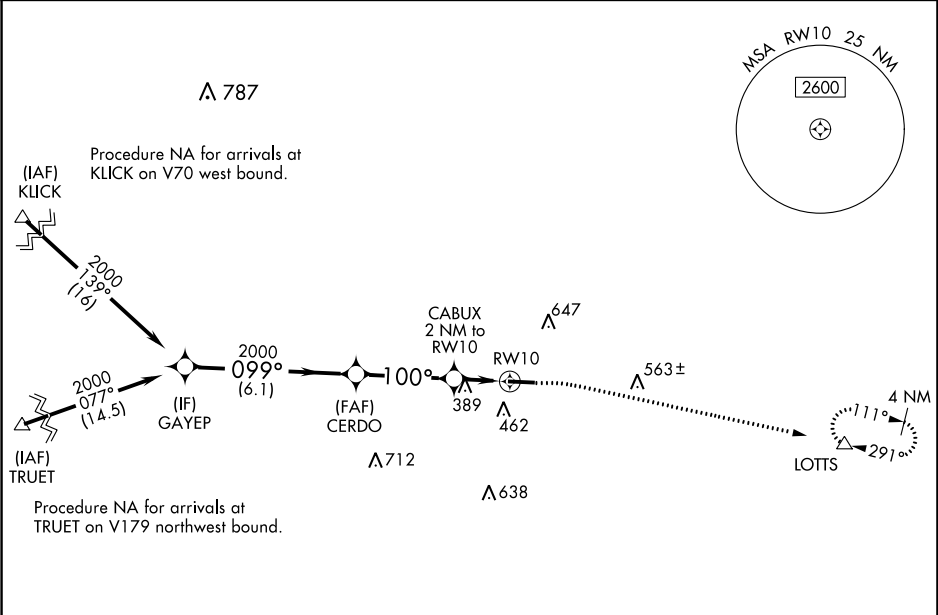

					ELEV 197	TDZE 197	
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 32).					700 ↑	3000 ↷	LOTS △
GAYEP 2000 099°					CERDO 2000 100°	*LNNAV only.	
GP 3.00° TCH 60					CABUX 2 NM to RW10 *880	RW10	100° to RW10
6.1 NM					3.5 NM	2 NM	5001 X 75
CATEGORY	A	B	C	D			
LPV DA	537-1½		340 (400-1½)				
LNAV/ VNAV DA	494-1		297 (300-1)				
LNAV MDA	700-1	503 (600-1)	700-1½	503 (600-1½)			
CIRCLING	820-1 623 (700-1)	880-1 683 (700-1)	1060-2½ 863 (900-2½)	1060-2¾ 863 (900-2¾)	MIRL Rwy 10-28 REIL Rwy 10		

WAAS
CH 78438
W28A

APP CRS
280°

Rwy Idg
TDZE
Apt Elev

5001
197
197

RNAV (GPS) RWY 28

JOHN EDWIN JONES SR FLD/METTER MUNI (MHP)

▼

NA

Baro-VNAV NA. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. Use Claxton altimeter setting; when not received, use Vidalia altimeter setting and increase LPV DA to 500, LNAV/VNAV DA to 533, increase all MDA 20 feet, increase LNAV/VNAV all Cats and LNAV Cat C/D visibility ½ mile and Circling Cat C/D visibility ¼ mile.

MISSED APPROACH: Climb to 700 then climbing left turn to 3000 direct LOTS and hold.

AWOS-3PT 120.3	CWV AWOS-3 120.075	JACKSONVILLE CENTER 132.925 363.2	UNICOM 123.0 (CTAF) 0
-------------------	-----------------------	--------------------------------------	--------------------------

ELEV 197

TDZE 197

700

3000

LOTS

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 27).

280° to RW 28

10

5001 X 75

28

MIRL Rwy 10-28 0

REIL Rwy 10 0

*LNAV only.

CULIX 2.1 NM to RW28

JAMEB 1800

LOTS

4 NM Holding Pattern

111°

291°

3000

GP 3.00°

TCH 57

2.1 NM

2.8 NM

6.6 NM

CATEGORY	A	B	C	D
LPV DA	494-1 297 (300-1)			
LNAV/VNAV DA	527-1 330 (400-1)			
LNAV MDA	620-1 423 (500-1)		620-1¼ 423 (500-1¼)	
CIRCLING	820-1 623 (700-1)	880-1 683 (700-1)	1060-2½ 863 (900-2½)	1060-2¾ 863 (900-2¾)

METTER, GEORGIA

JOHN EDWIN JONES SR FLD/METTER MUNI (MHP)

Amdt 1 26MAY16

32°22'N-82°05'W

RNAV (GPS) RWY 28