

WAAS CH 58030 W14A	APP CRS 141°	Rwy Idg 3999 TDZE 1034 Apt Elev 1034
--	------------------------	---



RNAV (GPS) RWY 14

MONTEVIDEO-CHIPPEWA COUNTY (MVE)

- V** Baro-VNAV NA when using Granite Falls altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -30°C (-22°F) or above 54°C (130°F). When local altimeter setting not received, use Granite Falls altimeter setting and increase LPV DA to 1320 feet; increase LNAV/VNAV DA to 1320 feet; increase all MDAs 40 feet and LNAV visibility Cats C/D ½ SM and Circling visibility Cats C/D ¼ SM. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When VGSI on, Straight-in and Circling Rwy 14 procedures NA at night. Circling to Rwy 3-21 NA.

MISSED APPROACH.
Climb to 3300 direct
YIBUG and hold.

AWOS-3PT 119.675	MINNEAPOLIS CENTER 125.5 323.1	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

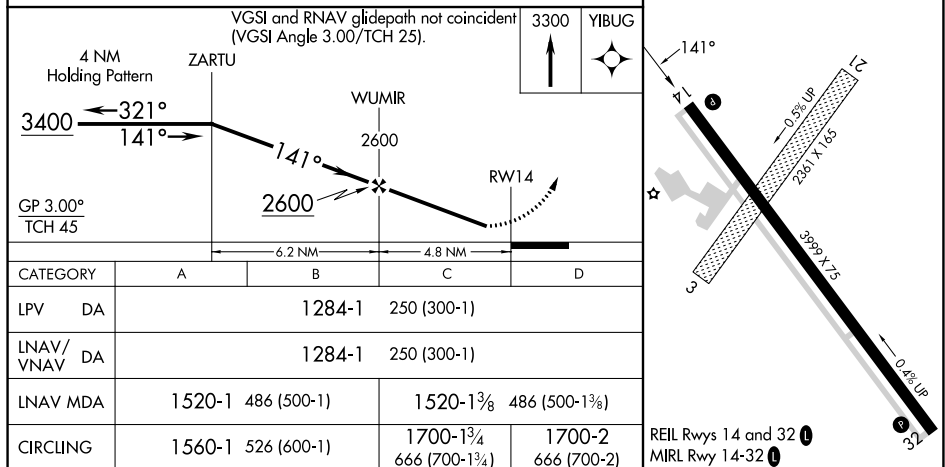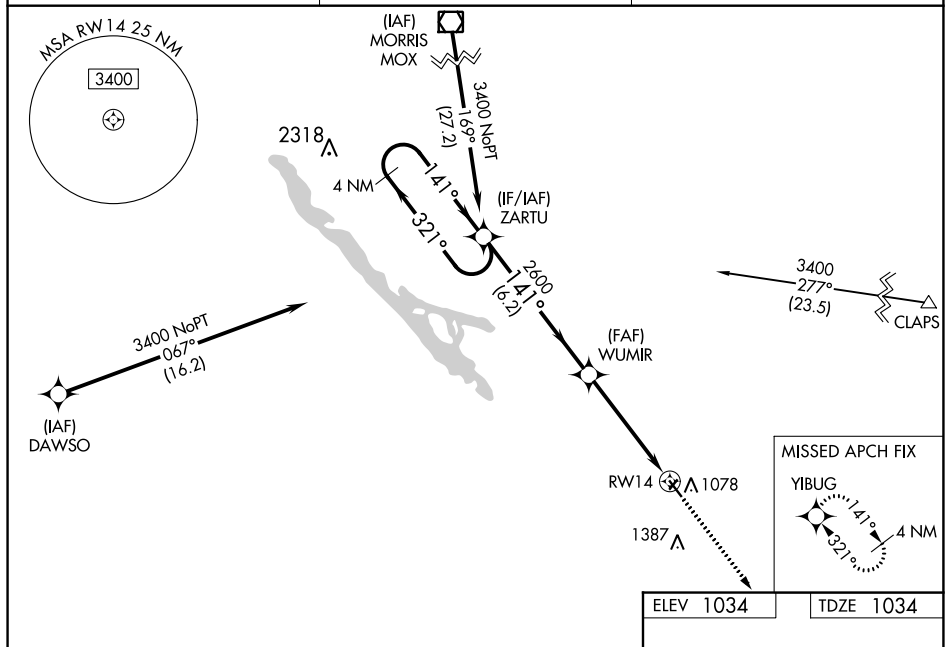

WAAS CH 86430 W32A	APP CRS 321°	Rwy Idg TDZE 1028 Apt Elev 1034
--	------------------------	---

RNAV (GPS) RWY 32

MONTEVIDEO-CHIPPEWA COUNTY (MVE)



⚠

Circling to Rwy 14 NA at night. Baro-VNAV NA when using Granite Falls altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -30°C (-22°F) or above 54°C (130°F). When local altimeter setting not received, use Granite Falls altimeter setting and increase LPV DA to 1270 feet; increase LNAV/VNAV DA to 1464 feet and increase visibility all Cats ½ SM; increase all MDAs 40 feet and LNAV visibility Cats C/D ¼ SM and Circling visibility Cats C/D ¼ SM. DME/DME RNP -0.3 NA. Circling to Rwy 3-21 NA. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:

Climb to 3400 direct ZARTU and hold.

AWOS-3PT 119.675	MINNEAPOLIS CENTER 125.5 323.1	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

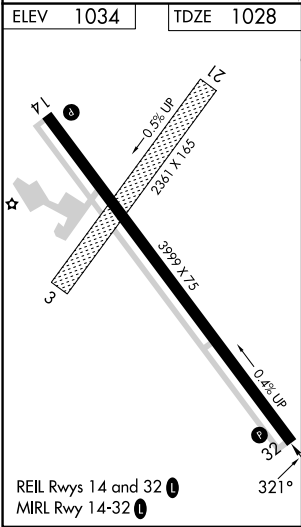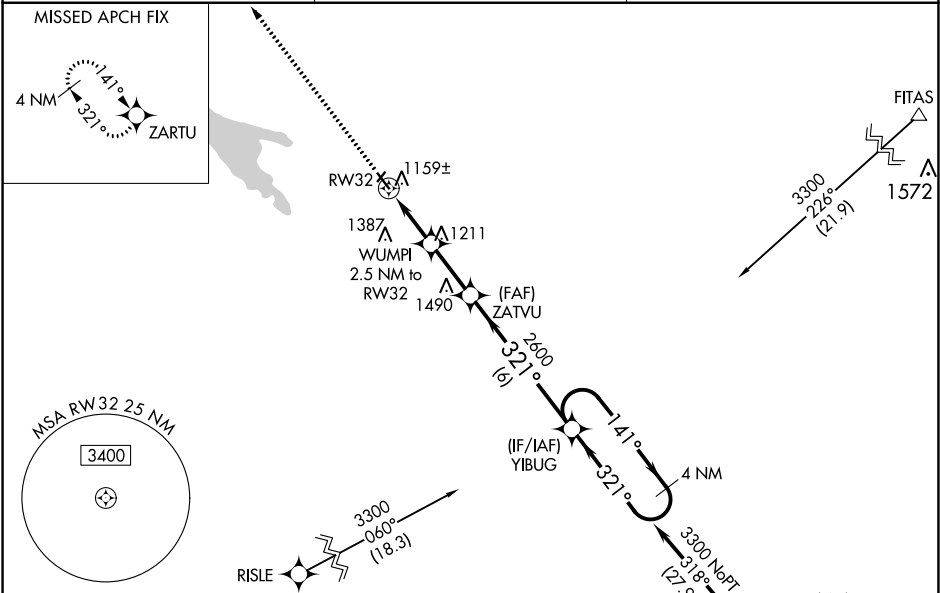

3400	ZARTU	WUMPI	ZATVU	YIBUG	4 NM Holding Pattern
* LNAV only		2.5 NM to RW32			
		* 1.2 NM to RW32			
		1860*			
		1.2 NM	1.3 NM	2.3 NM	6 NM
CATEGORY	A	B	C	D	
LPV DA	1234-1 206 (200-1)				
LNAV/VNAV DA	1428-1¾ 400 (400-1¾)				
LNAV MDA	1420-1 392 (400-1)		1420-1½ 392 (400-1½)		
CIRCLING	1560-1 526 (600-1)		1700-1¾ 666 (700-1¾)		1700-2 666 (700-2)