


LOC/DME I-PGD 109.75 Chan 34	APP CRS 035°	Rwy Idg 7193 TDZE 24 Apt Elev 26
--	------------------------	---

ILS or LOC RWY 4
PUNTA GORDA (PGD)

T When local altimeter setting not received, use Page Fld altimeter setting and increase DA to 274 feet and all MDAs 60 feet; increase S-LOC 4 Cats C and D visibility $\frac{1}{8}$ SM, and Circling Cats C and D visibility $\frac{1}{4}$ SM; ISOXE fix minimums: increase S-LOC 4 Cats C and D visibility $\frac{1}{8}$ SM, and Circling Cats C and D visibility $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 500 then climbing right turn to 2000 on heading 040° and PGD VOR R-059 to JOCKS INT and hold.


ATIS ★ 135.675	FORT MYERS APP CON ★ 127.05 306.2	PUNTA GORDA TOWER ★ 121.0 (CTAF) 0	GND CON 119.55	CLNC DEL 119.55	CLNC DEL 127.05 (When twr closed)	UNICOM 122.975
-------------------	--------------------------------------	---------------------------------------	-------------------	--------------------	---	-------------------

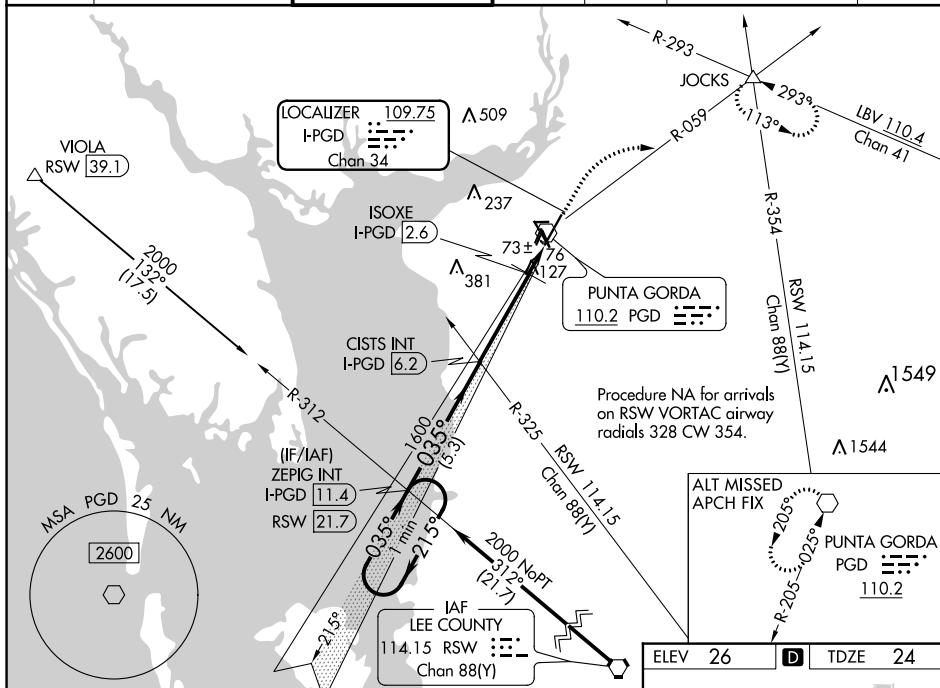


* 520 When using Page Fld altimeter setting.

One Minute Holding Pattern


ZEPIG INT
I-PGD 11.4



*LOC only.



CATEGORY	A	B	C	D
S-ILS 4	224- ³ / ₄ 200 (200- ³ / ₄)			
S-LOC 4	460-1	436 (500-1)	460-1 ¹ / ₄	436 (500-1 ¹ / ₄)
 CIRCLING	460-1 434 (500-1)	580-1 554 (600-1)	600-1 ¹ / ₂ 574 (600- ¹ / ₂)	740-2 ¹ / ₄ 714 (800-2 ¹ / ₄)
ISOXE FIX MINIMUMS (DME REQUIRED)				
S-LOC 4	380-1		356 (400-1)	
 CIRCLING	460-1 434 (500-1)	580-1 554 (600-1)	600-1 ¹ / ₂ 574 (600- ¹ / ₂)	740-2 ¹ / ₄ 714 (800-2 ¹ / ₄)

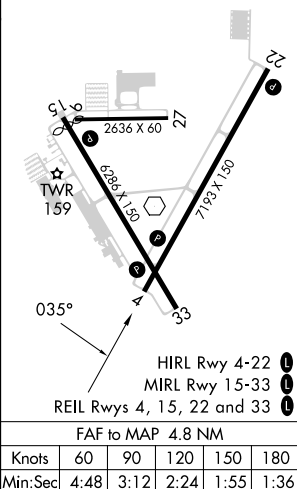

PUNTA GORDA, FLORIDA
Orig-A 30JAN20

26°55'N-81°59'W

PUNTA GORDA (PGD)
ILS or LOC RWY 4

SE-3, 22 FEB 2024 to 21 MAR 2024

SE-3, 22 FEB 2024 to 21 MAR 2024


22307

RNAV (GPS) RWY 15
PUNTA GORDA (PGD)


T
A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C.

MISSED APPROACH: Climb to 2500 direct DODIK and track 203° to OWGAF and hold.

ATIS ★ 135.675	FORT MYERS APP CON ★ 127.05 306.2	PUNTA GORDA TOWER ★ 121.0 (CTAF) 0	GND CON 119.55	CLNC DEL 119.55	CLNC DEL 127.05 (When twr closed)	UNICOM 122.975
-------------------	--------------------------------------	---------------------------------------	-------------------	--------------------	---	-------------------

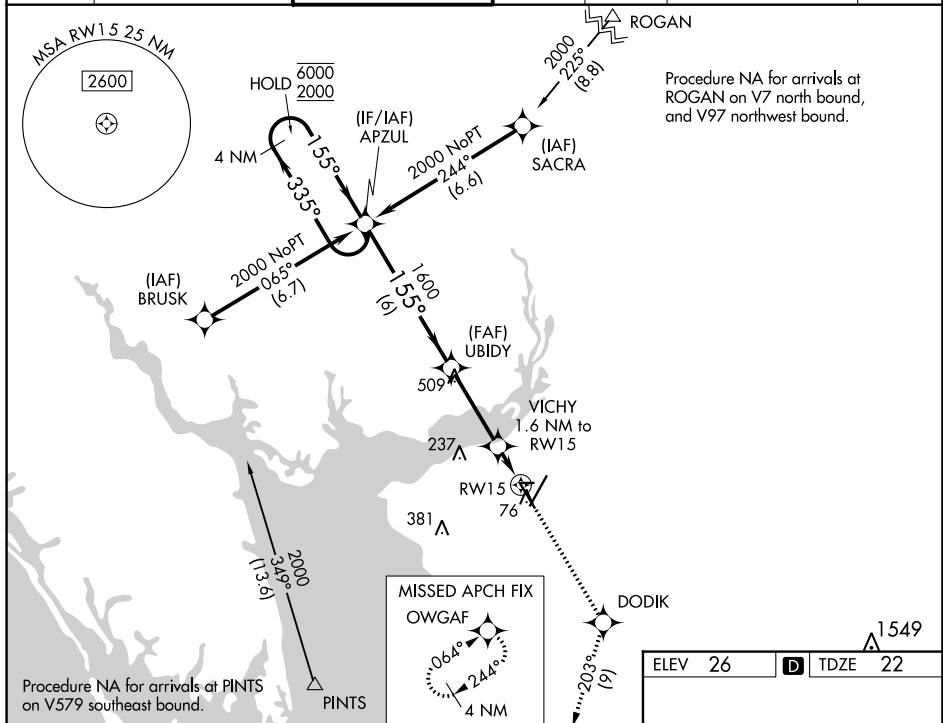

CATEGORY	A	B	C	D
LPV DA		272- $\frac{3}{4}$	250 (300- $\frac{3}{4}$)	
RNAV/ VNAV DA		320- $\frac{7}{8}$	298 (300- $\frac{7}{8}$)	
RNAV MDA	420-1	398 (400-1)	420-1 $\frac{1}{8}$	398 (400-1 $\frac{1}{8}$)
C CIRCLING	460-1 434 (500-1)	580-1 554 (600-1)	600-1 $\frac{1}{2}$ 574 (600-1 $\frac{1}{2}$)	740-2 $\frac{1}{4}$ 714 (800-2 $\frac{1}{4}$)

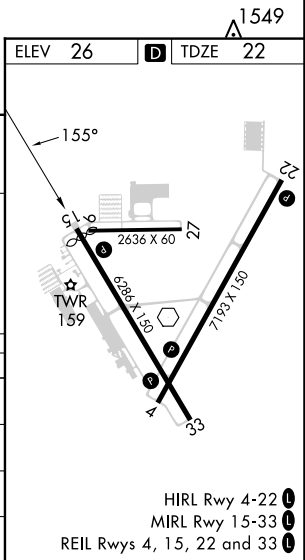

PUNTA GORDA (PGD)
RNAV (GPS) RWY 15

SE-3, 22 FEB 2024 to 21 MAR 2024



SE-3, 22 FEB 2024 to 21 MAR 2024

WAAS CH 45905 W22A	APP CRS 215°	Rwy Idg TDZE 26 Apt Elev 26	7193
--	------------------------	---	-------------

RNAV (GPS) RWY 22

PUNTA GORDA (PGD)

RNP APCH.				MISSED APPROACH: Climb to 2000 direct BULOW and hold.			
Baro-VNAV NA when using Page Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. When local altimeter setting not received, use Page Fld altimeter setting and increase LPV DA to 276, LNAV/VNAV DA to 360, and all MDAs 60 feet; increase LNAV Cats C and D visibility ¼ SM, and Circling Cats C and D visibility ¼ SM.							
ATIS ★ 135.675	FORT MYERS APP CON ★ 127.05 306.2	PUNTA GORDA TOWER ★ 121.0 (CTAF) 0	GND CON 119.55	CLNC DEL 119.55	CLNC DEL 127.05 (When twr closed)	UNICOM 122.975	

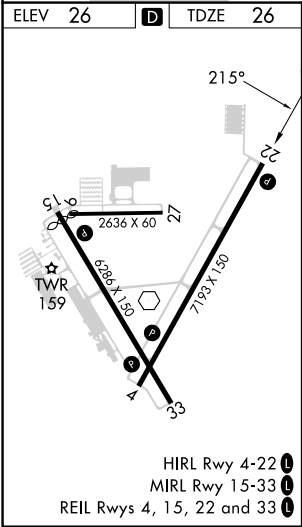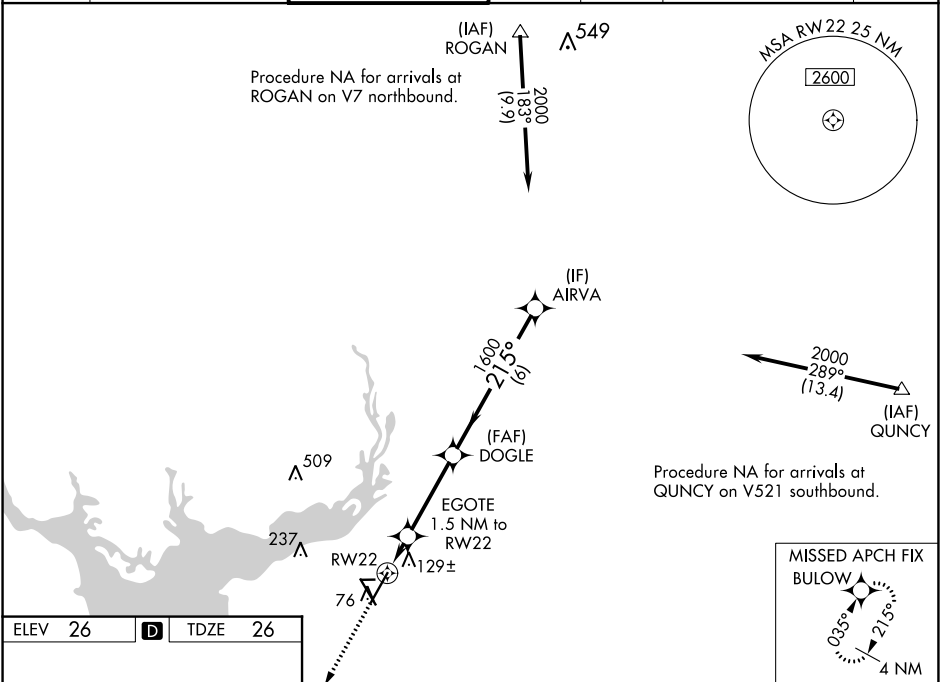




2000 BULOW		VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 31).		AIRVA	
*LNAV only.		EGOTE 1.5 NM to RW22		DOGLE 1600	
RW22		540*		2000	
1.5 NM		3.3 NM		6 NM	
CATEGORY	A	B	C	D	
LPV DA	226-3/4		200 (200-3/4)		
LNAV/VNAV DA	310-1		284 (300-1)		
LNAV MDA	420-1		420-1 1/8 394 (400-1 1/8)		
CIRCLING	460-1 434 (500-1)	580-1 554 (600-1)	600-1 1/2 574 (600-1 1/2)	740-2 1/4 714 (800-2 1/4)	

WAAS CH 93507 W33A	APP CRS 335°	Rwy Idg TDZE Apt Elev	6015 23 26
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 33

PUNTA GORDA (PGD)

RNP APCH.						MISSED APPROACH: Climb to 2000 direct APZUL and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C.							
ATIS ★ 135.675	FORT MYERS APP CON ★ 127.05 306.2	PUNTA GORDA TOWER ★ 121.0 (CTAF) 0	GND CON 119.55	CLNC DEL 119.55	CLNC DEL 127.05 (When twr closed)	UNICOM 122.975	

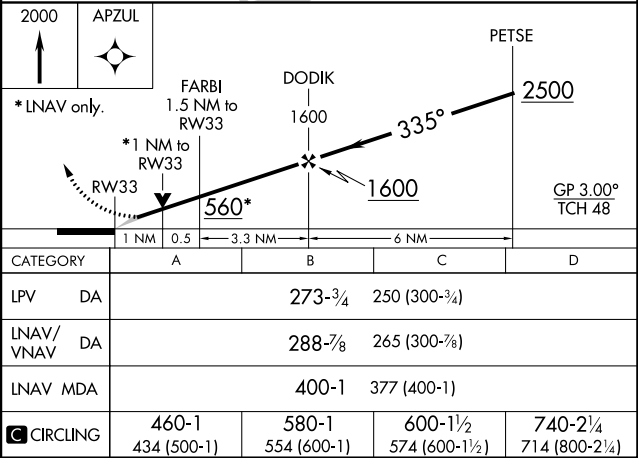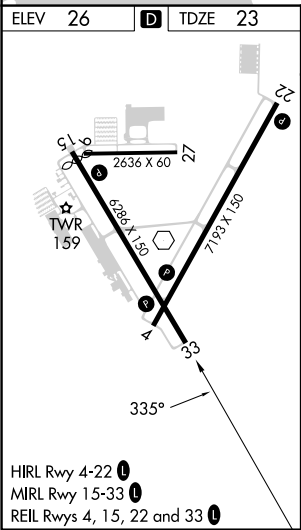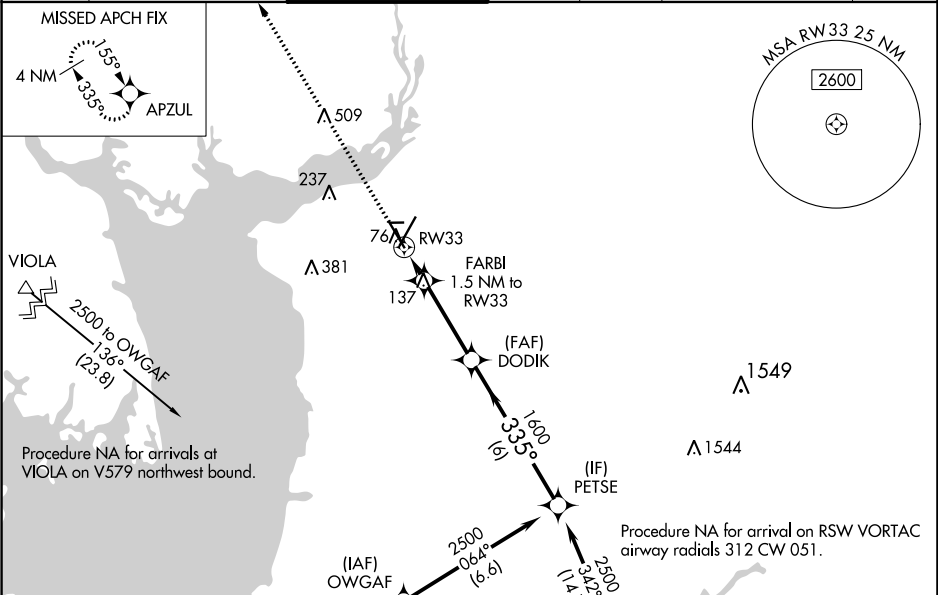

WAAS CH 48807 W04A	APP CRS 035°	Rwy Idg TDZE 24 Apt Elev 26
--	------------------------	---

RNAV (GPS) RWY 4

PUNTA GORDA (PGD)


RNP APCH

⚠


When local altimeter setting not received, use Page Fld altimeter setting and increase LPV DA to 274 feet, LNAV/VNAV DA to 443 feet, and all MDA 60 feet; increase LNAV/VNAV all Cats visibility ¼ SM, LNAV Cats C and D visibility ¼ SM, and Circling Cats C and D visibility ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 54°C. Baro-VNAV and VDP NA when using Page Fld altimeter setting.

MISSED APPROACH: Climb to 2000 direct DOGLE and track 087° to JOCKS and hold.

ATIS ★ 135.675	FORT MYERS APP CON ★ 127.05 306.2	PUNTA GORDA TOWER ★ 121.0 (CTAF) 0	GND CON 119.55	CLNC DEL 119.55	CLNC DEL 127.05 (When twr closed)	UNICOM 122.975
--------------------------	---	--	--------------------------	---------------------------	--	--------------------------

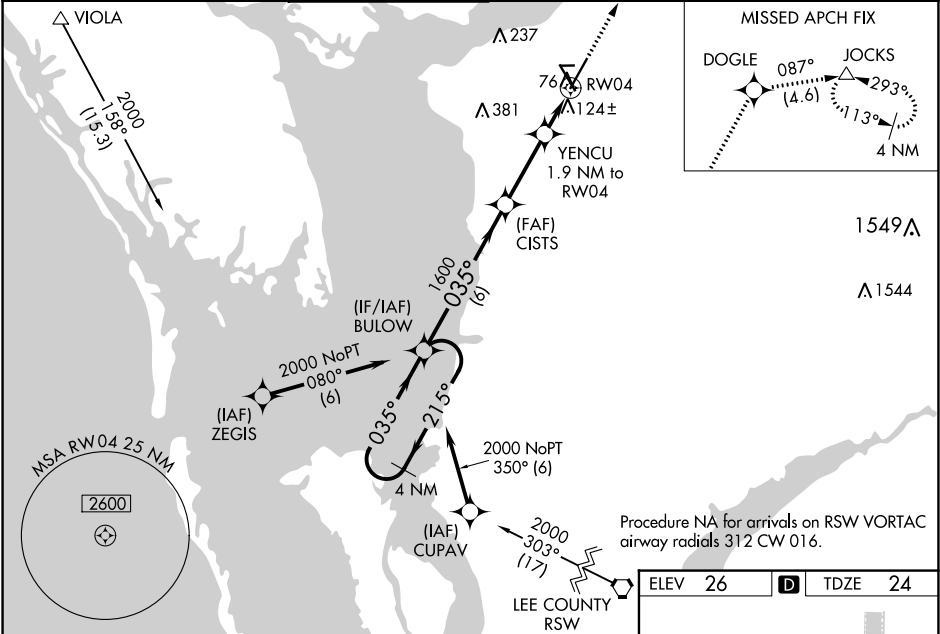

4 NM Holding Pattern		BULOW	CISTS	YENCU	JOCKS
2000		215°	035°	087°	087°
GP 3.00° TCH 50			1600	1.9 NM to RW04	1 NM to RW04
		6 NM	2.9 NM	0.9 NM	1 NM
CATEGORY	A	B	C	D	
LPV DA	224-¾ 200 (200-¾)				
LNAV/VNAV DA	393-1 369 (400-1)				
LNAV MDA	400-1 376 (400-1)				
CIRCLING	460-1 434 (500-1)	580-1 554 (600-1)	600-1½ 574 (600-1½)	740-2¼ 714 (800-2¼)	

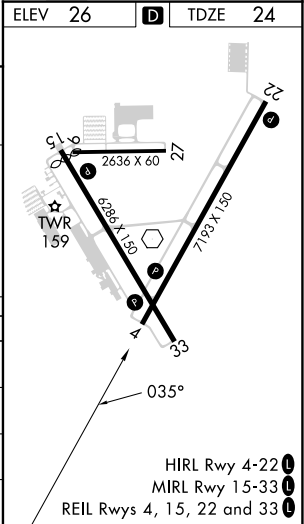


VOR PGD 110.2	APP CRS 025°	Rwy Idg TDZE Apt Elev 7193 24 26	VOR RWY 4 PUNTA GORDA (PGD)	
-------------------------	------------------------	--	--------------------------------	--

⚠

When local altimeter setting not received, use Page Fld altimeter setting and increase all MDA 60 feet; increase S-4 Cats C/D and Circling Cat C visibility ⅓ mile and Circling Cat D visibility ¼ mile.

MISSED APPROACH: Climb to 1100 then climbing left turn to 1600 direct PGD VOR and hold.

ATIS ★ 135.675	FORT MYERS APP CON ★ 127.05 306.2	PUNTA GORDA TOWER ★ 121.0 (CTAF) 0	GND CON 119.55	CLNC DEL 119.55	CLNC DEL 127.05 (When twr closed)	UNICOM 122.975
--------------------------	---	--	--------------------------	---------------------------	--	--------------------------

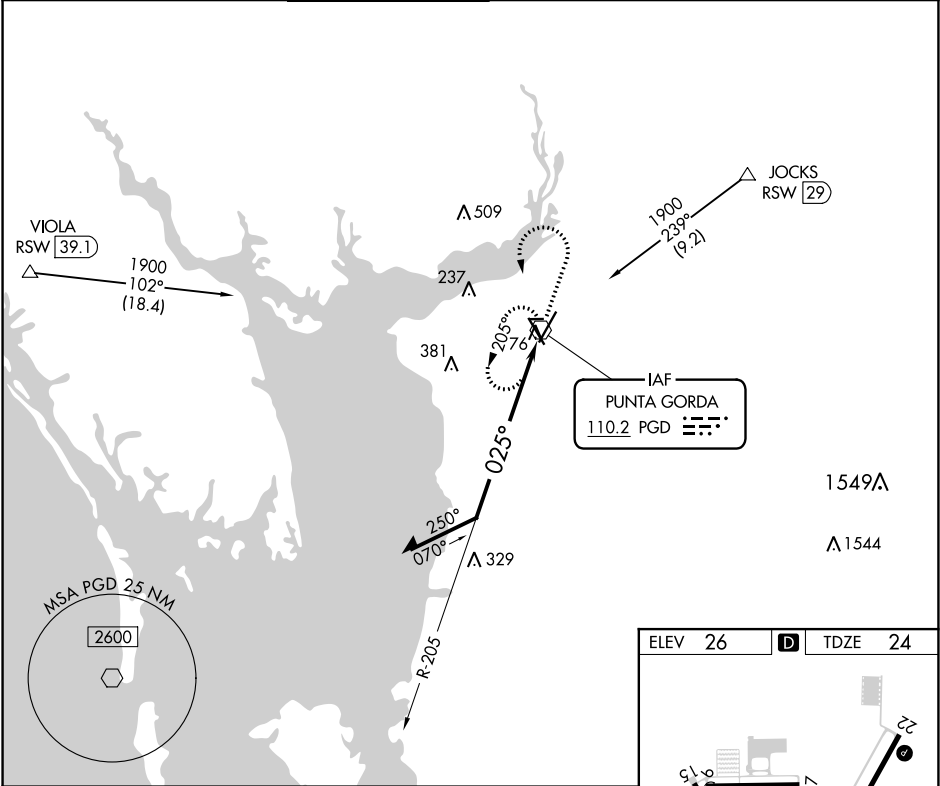

Remain within 10 NM

PGD VOR

1600

205°

025°

1100

1600

PGD

159

2636 X 60

6286 X 150

7193 X 150

025°

HIRL Rwy 4-22 0

MIRL Rwy 15-33 0

REIL Rwy 4, 15, 22 and 33 0

CATEGORY	A	B	C	D
S-4	680-1	656 (700-1)	680-1⅞	656 (700-1⅞)
CIRCLING	680-1	654 (700-1)	680-1⅞	740-2¼
			654 (700-1⅞)	714 (800-2¼)