



RNAV (GPS) RWY 10
WILLIAMSON/SODUS (SDC)

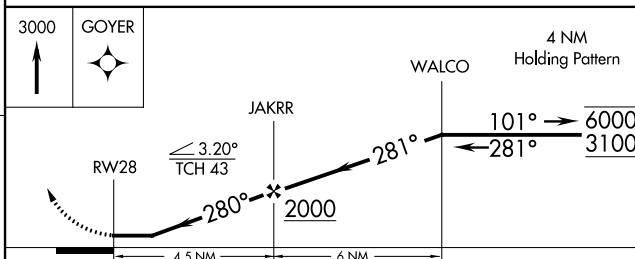

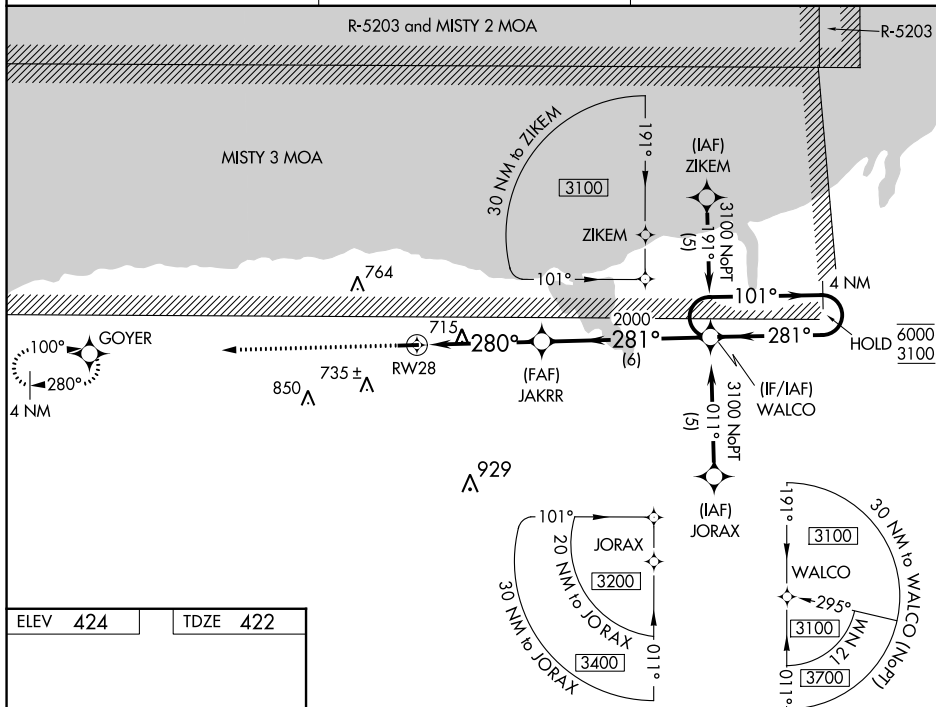
MISSED APPROACH: Climb to 3100 direct WALCO and hold. Continue climb-in-hold to 3100.

UNICOM
122.8 (CTAF) **L**

RNAV (GPS) RWY 28
WILLIAMSON/SODUS (SDC)

T Procedure NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA. When
A local altimeter setting not received, use Rochester altimeter setting and increase all
MDAs 80 feet and LNAV visibility Cat C $\frac{1}{8}$ SM, and Circling visibility Cat C $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 3000 direct
GOYER and hold.

UNICOM
122.8 (CTAF) **L**

CATEGORY	A	B	C	D
LNNAV MDA	980-1	558 (600-1)	980-1 $\frac{15}{8}$ 558 (600-1 $\frac{5}{8}$)	NA
 CIRCLING	1000-1 576 (600-1)	1020-1 596 (600-1)	1120-2 696 (700-2)	NA