LOC/DME I-VJI	APP CRS	Rwy Idg	4471
108.3	241°	TDZE	2087
Chan 20		Apt Elev	2087

LOC RWY 24
VIRGINIA HIGHLANDS (VJI)

Inop table does not apply. GPS required. Cat D Straight-in minima NA when using Tri-Cities altimeter setting. When local altimeter setting not received; use Tri-Cities altimeter setting and increase all MDA 140 feet; and increase S-24 Cat A and B and Circling Cat B visibility ¼ mile, and S-24 Cat C and Circling Cat C visibility ½ mile. Increase BUNTE fix minimums S-24 Cat C visibility ⅜ mile, Circling Cats A and B visibility ¼ mile, and Circling Cat C visibility ½ mile. Helicopter visibility reduction below 1 SM NA.

ODALS

MISSED APPROACH: Climb to 3200 then climbing left turn to 4300 direct AKQON INT and hold.

AWOS-3	TRI-CITY APP CON ★	UNICOM
128.125	125.25 349.0	122.8 (CTAF) L

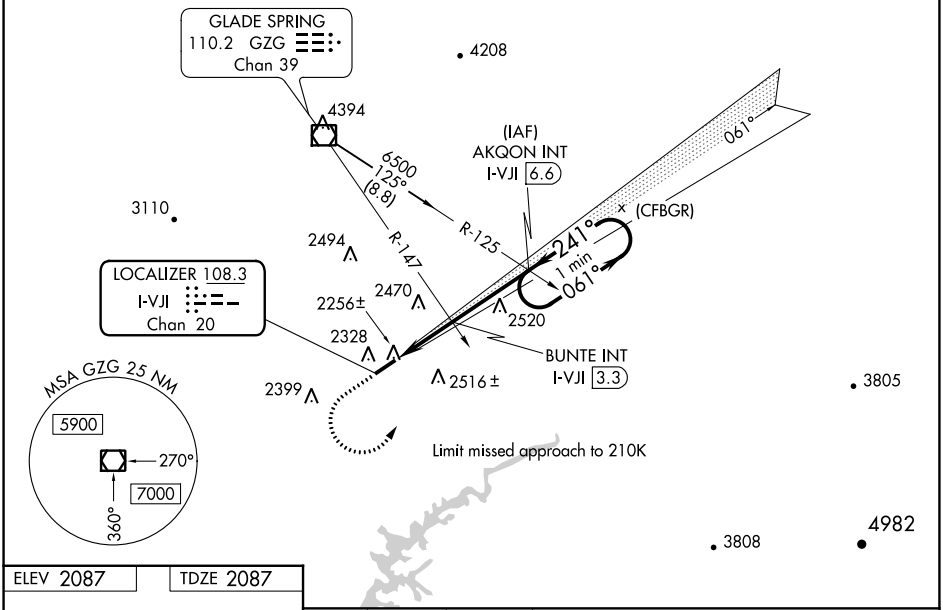

ELEV 2087 TDZE 2087



MIRL Rwy 6-24 L
REIL Rwy 24 L

FAF to MAP 5.8 NM

Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

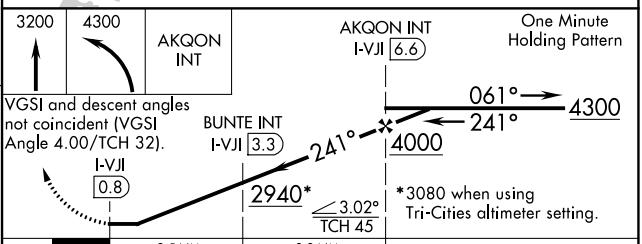

CATEGORY	A	B	C	D
S-24	2940-1 853 (900-1)	2940-1¼ 853 (900-1¼)	2940-2½	853 (900-2½)
C CIRCLING	2940-1¼ 853 (900-1¼)		2940-2½ 853 (900-2½)	3080-3 993 (1000-3)
BUNTE FIX MINIMUMS				
S-24	2520-1 433 (500-1)		2520-1¼	433 (500-1¼)
C CIRCLING	2860-1 773 (800-1)		2900-2½ 813 (900-2½)	3080-3 993 (1000-3)

NE-3, 22 FEB 2024 to 21 MAR 2024
NE-3, 22 FEB 2024 to 21 MAR 2024

WAAS CH 77827 W24A | APP CRS 241° | Rwy Idg 4471 TDZE 2087 Apt Elev 2087

RNAV (GPS) RWY 24
VIRGINIA HIGHLANDS (VJI)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 53°C (127°F). DME/DME RNP-0.3 NA. Inop table does not apply to LPV.

ODALS

MISSED APPROACH: Climb to 2900 then climbing left turn to 5100 direct KURRU and hold.

AWOS-3	TRI-CITY APP CON ★	UNICOM
128.125	125.25 349.0	122.8 (CTAF) L

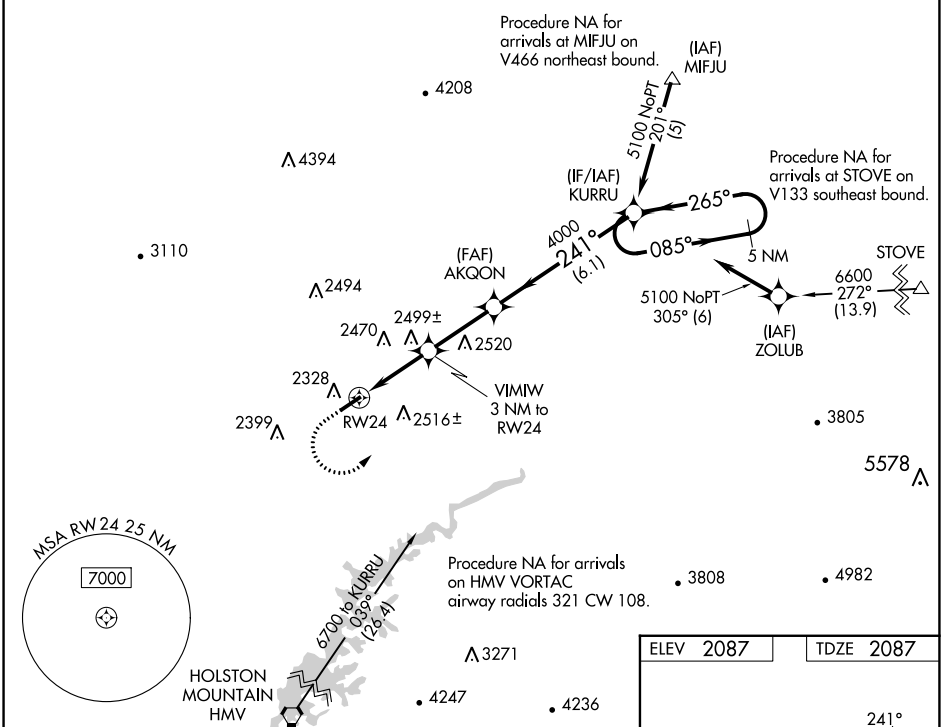

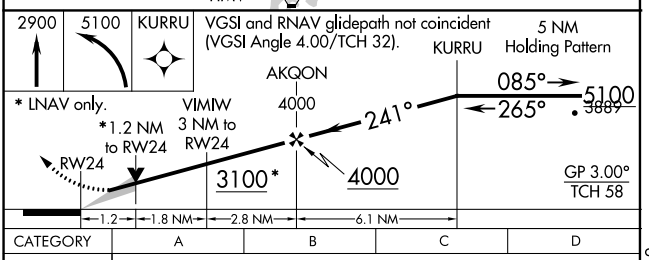

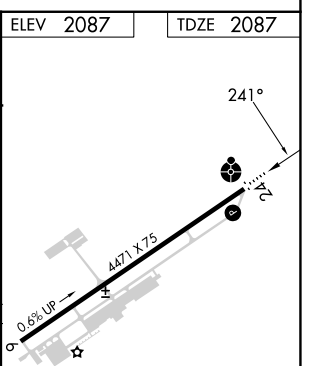

CATEGORY	A	B	C	D
LPV DA	2337-1 250 (300-1)			
LNAV/VNAV DA	2525-1¼ 438 (500-1¼)			
LNAV MDA	2760-1 673 (700-1)		2760-1¾ 673 (700-1¾)	
C CIRCLING	2860-1 773 (800-1)		2860-2¼ 773 (800-2¼)	3080-3 993 (1000-3)

MIRL Rwy 6-24 L
REIL Rwy 24 L

NE-3, 22 FEB 2024 to 21 MAR 2024
NE-3, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 6

VIRGINIA HIGHLANDS (VJI)

WAAS CH 82411 W06A	APP CRS 061°	Rwy Idg 4471 TDZE 2068 Apt Elev 2087

RNP APCH.

Rwy 6 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.

MISSED APPROACH: Climb to 7300 direct KURRU and hold, continue climb-in-hold to 7300.

AWOS-3	TRI-CITY APP CON ★	UNICOM
128.125	125.25 349.0	122.8 (CTAF) L

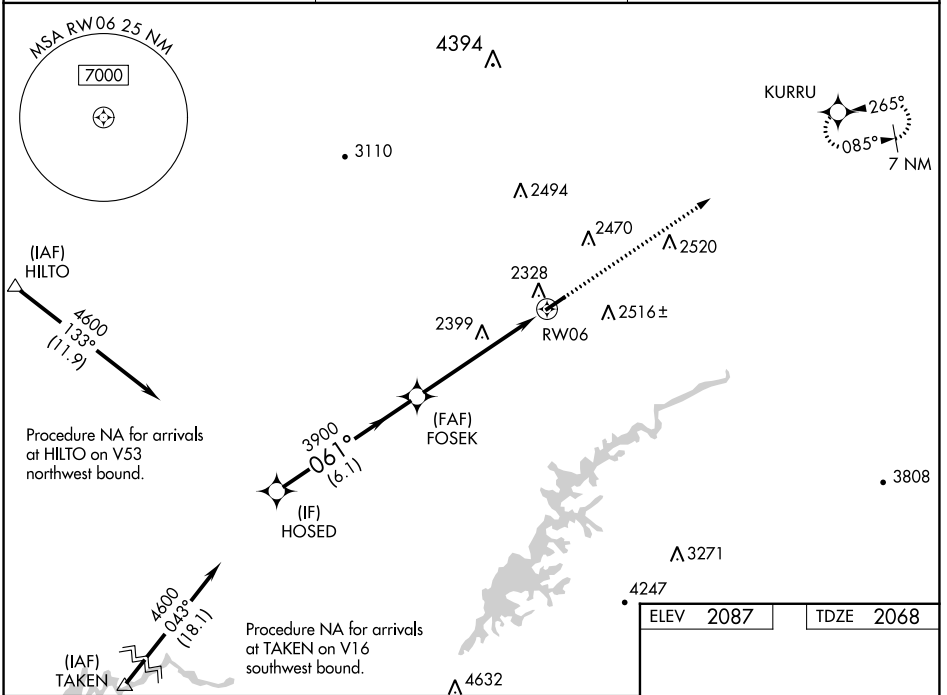

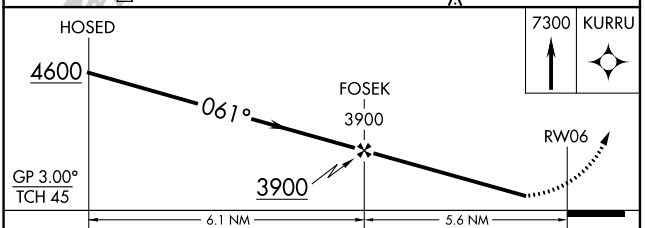

CATEGORY	A	B	C	D
LPV DA	2443-1¼ 375 (400-1¼)			
LNAV/VNAV DA	2489-1¼ 421 (500-1¼)			
LNAV MDA	2660-1 592 (600-1)		2660-1¾ 592 (600-1¾)	
C CIRCLING	2860-1 773 (800-1)		2860-2¼ 773 (800-2¼)	3080-3 993 (1000-3)

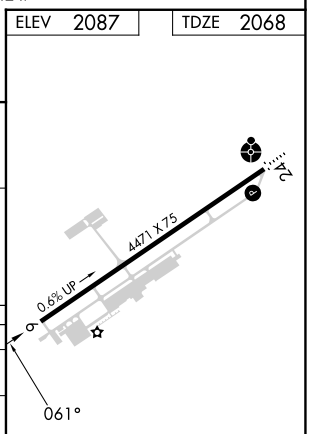

NE-3, 22 FEB 2024 to 21 MAR 2024
NE-3, 22 FEB 2024 to 21 MAR 2024