

APP CRS	Rwy Idg	3000
360°	TDZE	137
	Apt Elev	137

RNAV (GPS) RWY 36

RULEVILLE-DREW (M37)


▼

▲ NA

DME/DME RNP-0.3 NA. Use Cleveland altimeter setting; when not received, use Greenwood altimeter setting and increase all MDA 40 feet; increase LNAV Cat C visibility 1⁄8 mile and Circling Cat C visibility 1⁄4 mile. Procedure NA at night. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 2300 direct COOMB and hold.

MEMPHIS CENTER	CTAF
135.875 269.35	122.9 0

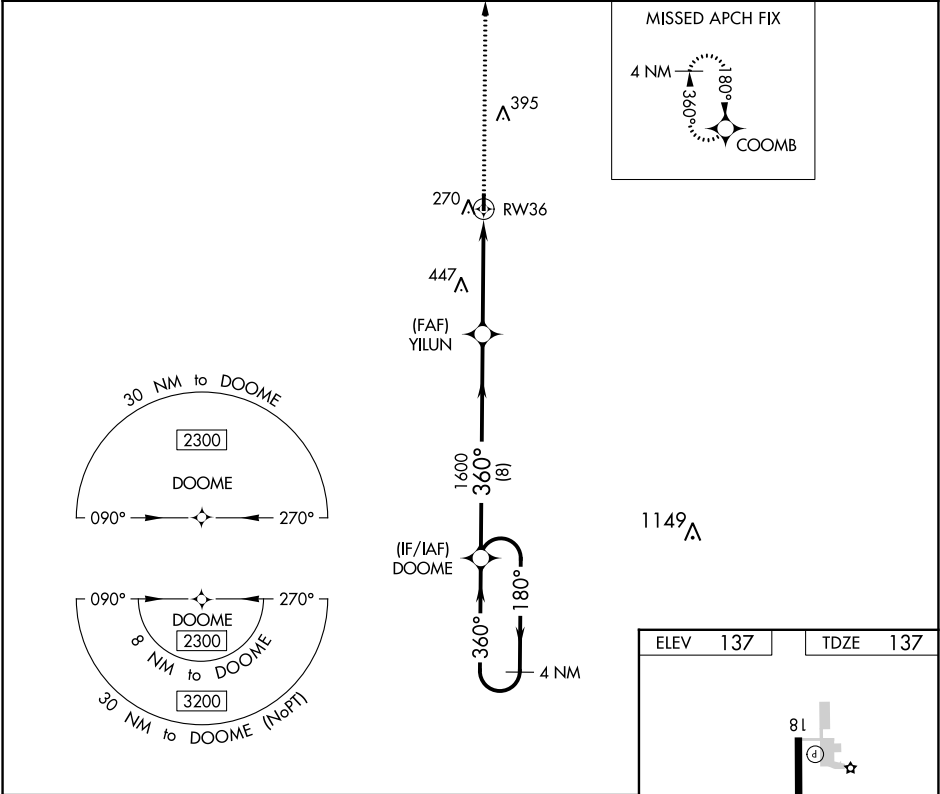

4 NM Holding Pattern

2300

180°

360°

DOOME

360°

YILUN

1600

3.00° TCH 40

RW36

8 NM

4.5 NM

2300

COOMB

CATEGORY	A	B	C	D
LNAV MDA	620-1	483 (500-1)	620-1 3⁄8 483 (500-1 3⁄8)	NA
CIRCLING	620-1 483 (500-1)	720-1 583 (600-1)	780-1 3⁄4 643 (700-1 3⁄4)	NA

ELEV 137

TDZE 137

81

3000 X 60

36

360° to RW36

MIRL Rwy 18-36 0

SC-4, 22 FEB 2024 to 21 MAR 2024

SC-4, 22 FEB 2024 to 21 MAR 2024