

LOC/DME I-ARK

110.95

Chan 46(Y)

APP CRS

185°

Rwy Idg

9001

TDZE

90

Apt Elev

96

ILS RWY 17L (CAT II & III)


ORLANDO INTL (MCO)

RNAV 1-DME/DME/IRU or GPS or RADAR required for procedure entry. DME or RADAR required.

ALSF-2

MISSED APPROACH: Climb to 500 then climbing left turn to 3000 on heading 100° and ORL VORTAC R-140 to PRESK INT/ORL 16.2 DME and hold, continue climb-in-hold to 3000.

D-ATIS	ORLANDO APP CON	ORLANDO TOWER	GND CON	CLNC DEL	CPDLC
ARR 121.25	124.8 307.0	118.45 253.5 (Rwys 17L-35R, 17R-35L)	126.4 (East)	134.7	
DEP 120.525		124.3 253.5 (Rwys 18L-36R, 18R-36L)	121.8 (West)	341.7	

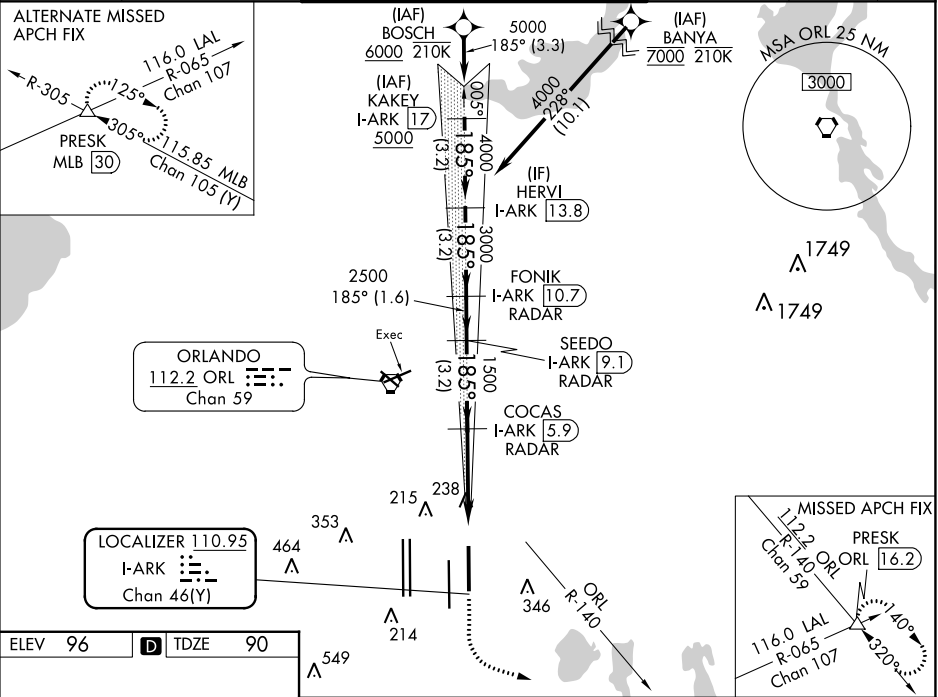

ELEV 96

D

TDZE 90

GS 3.00°

TCH 55

500

3000

ORL R-140

PRESK

3.3

3.2 NM

3.2 NM

1.6 NM

3.2 NM

4.3 NM

10.40

CATEGORY	A	B	C	D
S-ILS 17L	CAT II	RA 101/12	100 DA 190	
S-ILS 17L		CAT III	RVR 06	

CATEGORY II & III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED