

WAAS
CH **86903**
W26A

APP CRS
272°

Rwy Idg **8600**
TDZE **9**
Apt Elev **9**

RNAV (GPS) RWY 26R


MIAMI INTL (MIA)

RNP APCH - GPS.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.
Use of FD or AP required during simultaneous operations.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 9°C or above 54°C.

MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct BRBRA and hold, continue climb-in-hold to 4000.

D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON	CINC DEL	CPDLC
ARR 119.15 DEP 133.675	124.85 322.3	118.3 256.9	121.8 (Rwys 8L/R, 12, 26L/R) 127.5 (Rwys 9, 27, 30)	348.6 135.35	

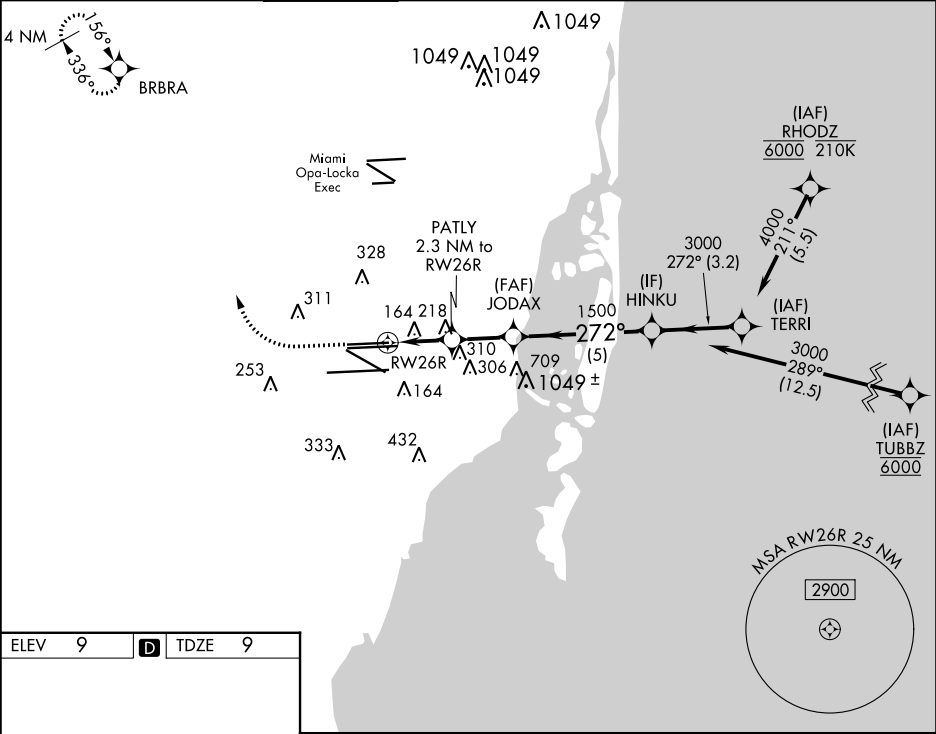

ELEV 9	D	TDZE 9
---------------	----------	---------------

