

WAAS CH 53609 W26A	APP CRS 259°	Rwy Idg 7815 TDZE 548 Apt Elev 565
--	------------------------	---

RNAV (GPS) RWY 26

EASTERN WV RGNL/SHEPHERD FLD (MRB)

RNP APCH.

A Baro-VNAV NA when using Hagerstown altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). VDP NA when using Hagerstown altimeter setting. When local altimeter setting not received, use Hagerstown altimeter setting and increase all DA 70 feet and all MDA 80 feet, increase LNAV/VNAV all Cats, LNAV Cats C, D, E and Circling Cat C and D visibility ¼ mile. For nonoperative MALSR increase LPV Cat E visibility to ¾ mile, LNAV/VNAV Cat E to 2 ¼ mile, LNAV Cat E to 1 ½ mile. For nonoperative MALSR when using Hagerstown altimeter setting increase LPV all Cats visibility to 1 mile, LNAV/VNAV Cat E visibility to 2 ½ mile and LNAV Cat E visibility to 1 ¾ mile.


MALSR




MISSED APPROACH:
Climb to 4100 direct
JOSRU and hold,
continue climb-in-hold
to 4100.

ASOS 119.925	POTOMAC APP CON 126.825 239.025	MARTINSBURG TOWER ★ 124.3 (CTAF) 0 233.7	GND CON 121.8 257.65	CLNC DEL 121.8 257.65	CLNC DEL 132.075 269.075 (When twr closed)
-----------------	------------------------------------	---	-------------------------	--------------------------	--

MISSED APRCH FIX

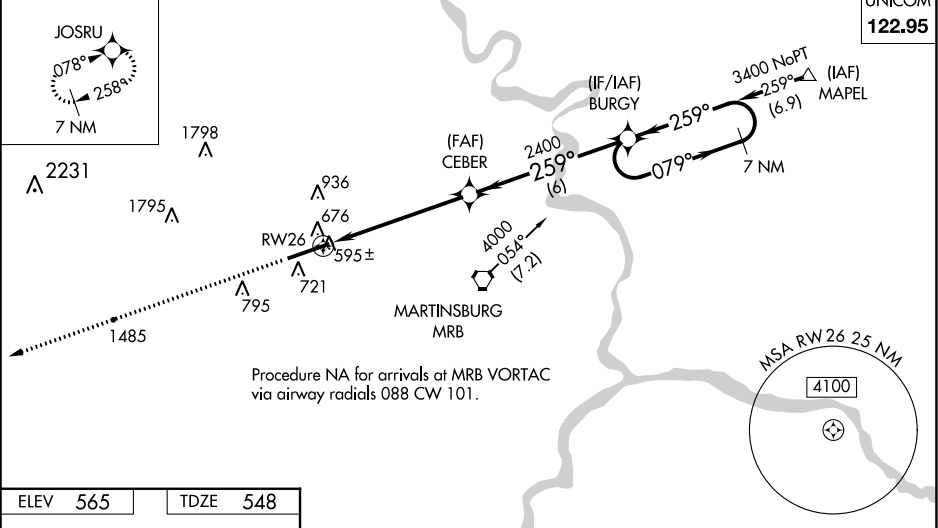

ELEV 565		TDZE 548
----------	--	----------

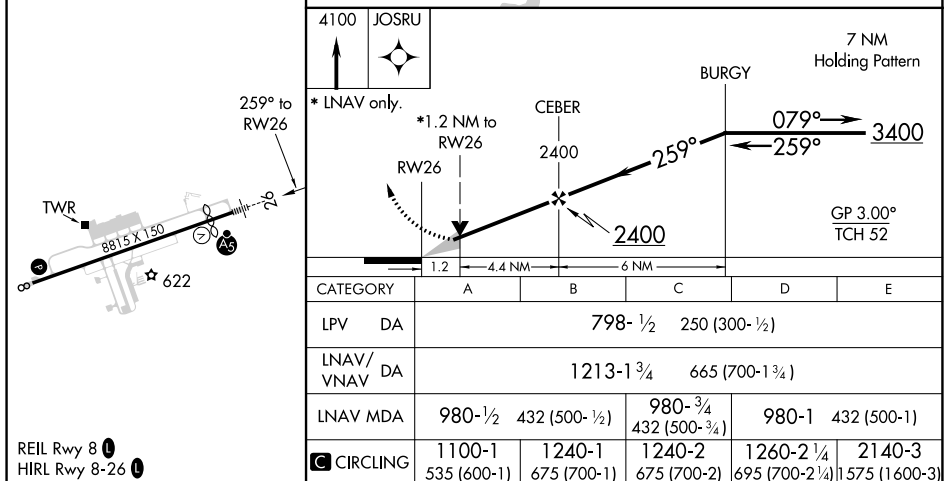

CATEGORY	A	B	C	D	E
LPV DA	798- 1/2 250 (300- 1/2)				
RNAV/ VNAV DA	1213-1 3/4 665 (700-1 3/4)				
RNAV MDA	980-1/2 432 (500- 1/2)	980- 3/4 432 (500- 3/4)	980-1 432 (500-1)		
C CIRCLING	1100-1 535 (600-1)	1240-1 675 (700-1)	1240-2 675 (700-2)	1260-2 1/4 695 (700-2 1/4)	2140-3 1575 (1600-3)

RNAV (GPS) RWY 26