

LOC I-MWO	APP CRS	Rwy Idg	5801
111.1	233°	TDZE	650
		Apt Elev	651

LOC RWY 23

MIDDLETOWN RGNL/HOOK FLD (MWO)

ADF required.


▼

NA

Circling Rwy 5 NA at night. Circling NA to Rwys 8 and 26. Rwy 23 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Dayton/Wright Brothers altimeter setting and increase all MDAs 80 feet and S-23 Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 2600 then climbing left turn to 3000 direct MW LOM and hold.

AWOS-3PT	COLUMBUS APP CON	UNICOM
120.025	118.85 269.275	123.0 (CTAF) 0

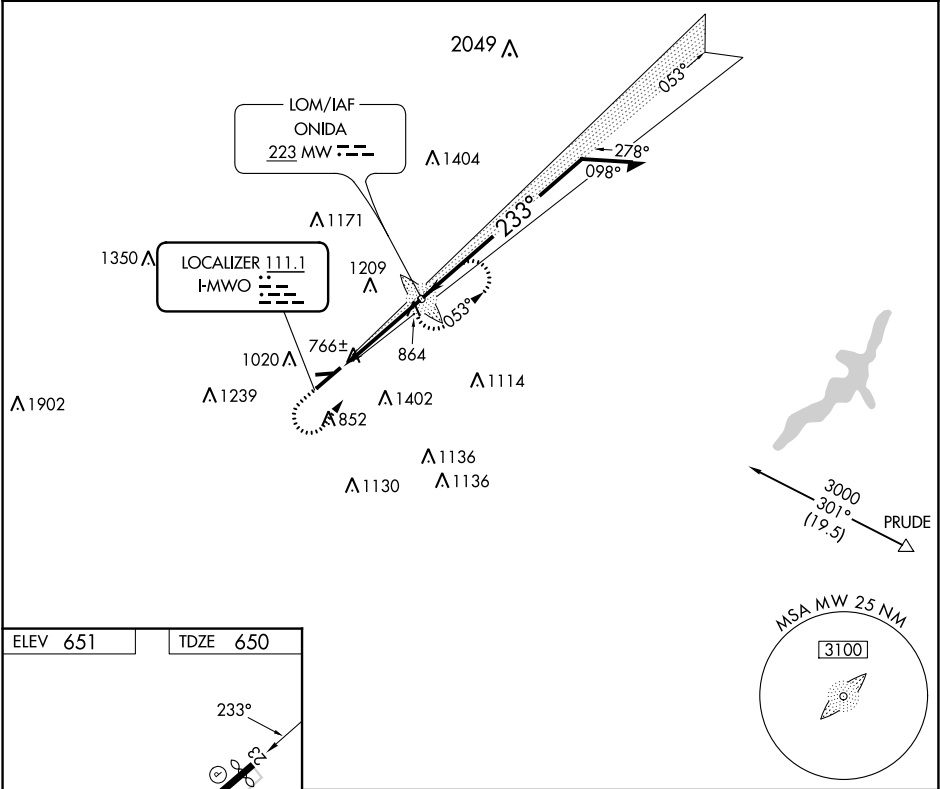

ELEV 651 TDZE 650

MIRL Rwy 5-23 0
REL Rwys 5 and 23 0

FAF to MAP 3.9 NM

Knots	60	90	120	150	180
Min:Sec	3:54	2:36	1:57	1:34	1:18

2600 3000 MW

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 26).

3.14° TCH 45

3.9 NM

CATEGORY	A	B	C	D
S-23	1140-1 490 (500-1)	1140-1 490 (500-1)	1140-1 490 (500-1)	1140-1 490 (500-1)
CIRCLING	1480-1 829 (900-1)	1720-3 1069 (1100-3)	1940-3 1289 (1300-3)	1940-3 1289 (1300-3)