



APP CRS	Rwy Idg	9800
176°	TDZE	1282
	Apt Elev	1296


RNAV (RNP) Z RWY 17R

WILL ROGERS WORLD (OKC)

RNP AR APCH.	For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. ASR For inop ALS, increase RNP 0.20 all Cnts visibility to RVR 4500 and RNP 0.30 all Cnts visibility to RVR 6000. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations.	MALSR 	MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct JESKE and hold.
--------------	--	-----------	--

D-ATIS 125.85	OKE CITY APP CON 124.6 266.8	ROGERS TOWER 119.35 269.45	GND CON 121.9 348.6	CLNC DEL 124.35
------------------	---------------------------------	-------------------------------	------------------------	--------------------

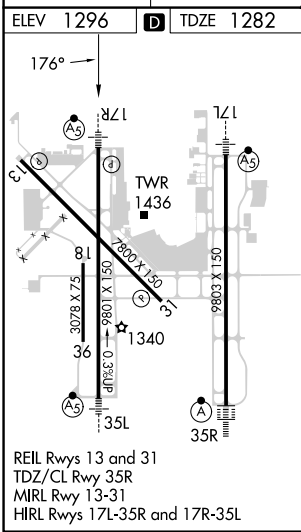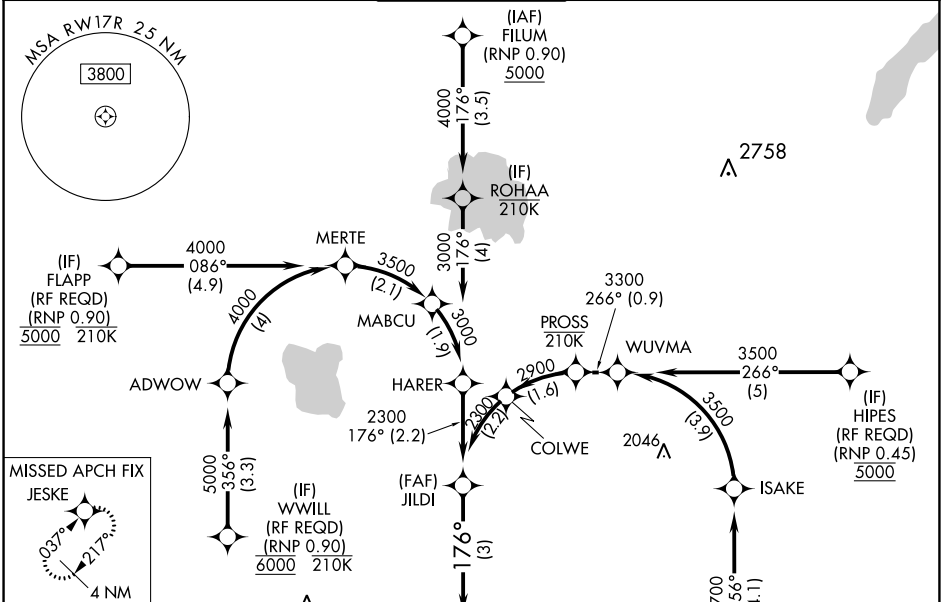

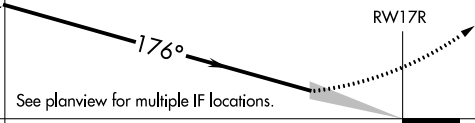VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 60).						
JILDI 2300 2300 GP 3.00° TCH 55				RW17R 		
3 NM						
CATEGORY	A	B	C	D		
RNP 0.20 DA	1559/24		277 (300-½)			
RNP 0.30 DA	1677/35		395 (400-⅝)			
AUTHORIZATION REQUIRED						