

LOC I-PAH	APP CRS	Rwy Idg	6500
108.5	045°	TDZE	411
		Apt Elev	411



ILS or LOC RWY 5
BARKLEY RGNL (PAH)

⚠ When local altimeter setting not received, use Mayfield altimeter setting and increase DA to 672, and all MDA 80 feet. Increase S-LOC 5 Cat C, D visibility 1/8 SM. For inop ALS when using Mayfield altimeter setting, increase S-ILS 5 visibility to 3/8 SM, all Cats.

MALSR

MISSED APPROACH: Climb to 1100 then climbing right turn to 2100 direct CNG VOR/DME and hold.

ASOS 118.375	MEMPHIS CENTER 133.65 292.15	PADUCAH TOWER ★ 119.6 (CTAF) 306.9	GND CON 121.7 306.9	UNICOM 122.95
-----------------	---------------------------------	---------------------------------------	------------------------	------------------

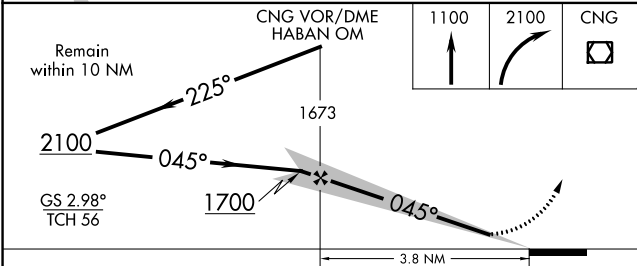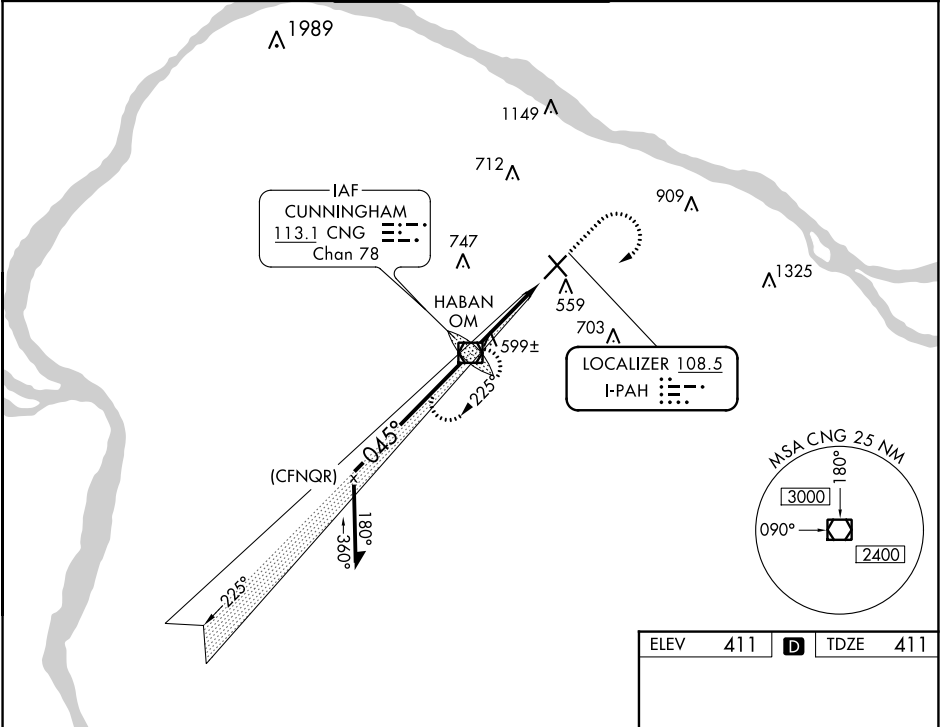

ELEV	411	D	TDZE	411
HIRL Rwy 5-23 1				
MIRL Rwy 14-32 1				
REIL Rwy 23 and 32 1				
FAF to MAP 3.8 NM				
Knots	60	90	120	150
Min:Sec	3:48	2:32	1:54	1:31