

WAAS CH 86901 W35A	APP CRS 353°	Rwy ldg 6014 TDZE 1350 Apt Elev 1354
--	------------------------	---

RNAV (GPS) RWY 35L

CLARENCE E PAGE MUNI (R/C/E)


⚠

⚠

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Wiley Post altimeter setting and increase all DA 29 feet and all MDA 40 feet and increase LPV all Cnts visibility ¼ mile. VDP NA when using Wiley Post altimeter setting.

MISSED APPROACH: Climb to 3800 direct CATKI and hold.

AWOS-3 125.05	OKE CITY APP CON 124.6 266.8	UNICOM 123.0 (CTAF) 0
-------------------------	--	---------------------------------

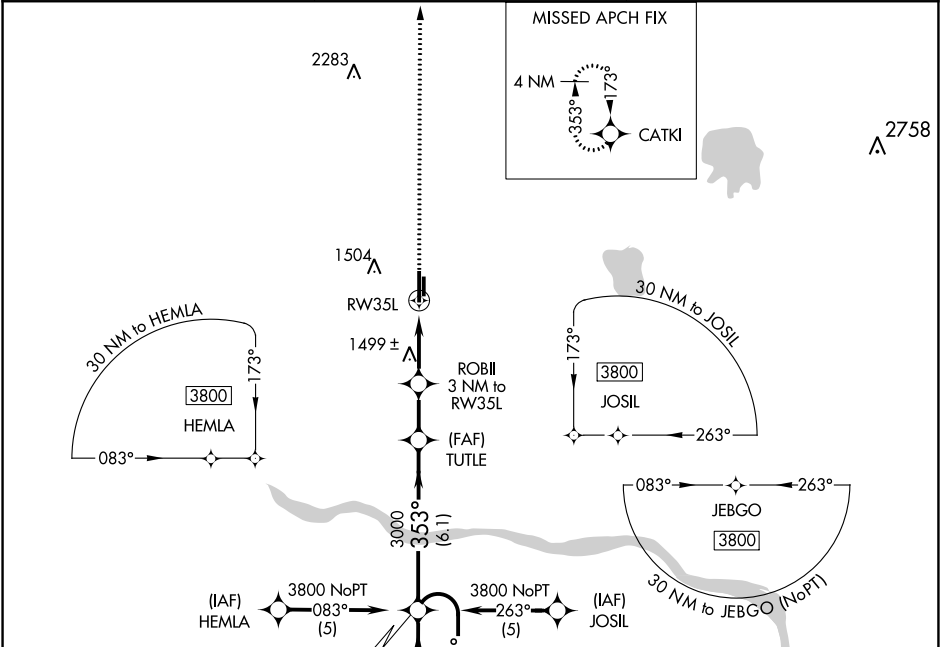

ELEV 1354

TDZE 1350

3800

CATKI

*LNAV only

ROBII 3 NM to RW35L

TUTLE

JEBGO

4 NM Holding Pattern

3800

GP 3.00° TCH 41

1.2 NM

1.8 NM

2 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA	1651-1	301 (300-1)		NA
LNAV MDA	1760-1	410 (500-1)	1760-1¼ 410 (500-1¼)	NA
CIRCLING	1800-1 446 (500-1)	1820-1 466 (500-1)	1840-1½ 486 (500-1½)	NA

6014 X 100

17L

35L

353°

MIRL Rwy 17L-35R 0

HIRL Rwy 17R-35L 0