


LOC/DME I-RFD	APP CRS	Rwy Idg	8199
109.3	008°	TDZE	729
Chan 30		Apt Elev	742

ILS or LOC RWY 1

CHICAGO/ROCKFORD INTL (RFD)

DME or RADAR required.		MALSR	MISSED APPROACH: Climb to 2600 on I-RFD localizer N course (008°) to TODDY/4.6 DME/RADAR and hold, continue climb-in-hold to 2600.
ASR	Inop table does not apply to S-ILS. For inop ALS, increase S-LOC 1 Cat C/D visibility to RVR 5500.		

ATIS	ROCKFORD APP CON	ROCKFORD TOWER	GND CON	CLNC DEL
127.6	121.0 327.0	118.1 290.375	121.9 290.375	119.25

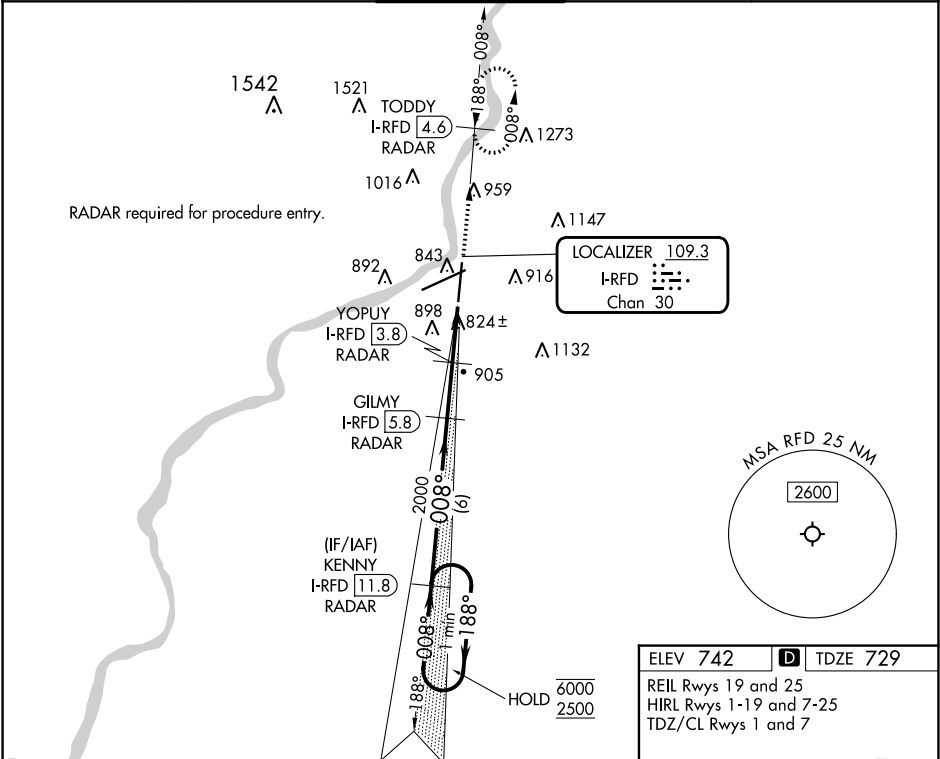

	KENNY I-RFD 11.8 RADAR		GILMY I-RFD 5.8 RADAR	YOPUY I-RFD 3.8 RADAR	2600 I-RFD N crs (008°)	TODDY I-RFD 4.6 RADAR
	6000 ← 188°		2500 ← 008°		2000	I-RFD 2.6
	2000		1400			I-RFD 1.6
	6 NM		2 NM		1.2 NM	
CATEGORY	A	B	C	D		
S-ILS 1	929/18		200 (200-½)			
S-LOC 1	1080/24	351 (400-½)	1080/30	351 (400-⅝)		
CIRCLING	1220-1 478 (500-1)	1280-1 538 (600-1)	1320-1½ 578 (600-1½)	1460-2¼ 718 (800-2¼)		

ELEV 742	TDZE 729
REIL Rwy 19 and 25	
HIRL Rwy 1-19 and 7-25	
TDZ/CL Rwy 1 and 7	
FAF to MAP 4.2 NM	
Knots	60 90 120 150 180
Min:Sec	4:12 2:48 2:06 1:41 1:24