

LOC I-BNE 110.7	APP CRS 337°	Rwy Idg TDZE 161 Apt Elev 168
---------------------------	------------------------	---

ILS or LOC RWY 34
RICHMOND INTL (RIC)

DME required for LOC only.





For inop ALS, increase S-ILS 34 Cat E visibility to RVR 4000 and S-LOC 34 Cat E visibility to 1% SM. DME from RIC VORTAC. DME use requires simultaneous reception of I-BNE and RIC DME.

ALSF-2



MISSED APPROACH: Climb to 800 then climbing right turn to 2000 on RIC VORTAC R-018 to EPICS INT/RIC 17.3 DME and hold.

ATIS 119.15 263.025	POTOMAC APP CON 126.4 282.375 (001°-185°) 126.75 307.2 (186°-360°)	RICHMOND TOWER 121.1 257.8	GND CON 121.9 348.6	CLNC DEL 127.55 348.6
-------------------------------	--	--------------------------------------	-------------------------------	---------------------------------

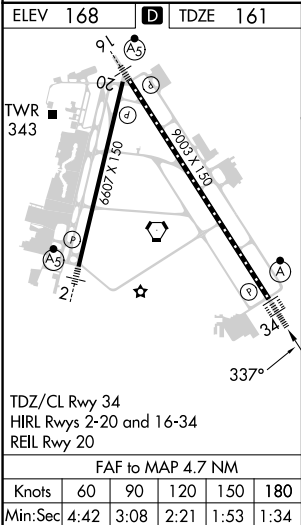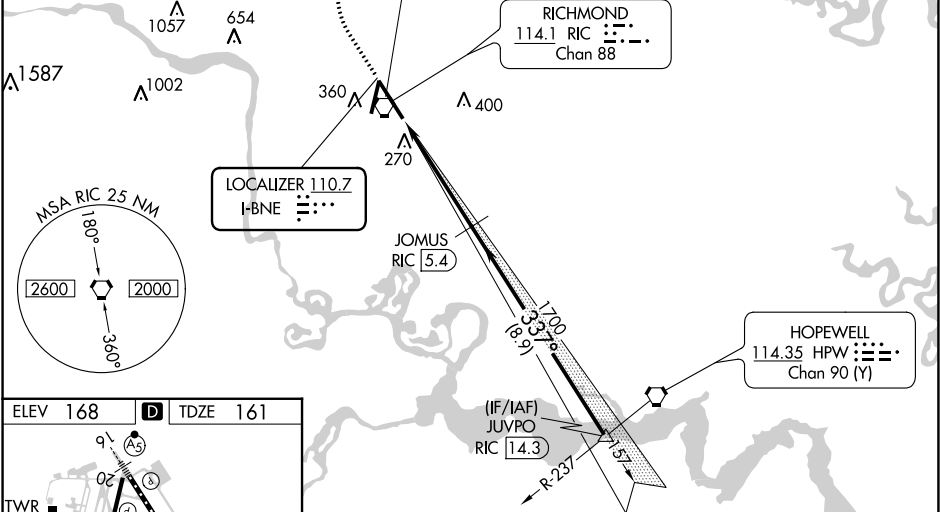

800	2000	EPICS	JOMUS	JUVPO	
↑	RIC R-018	△	RIC 5.4	RIC 14.3	
			1700	1700	
RIC 1.9			337°	1700	
VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 79).					
GS 3.00° TCH 54					
1.2 NM			3.5 NM	8.9 NM	
CATEGORY	A	B	C	D	E
S-ILS 34	361/18 200 (200-½)				
S-LOC 34	620/24	459 (500-½)	620/45	459 (500-¾)	
CIRCLING	660-1	492 (500-1)	700-1½ 532 (600-1½)	720-2 552 (600-2)	740-2 572 (600-2)