



APP CRS	Rwy Idg	7591
275°	TDZE	17
	Apt Elev	17


RNAV (RNP) Z RWY 27

SAN DIEGO INTL (SAN)

RNP AR APCH.	MALS	MISSED APPROACH: Climb to 2500 on track 275° to SARGS and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below 6°C or above 46°C. Straight-in Rwy 27 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For inop ALS, increase RNP 0.30 all Cats visibility to 2½ SM.	Ⓐ	

D-ATIS	SOCAL APP CON	LINDBERGH TOWER	GND CON	CLNC DEL	CPDLC
134.8	119.6 363.1 (WEST) 124.35 279.625 (EAST)	118.3 338.225	123.9	125.9	

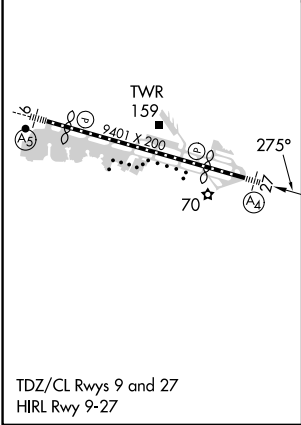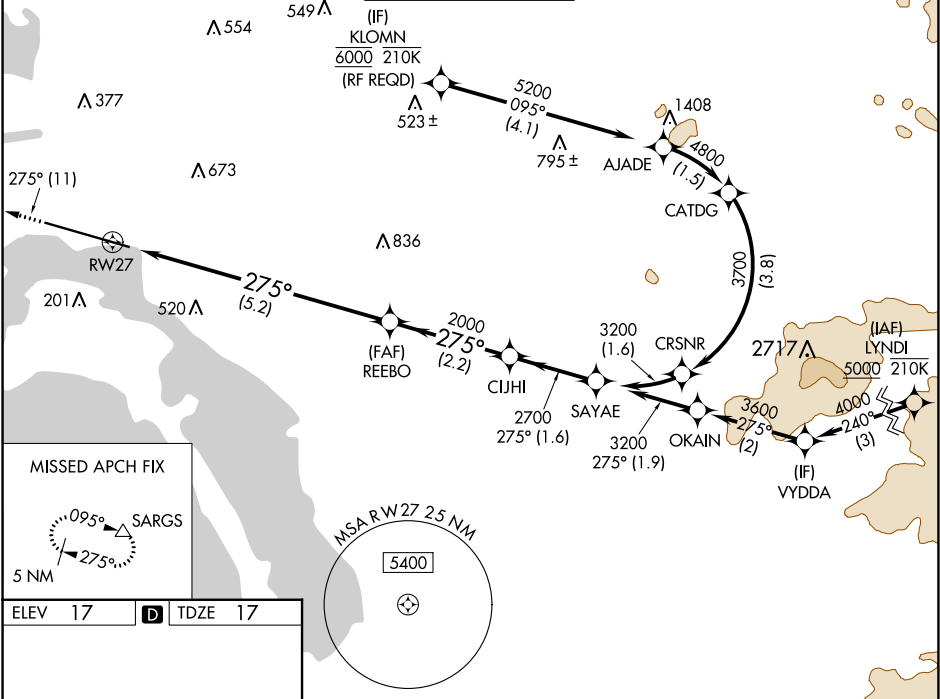

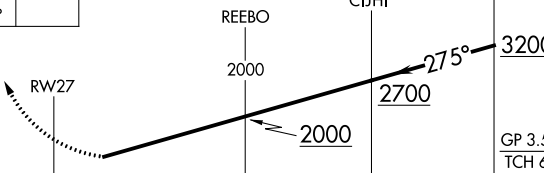2500	SARGS	See planview for multiple IF locations.			
↑ tr 275°	△				
					
CATEGORY	A	B	C	D	
RNP 0.11 DA	617-1½ 600 (600-1½)				
RNP 0.30 DA	778-2 761 (800-2)				
AUTHORIZATION REQUIRED					

SW-3, 22 FEB 2024 to 21 MAR 2024

SW-3, 22 FEB 2024 to 21 MAR 2024