LOC/DME I-SNU 110.3 Chan 40	APP CRS 170°	Rwy ldg 10000 TDZE 485 Apt Elev 501

ILS or LOC RWY 17R
LOUISVILLE MUHAMMAD ALI INTL (SDF)

RADAR required.

Circling Rwy 11 NA at night. Simultaneous approach authorized.
For inop ALS, increase S-LOC 17R Cat C/D visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 4000 on heading 170°, expect RADAR vectors.

D-ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON	CLNC DEL	CPDLC
118.725	132.075 327.0	124.2 257.8	121.7 348.6	126.1 275.8	

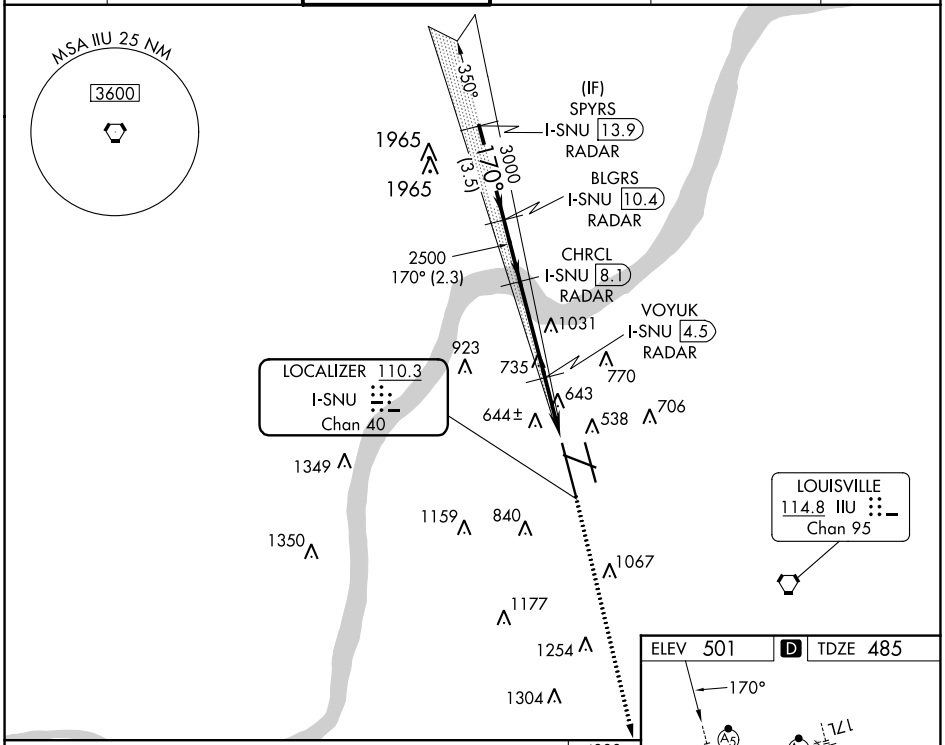

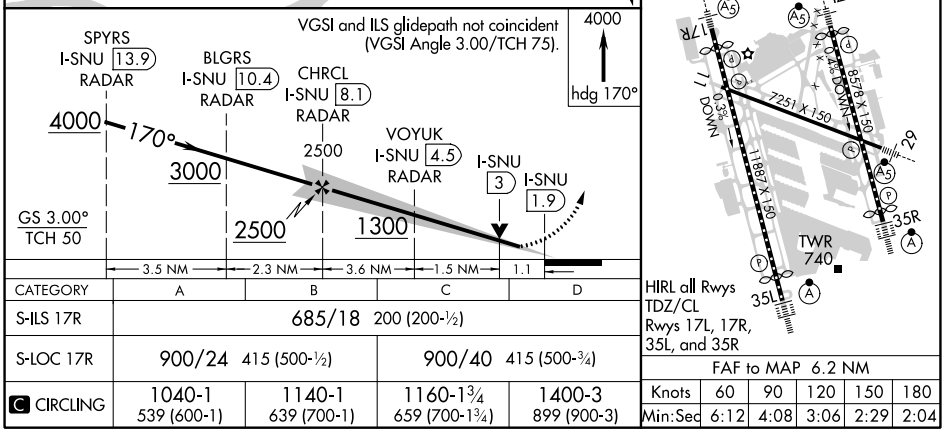

CATEGORY	A	B	C	D
S-ILS 17R	685/18 200 (200-½)			
S-LOC 17R	900/24 415 (500-½)		900/40 415 (500-¾)	
C CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)

FAF to MAP 6.2 NM

Knots	60	90	120	150	180
Min:Sec	6:12	4:08	3:06	2:29	2:04

SE-1, 22 FEB 2024 to 21 MAR 2024
SE-1, 22 FEB 2024 to 21 MAR 2024