

LOC/DME I-CJL	APP CRS	Rwy Idg	8500
110.75	164°	TDZE	415
Chan 44(Y)		Apt Elev	432

ILS or LOC RWY 16R

SEATTLE-TACOMA INTL (SEA)

DME or RADAR required. From GRIFY: RNAV 1-GPS required.

⚠


Simultaneous approach authorized with Rwy 16L and 16C. Simultaneous operations require use of vertical guidance, maintain last assigned altitude until established on glideslope.

ALSF-2

ⓘ

MISSED APPROACH: Climb to 900 then climb on heading 195° and on SEA VORTAC R-210 to cross TECEE/SEA 3 DME/RADAR at or below 2000 then climb to 5000 on SEA VORTAC R-210 to ZERLI/SEA 15 DME/RADAR and hold, continue climb-in-hold to 5000.

D-ATIS	SEATTLE APP CON	SEATTLE TOWER	GND CON	CLNC DEL	CPDLC
118.0	133.65 273.45	119.9 239.3 (Rwys 16L, 16C, 34C, 34R) 120.95 239.3 (Rwys 16R, 34L)	121.7	128.0	

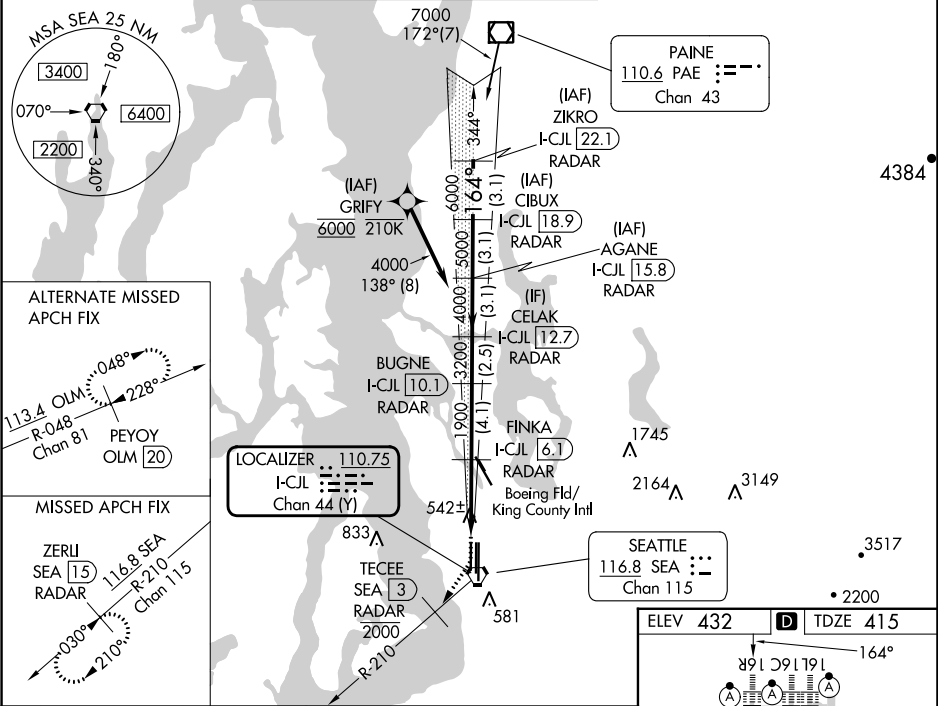

900	hdg 195°	TECEE	5000	ZERLI	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 69°).	ZIKRO
SEA	R-210	SEA [3]	SEA	SEA [15]		CIBUX
		2000				I-CJL [22.1]
*LOC only						RADAR
						AGANE I-CJL [18.9] RADAR
						CELAK I-CJL [12.7] RADAR
						FINKA I-CJL [6.1] RADAR
						BUGNE I-CJL [10.1] RADAR
						I-CJL [1.6] 2.6
						1900 3200 4000 5000 6000
						GS 3.00° TCH 55
						1 NM 3.5 NM 4.1 NM 2.5 NM 3.1 NM 3.1 NM 3.1 NM
CATEGORY	A	B	C	D		
S-ILS 16R	615/18 200 (200-½)					
S-LOC 16R	800/24	385 (400-½)	800/35	385 (400-¾)		
CIRCLING	1000-1	568 (600-1)	1000-1½	1000-2		
			568 (600-½)	568 (600-2)		

