

LOC/DME I-UAT 111.9 Chan 56	APP CRS 164°	Rwy Idg 12000 TDZE 4223 Apt Elev 4227
---	------------------------	--

ILS or LOC RWY 16R
SALT LAKE CITY INTL (SLC)

DME or RADAR required.




T Simultaneous approach authorized. For inop ALS, increase S-LOC 16R Cat C and D visibilities to RVR 5500.

ΔISE-2



MISSED APPROACH: Climb to 4800 then climbing right turn to 8100 on heading 300° and on TCH VORTAC R-249 to STACO INT/TCH 20 DME and hold.

D-ATIS 124.75 125.625	SALT LAKE CITY APP CON 125.7 284.6	SALT LAKE CITY TOWER 132.65 336.4	GND CON 123.775 348.6	CLNC DEL 127.3 379.975	CPDLC
--------------------------	---------------------------------------	--------------------------------------	--------------------------	---------------------------	-------

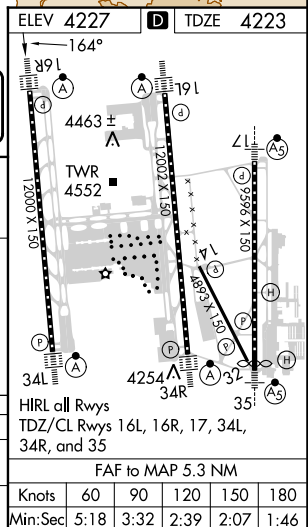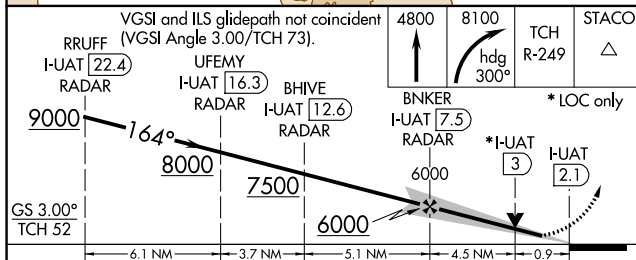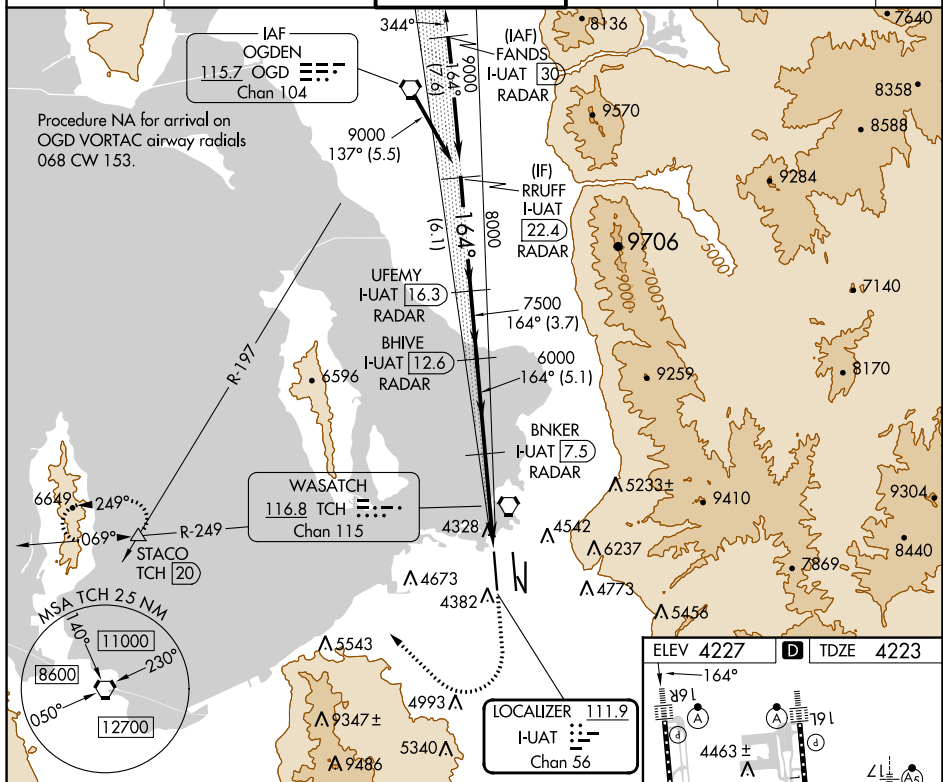

CATEGORY	A	B	C	D
S-ILS 16R	4423/18 200 (200-½)			
S-LOC 16R	4580/24 357 (400-½)		4580/30 357 (400-¾)	4580/40 357 (400-¾)