

WAAS CH 65835 W31A	APP CRS 312°	Rwy Idg TDZE 812 Apt Elev 827	4797
--	------------------------	---	-------------

RNAV (GPS) RWY 31

ROSECRANS MEML (STJ)


⚠

ASR/PAR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Kansas City Intl altimeter setting. Straight-In minimums NA at night. When local altimeter setting not received, use Kansas City Intl altimeter setting and increase all DA 97 feet and increase LPV visibility 1/8 mile and LNAV/VNAV visibility 3/8 mile all Cats; increase all MDA 100 feet and LNAV Cat C and D visibility 1/4 mile, and Circling Cat C 1/2 mile, Cat D 1/4 mile.

MISSED APPROACH:
Climb to 3100 direct OVEGE and hold.

ATIS 125.05	ST. JOSEPH APP CON ★ 120.35 360.8	ST. JOSEPH TOWER ★ 126.9(CTAF) 239.0	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

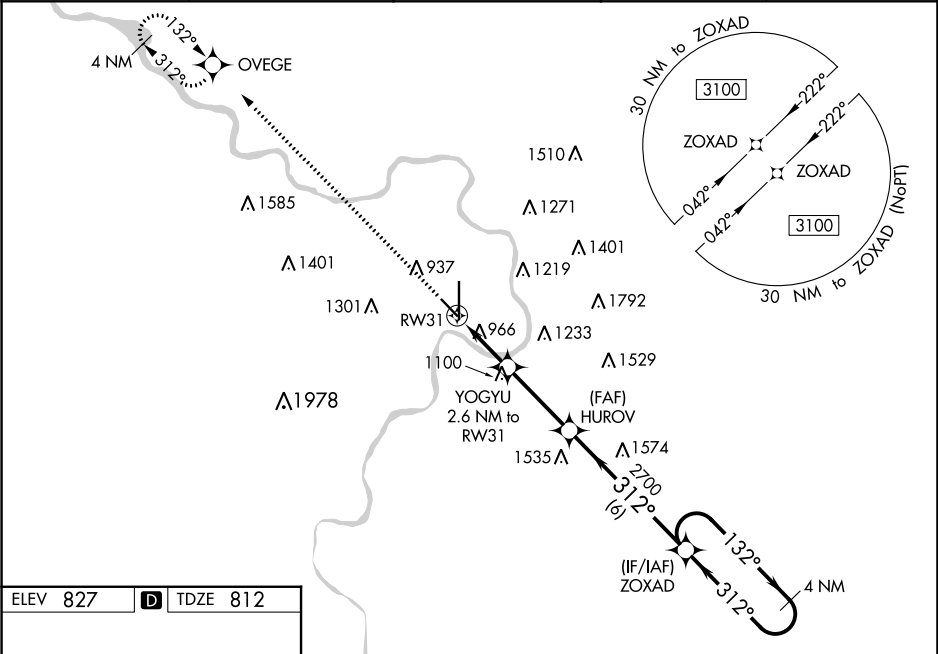

ELEV 827 D TDZE 812

⬆

OVEGE

YOGYU

2.6 NM to RWY 31

HUROV

2700

ZOXAD

4 NM Holding Pattern

3100

1700*

2700

3100

GP 3.00°

TCH 50

1.1 NM

1.5 NM

3.2 NM

6 NM

CATEGORY

A

B

C

D

LPV DA

1062-1

250 (300-1)

LNAV/VNAV DA

1255-1½

443 (500-1½)

LNAV MDA

1220-1

408 (400-1)

1220-1½

408 (400-1½)

CIRCLING

1400-1

573 (600-1)

1420-1

593 (600-1)

1620-2¼

793 (800-2¼)

1640-2¾

813 (900-2¾)

MIRL Rwy 13-31

HIRL Rwy 17-35

REIL Rwy 17 and 35