

LOC I-SUS	APP CRS	Rwy Idg	7414
110.55	079°	TDZE	462
		Apt Elev	463

ILS or LOC RWY 8R

SPIRIT OF ST LOUIS (SUS)


When local alimeter setting not received, use St Louis Lambert Intl alimeter setting and increase all DA to 719 feet, all MDA 60 feet, increase S-LOC 8R Cats C/D to RVR 5000 and Circling Cat C visibility ¼ mile. For inop MALSRR, increase S-LOC 8R Cats C/D visibility to RVR 6000. For inop MALSRR when using St Louis Lambert Intl alimeter setting, increase S-LOC 8R Cats C/D visibility to 1¾ mile.

*RVR 1800 authorized with the use of FD or AP or HUD to DA (NA when using St Louis Lambert Intl alimeter setting).

MALSRR

MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 direct FTZ VORTAC and hold.

ATIS	ST. LOUIS APP CON	SPIRIT TOWER*	GND CON	CLNC DEL	ST. LOUIS CLNC DEL	UNICOM
134.8	126.5 254.3	124.75 (CTAF) 0 257.2	121.7	133.1	121.7 (when tower closed)	122.95

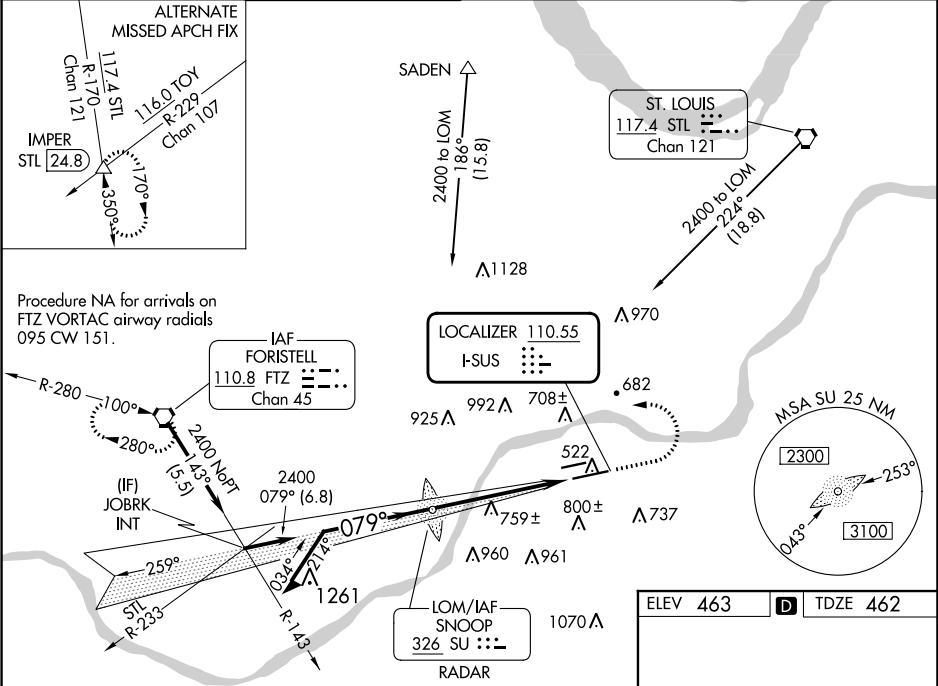

Remain within 10 NM

SU LOM RADAR

2400 259° 2185

2400 079°

GS 3.00° TCH 55

5.2 NM

CATEGORY	A	B	C	D
S-ILS 8R*	662/24 200 (200-½)			
S-LOC 8R	880/24	418 (500-½)	880/40	418 (500-¾)
CIRCLING	1100-1 637 (700-1)	1140-1 677 (700-1)	1160-2 697 (700-2)	1360-3 897 (900-3)

ELEV 463 D TDZE 462

MIRL Rwy 8L-26R 0

HIRL Rwy 8R-26L 0

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44