
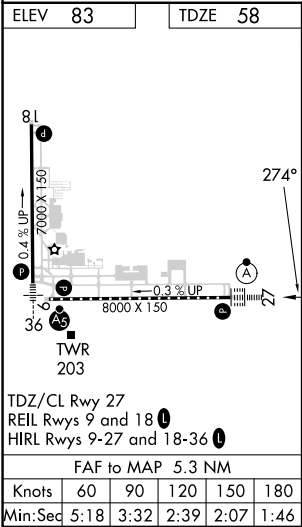


LOC/DME I-PLQ	APP CRS	Rwy Idg	8000
111.9	274°	TDZE	58
Chan 56		Apt Elev	83

ILS or LOC RWY 27

TALLAHASSEE INTL (TLH)

DME required.		ALSF-2 	MISSED APPROACH: Climb to 2000 then climbing right turn to 4000 on heading 092° and on SZW VORTAC R-140 to GACED INT/SZW 12.4 DME and hold, continue climb-in-hold to 4000.					
For inop ALS, increase S-ILS 27 Cat E visibility to RVR 4000 and S-LOC 27 Cats C, D and E visibility to 2 SM. SPADD FIX MINIMUMS increase S-LOC 27 Cats C, D and E visibility to RVR 5500.								
 ASR		ATIS		TALLAHASSEE APP CON ★	TALLAHASSEE TOWER ★	GND CON	CLNC DEL	UNICOM
		119.45 239.25		135.8 317.4	118.7(CTAF) 0 257.8	121.9 348.6	126.65 275.8	123.075

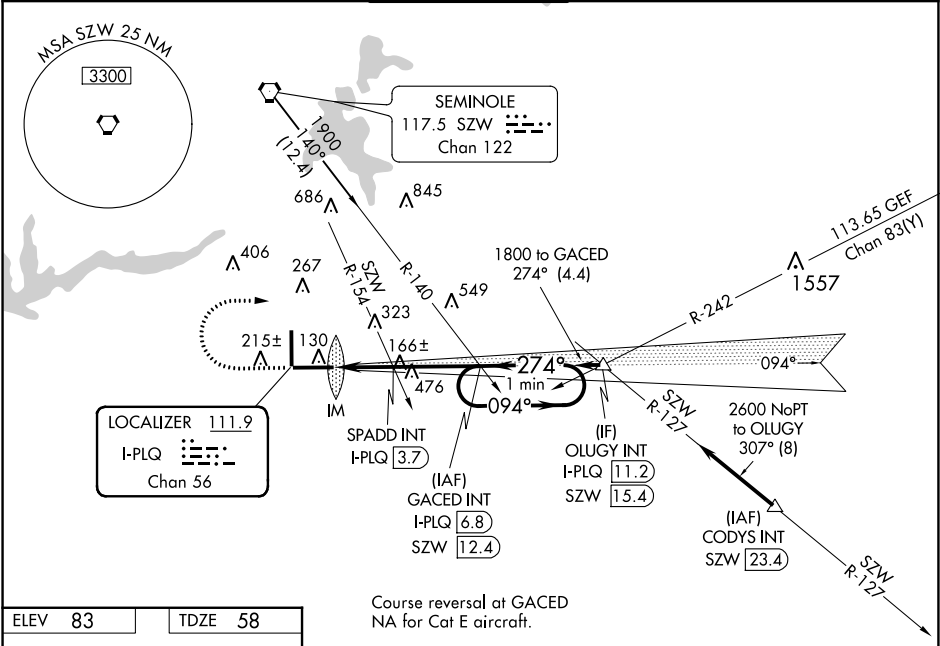

2000 4000 SZW R-140 GACED INT		GACED INT I-PLQ 6.8 SZW 12.4		One Minute Holding Pattern	
*LOC only		SPADD INT I-PLQ 3.7		1800 094° 1800 GS 3.00° TCH 59	
I-PLQ 1.5		*I-PLQ 2.5		274° 1800	
0.2 0.8 NM		1.2 NM		3.1 NM	
CATEGORY	A	B	C	D	E
S-ILS 27	258/18 200 (200-1/2)				
S-LOC 27	800/24 742 (800-1/2)	800/40 742 (800-3/4)	800-1 3/4 742 (800-1 3/4)		
CIRCLING	800-1 717 (800-1)	800-1 1/4 717 (800-1 1/4)	800-2 717 (800-2)	800-2 1/4 717 (800-2 1/4)	1000-3 917 (1000-3)
SPADD FIX MINIMUMS					
S-LOC 27	420/24	362 (400-1/2)	420/35	362 (400-3/4)	
CIRCLING	580-1 497 (500-1)	600-1 517 (600-1)	640-1 1/2 557 (600-1 1/2)	800-2 1/4 717 (800-2 1/4)	1000-3 917 (1000-3)