
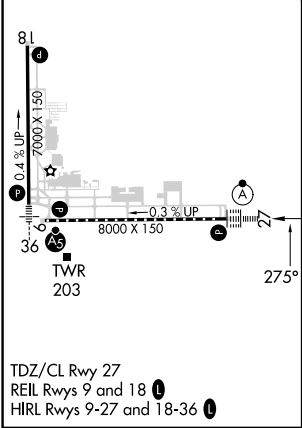


WAAS CH 97302 W27A	APP CRS 275°	Rwy Idg TDZE 58 Apt Elev 83
--	------------------------	---

RNAV (GPS) RWY 27
Tallahassee Intl (TLH)

RNP APCH. ▼ ▲ ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.		ALSF-2 ▲	MISSED APPROACH: Climb to 3000 direct RAGKO and hold.		
ATIS 119.45 239.25	Tallahassee APP CON ★ 135.8 317.4	Tallahassee Tower ★ 118.7 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 126.65 275.8	UNICOM 123.075

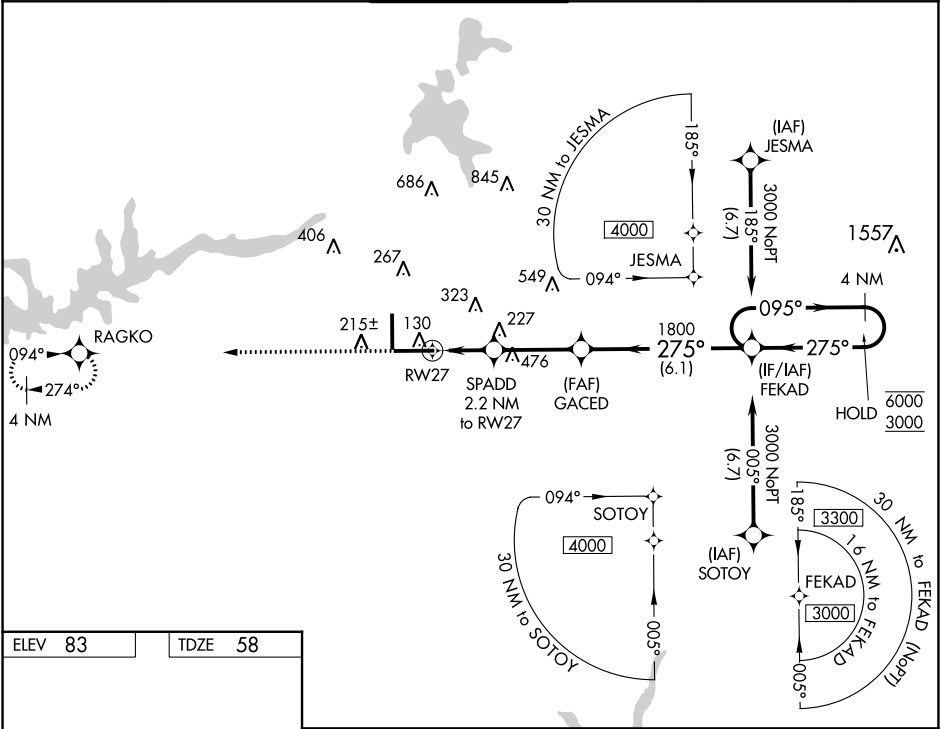

3000 ↑ RAGKO		SPADD 2.2 NM to RW27		GACED 1800		FEKAD 4 NM Holding Pattern	
*LNAV only.		*1.2 NM to RW27		275°		095° → 6000 ← 275° 3000	
RW27		800*		1800		GP 3.00° TCH 59	
1.2 NM		1 NM		3.1 NM		6.1 NM	
CATEGORY	A		B		C		D
LPV DA	258/18		200 (200-½)				
LNAV/VNAV DA	375/30		317 (300-⅝)				
LNAV MDA	480/24		422 (400-½)		480/40		422 (400-¾)
CIRCLING	580-1 497 (500-1)		600-1 517 (600-1)		640-1½ 557 (600-1½)		800-2¼ 717 (800-2¼)

SE-3, 22 FEB 2024 to 21 MAR 2024

SE-3, 22 FEB 2024 to 21 MAR 2024